

CFI-1000 series


Issued	Checked	Approved
<div>SIE CS '20.12.16 Miyawaki</div>		<div>SIE CS '20.12.16 Monden</div>

SM-PS5-0023E-01

PlayStation®5

BOARD SERVICE MANUAL 1st edition

for EDM-010 BOARD



Sony
Interactive
Entertainment

Sony Interactive Entertainment
CS Department



Published in Japan ©2020. 12

SAFETY CHECK-OUT


After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

- 1. Check the area of your repair for unsoldered or poorly soldered connections. Check the entire board surface for solder splashes and bridges.
- 2. Check the interboard wiring to ensure that no wires are “pinched” or contact high-wattage resistors.
- 3. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
- 4. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
- 5. Check the power cable for cracks and abrasion. Recommend the replacement of any such power cable to the customer.
- 6. Check the B+ voltage to see it is at the values specified.
- 7. Check the metal trim, “metallized” knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.


SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  OR DOTTED LINE WITH MARK  ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

ATTENTION AU COMPOSANT AYANT RAPPORT À LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÉS PAR UNE MARQUE  SUR LES DIAGRAMMES SCHÉMATIQUES ET LA LISTE DES PIÈCES SONT CRITIQUES POUR LA SÉCURITÉ DE FONCTIONNEMENT. NE REMPLACER CES COMPOSANTS QUE PAR DES PIÈCES SONY DONT LES NUMÉROS SONT DONNÉS DANS CE MANUEL OU DANS LES SUPPLÉMENTS PUBLIÉS PAR SONY.


SPECIAL COMPONENT NOTICE

The components identified by mark  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microampers.). Leakage current can be measured by any one of three methods.

- 1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers’ instructions to use these instruments.
- 2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
- 3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The “limit” indication is 0.75 V, so analog meters must have an accurate low-voltage scale. The Simpson 250 and Sanwa SH-63Trd are examples of a passive VOM that is suitable. Nearly all battery operated digital multimeters that have a 2 V AC range are suitable. (See Fig. A)

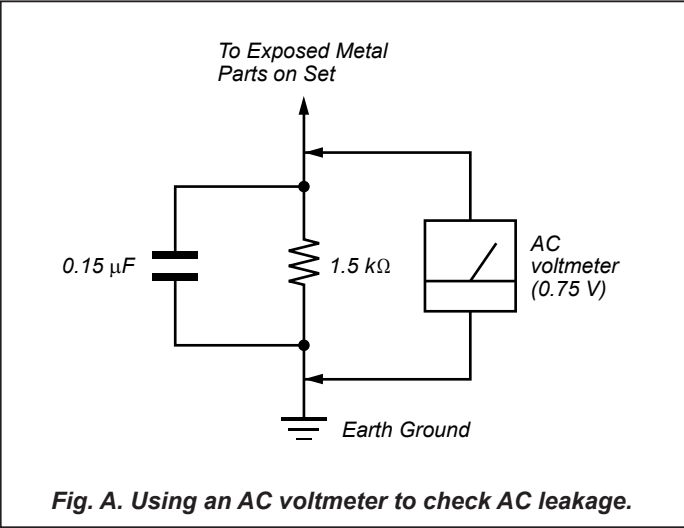

CAUTION:

The use of optical instruments with this product will increase eye hazard.

CAUTION

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

WARNING!!

WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION, BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 25 cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.

CAUTION

The use of optical instruments with this product will increase eye hazard. As the laser beam used in this CD/DVD ROM Drive is harmful to eyes, do not attempt disassemble the cabinet. Refer servicing to qualified personnel only.

CAUTION

Ensure that this product is disconnected from the power plug before the laser protective housing is removed.

CAUTION

CLASS 2 LASER RADIATION INSIDE THE EQUIPMENT. DO NOT CONNECT TO AC MAINS WHEN IT IS DISASSEMBLED.

CAUTION

Ensure that this product is disconnected from the power plug before the laser protective housing is removed.

CAUTION

Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to the instructions.

Lithium Batteries

If an equipment is provided with a replaceable lithium battery, the following applies:

- if the battery is placed in an OPERATOR ACCESS AREA, there shall be a warning close to the battery or in both the operating and the service instructions:
- if the battery is placed elsewhere in the equipment, there shall be a warning close to the battery or in the service instructions.

CHANGE NOTE

Edition	Date	Description
1st	2020/12/16	

TABLE OF CONTENTS

1. CIRCUIT DIAGRAM

1-1 EDM-010 Board(1/23)

.....

Main SoC (Signal)

1-2 EDM-010 Board(2/23)

.....

Main SoC (Power)

1-3 EDM-010 Board(3/23)

.....

Main SoC (JTAG)

1-4 EDM-010 Board(4/23)

.....

GDDR6(Ch.A/B)

1-5 EDM-010 Board(5/23)

.....

GDDR6(Ch.C/D)

1-6 EDM-010 Board(6/23)

.....

GDDR6(Ch.E/F)

1-7 EDM-010 Board(7/23)

.....

GDDR6(Ch.G/H)

1-8 EDM-010 Board(8/23)

.....

HDMI Out

1-9 EDM-010 Board(9/23)

.....

USB Type-C

1-10 EDM-010 Board(10/23)

.....

USB Type-A

1-11 EDM-010 Board(11/23)

.....

Flash Controller

1-12 EDM-010 Board(12/23)

.....

DDR4

1-13 EDM-010 Board(13/23)

.....

NAND

1-14 EDM-010 Board(14/23)

.....

M.2 I/F

1-15 EDM-010 Board(15/23)

.....

Subsystem

1-16 EDM-010 Board(16/23)

.....

MISC

1-17 EDM-010 Board(17/23)

.....

BT/WiFi

1-18 EDM-010 Board(18/23)

.....

GbE

1-19 EDM-010 Board(19/23)

.....

SATA

1-20 EDM-010 Board(20/23)

.....

Power Source(1)

1-21 EDM-010 Board(21/23)

.....

Power Source(2)

1-22 EDM-010 Board(22/23)

...

Power Source(VRM)

1-23 EDM-010 Board(23/23)

.....

Power Source(SSD)

1-24 EDS-010 Board(1/1)

1-25 EDL-010 Board(1/1)

1-26 EDU-010 Board(1/1)

..

2. PRINTED WIRING BOARDS

2-1.

EDM-010 Board (Side A)

2-2.

EDM-010 Board (Side B)

2-3.

EDS-010 Board (Side A)

2-4.

EDS-010 Board (Side B)

2-5.

EDL-010 Board (Side A)

2-6.

EDL-010 Board (Side B)

2-7.

EDU-010 Board (Side A)

2-8.

EDU-010 Board (Side B)

3. ELECTRICAL PARTS LIST

3-1.

EDM-010 Board

3-2.

EDS-010 Board

3-3.

EDL-010 Board

3-4.

EDU-010 Board

SECTION 1
CIRCUIT DIAGRAM


Note on Schematic Diagram:

- All capacitors are in μF unless otherwise noted.
pF: $\mu\mu\text{F}$ 50 WV or less are not indicated except for electrolytics and tantalums.
- All resistors are in Ω and $1/4$ W or less unless otherwise specified.
- % : indicates tolerance.


Note: The components identified by mark \triangle or dotted line with mark \triangle are critical for safety. Replace only with part number specified.	Note: Les composants identifiés par une marque \triangle sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.
--	--

Note: * : With Drive Parts


1-1.EDM-010 Board (1/23)

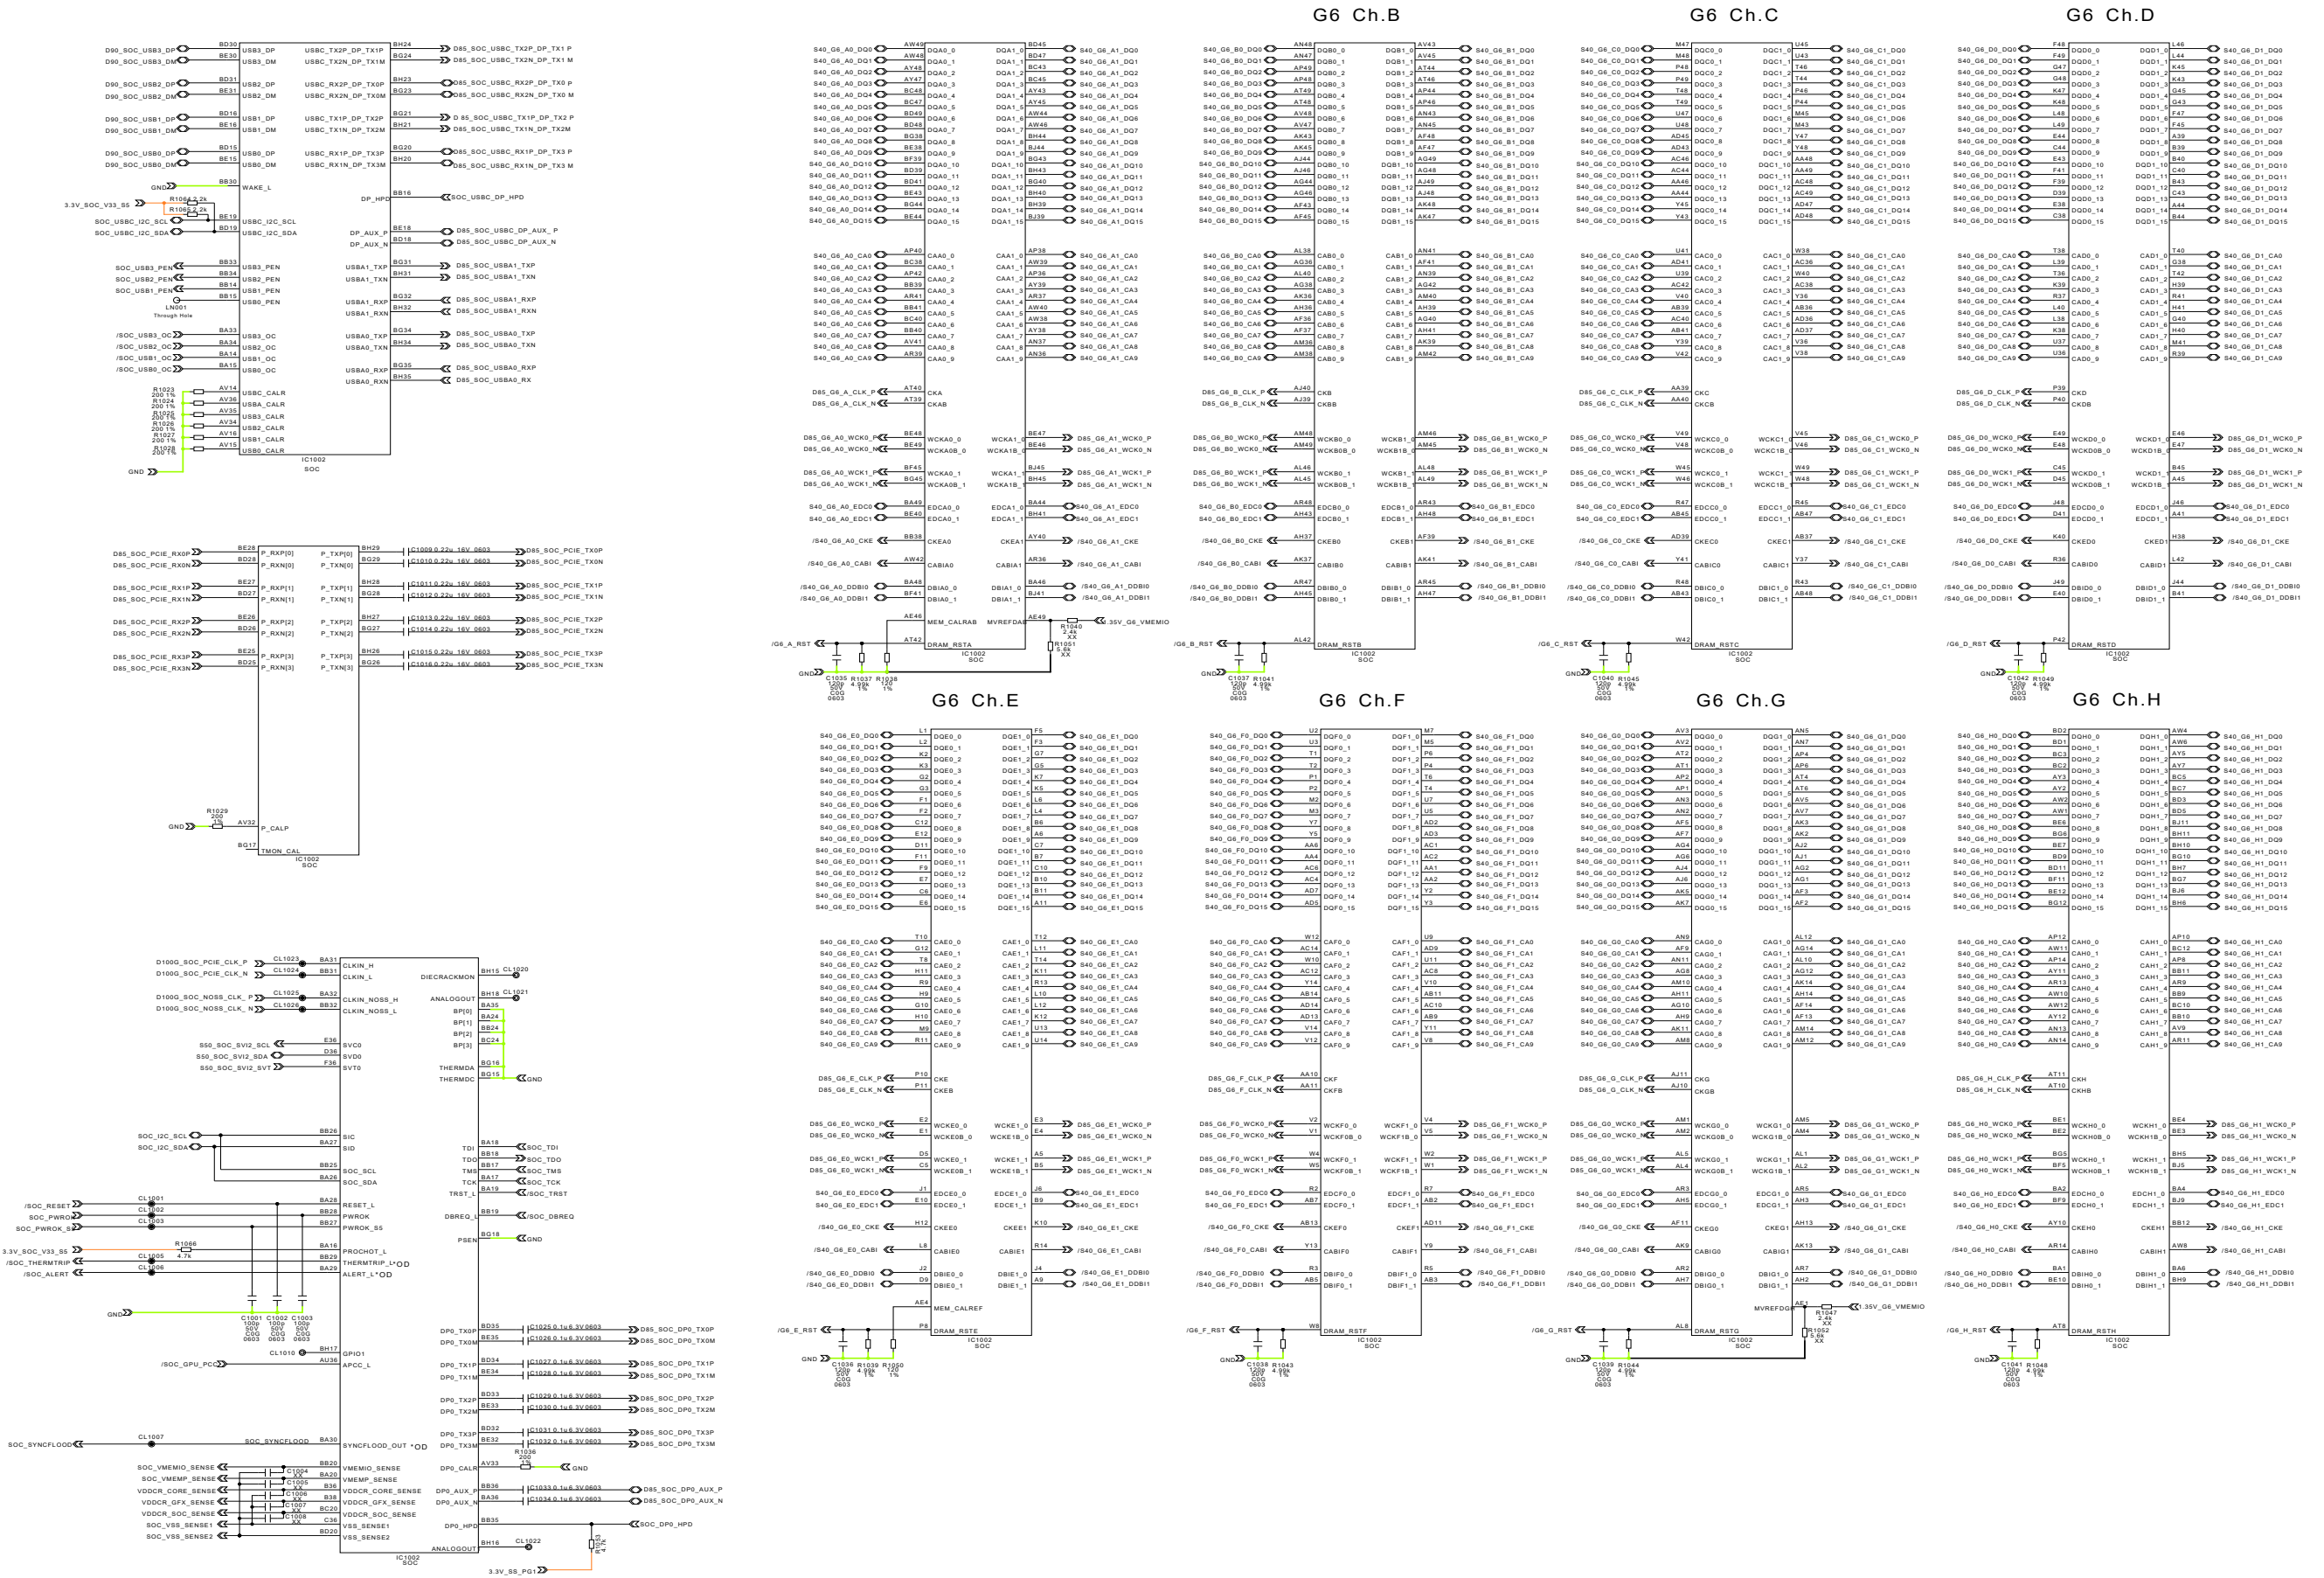


1-2. EDM-010 Board (2/23)

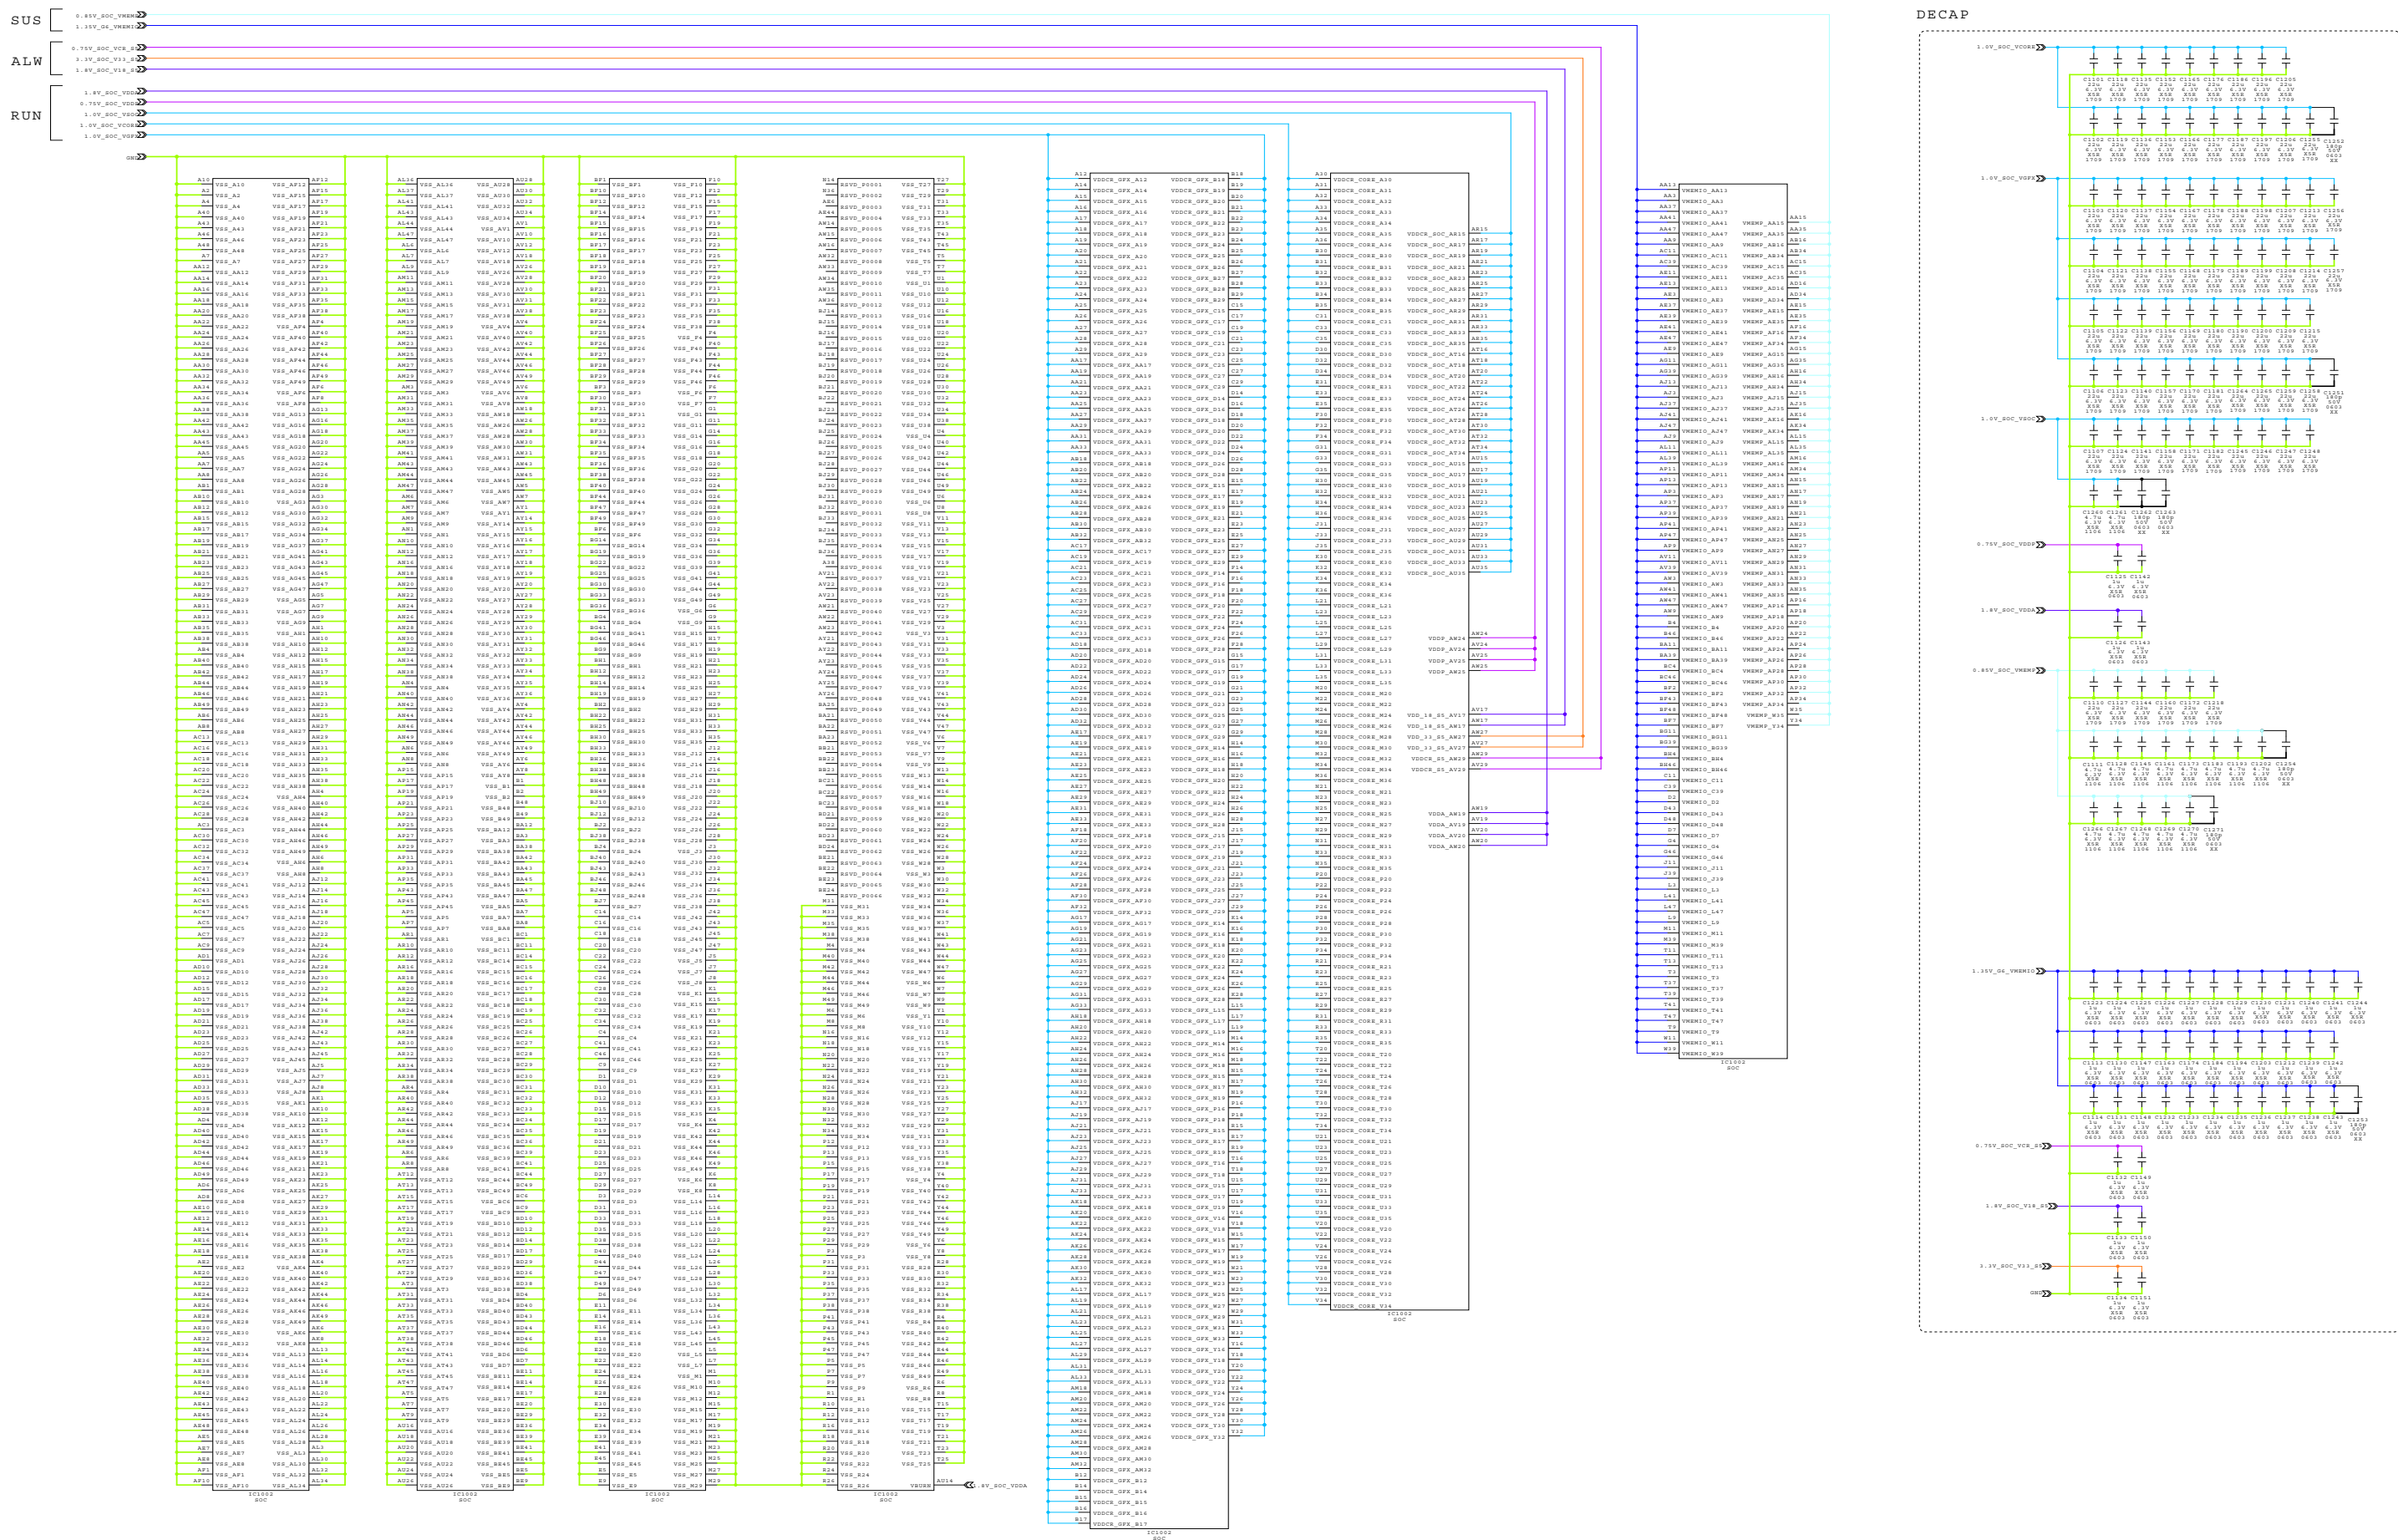


1-3. EDM-010 Board (3/23)

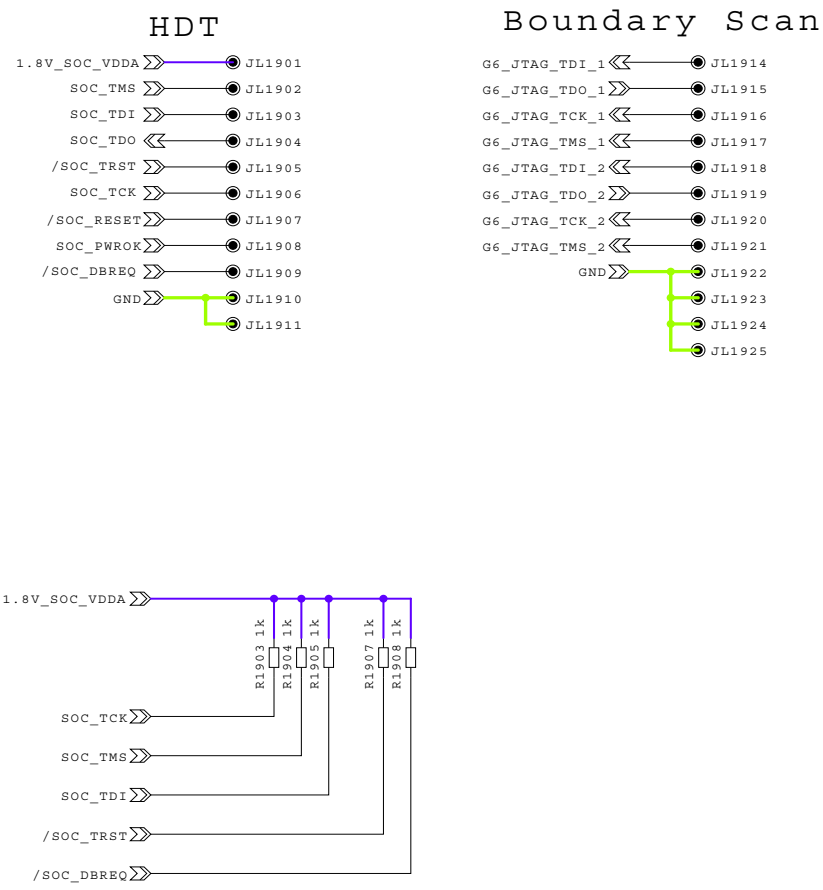


1-4. EDM-010 Board (4/23)

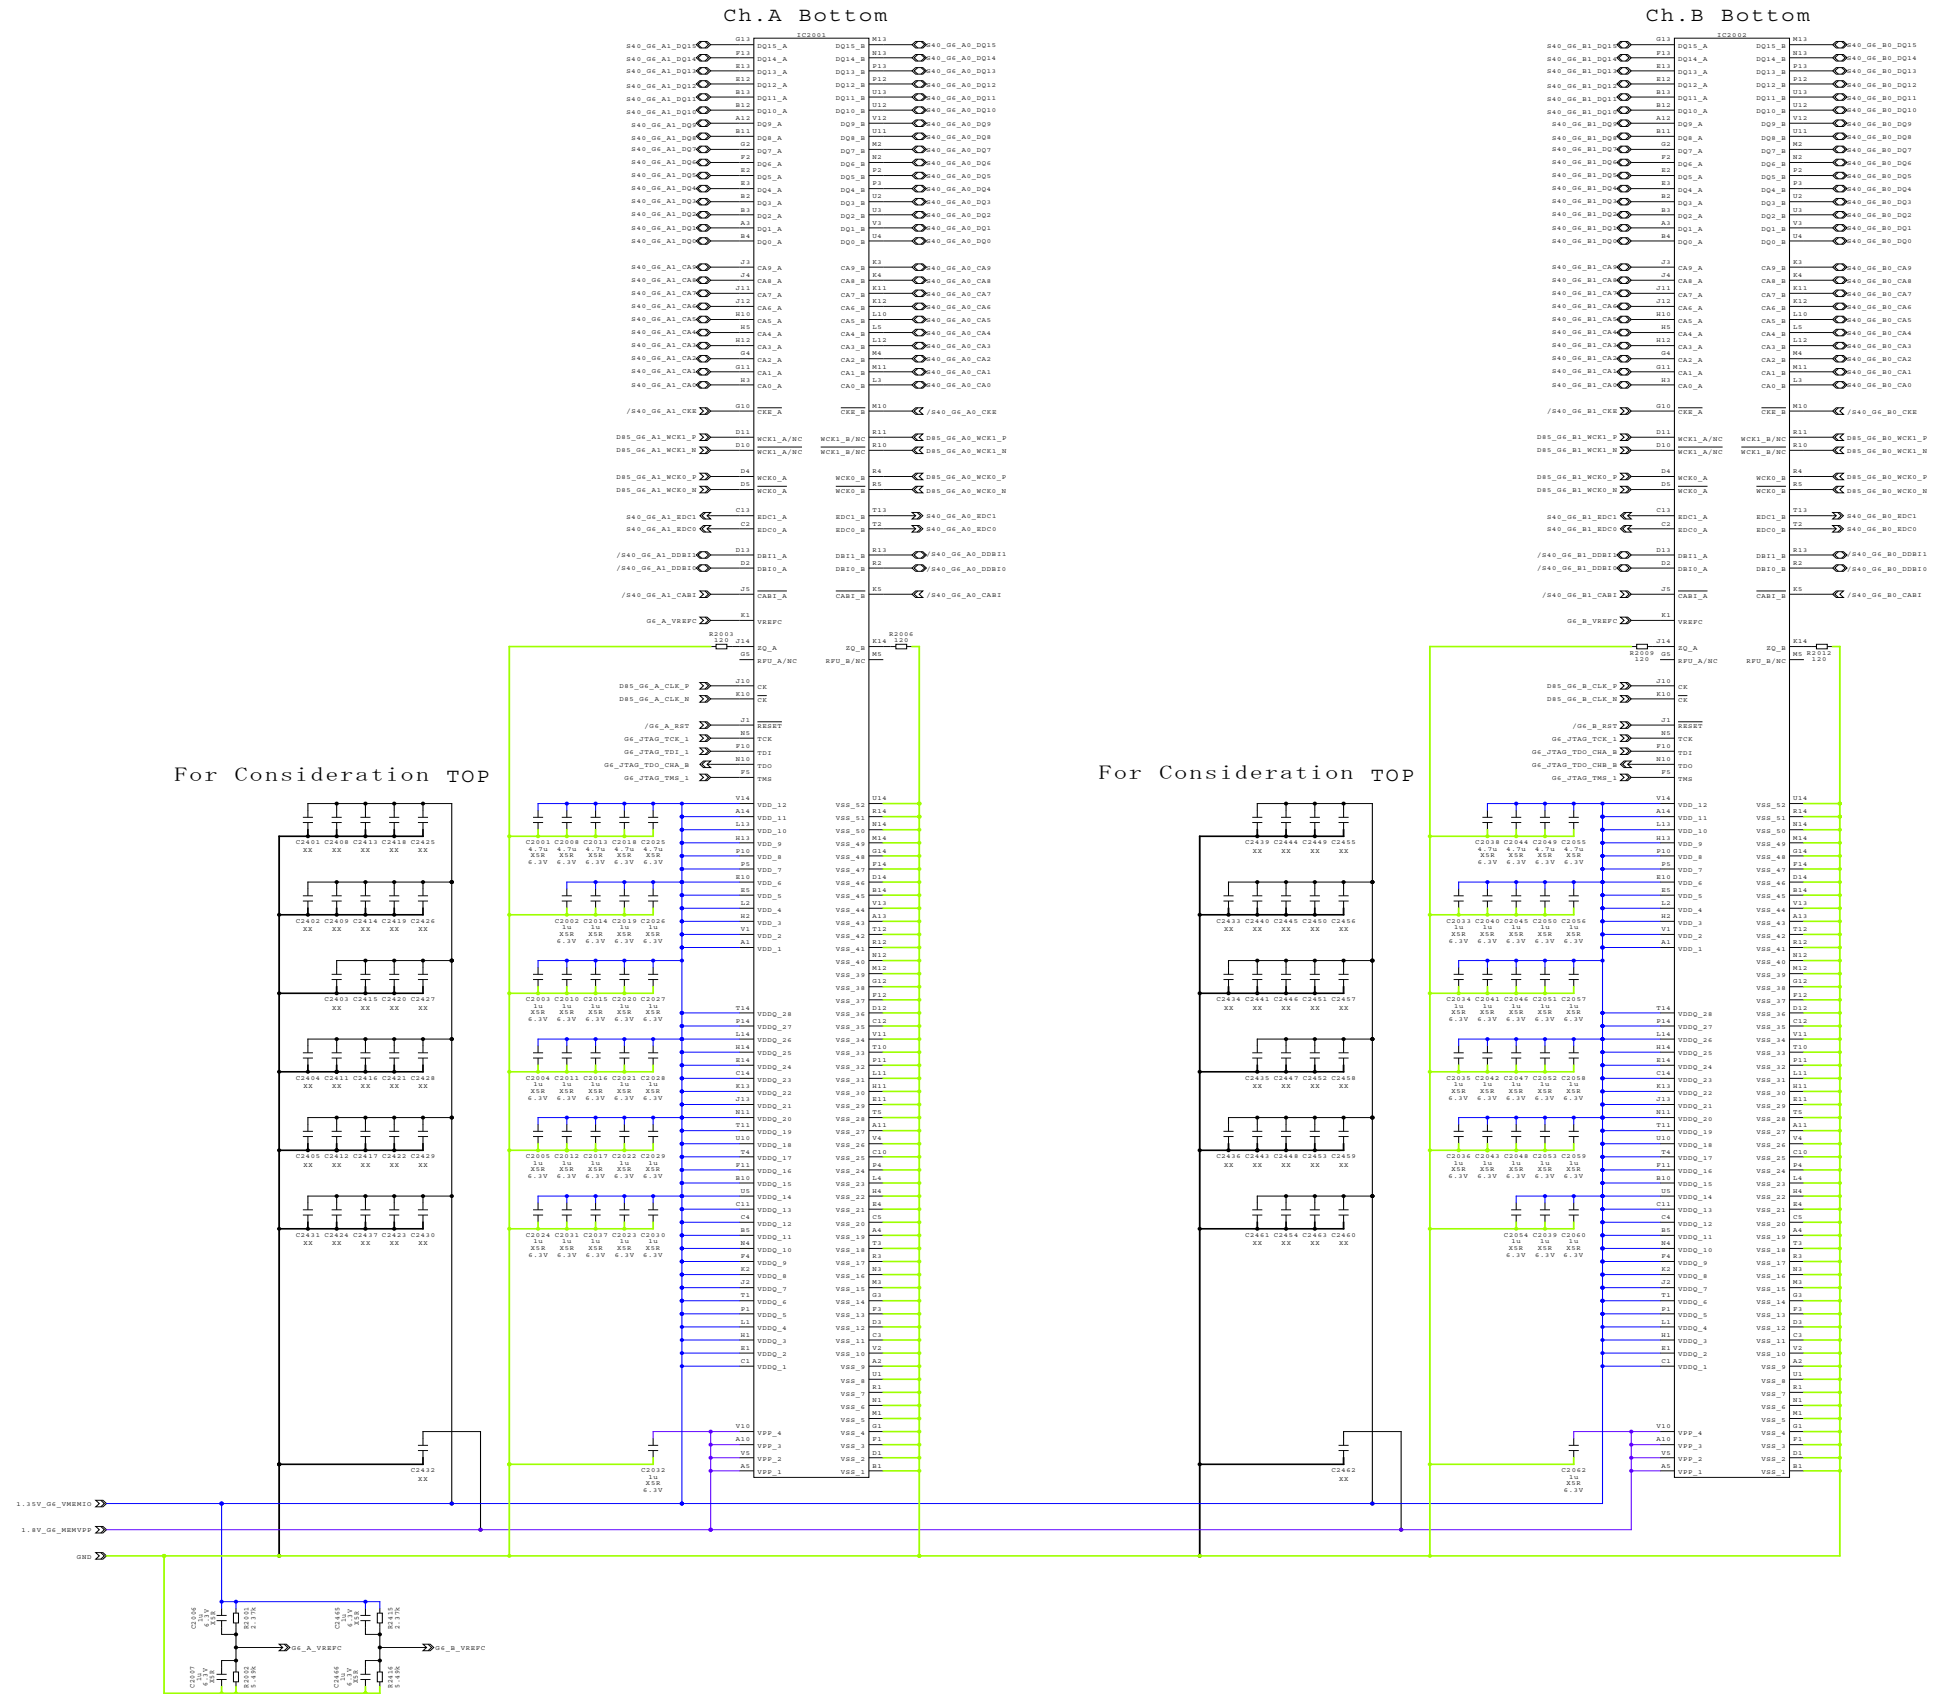


1-5. EDM-010 Board (5/23)

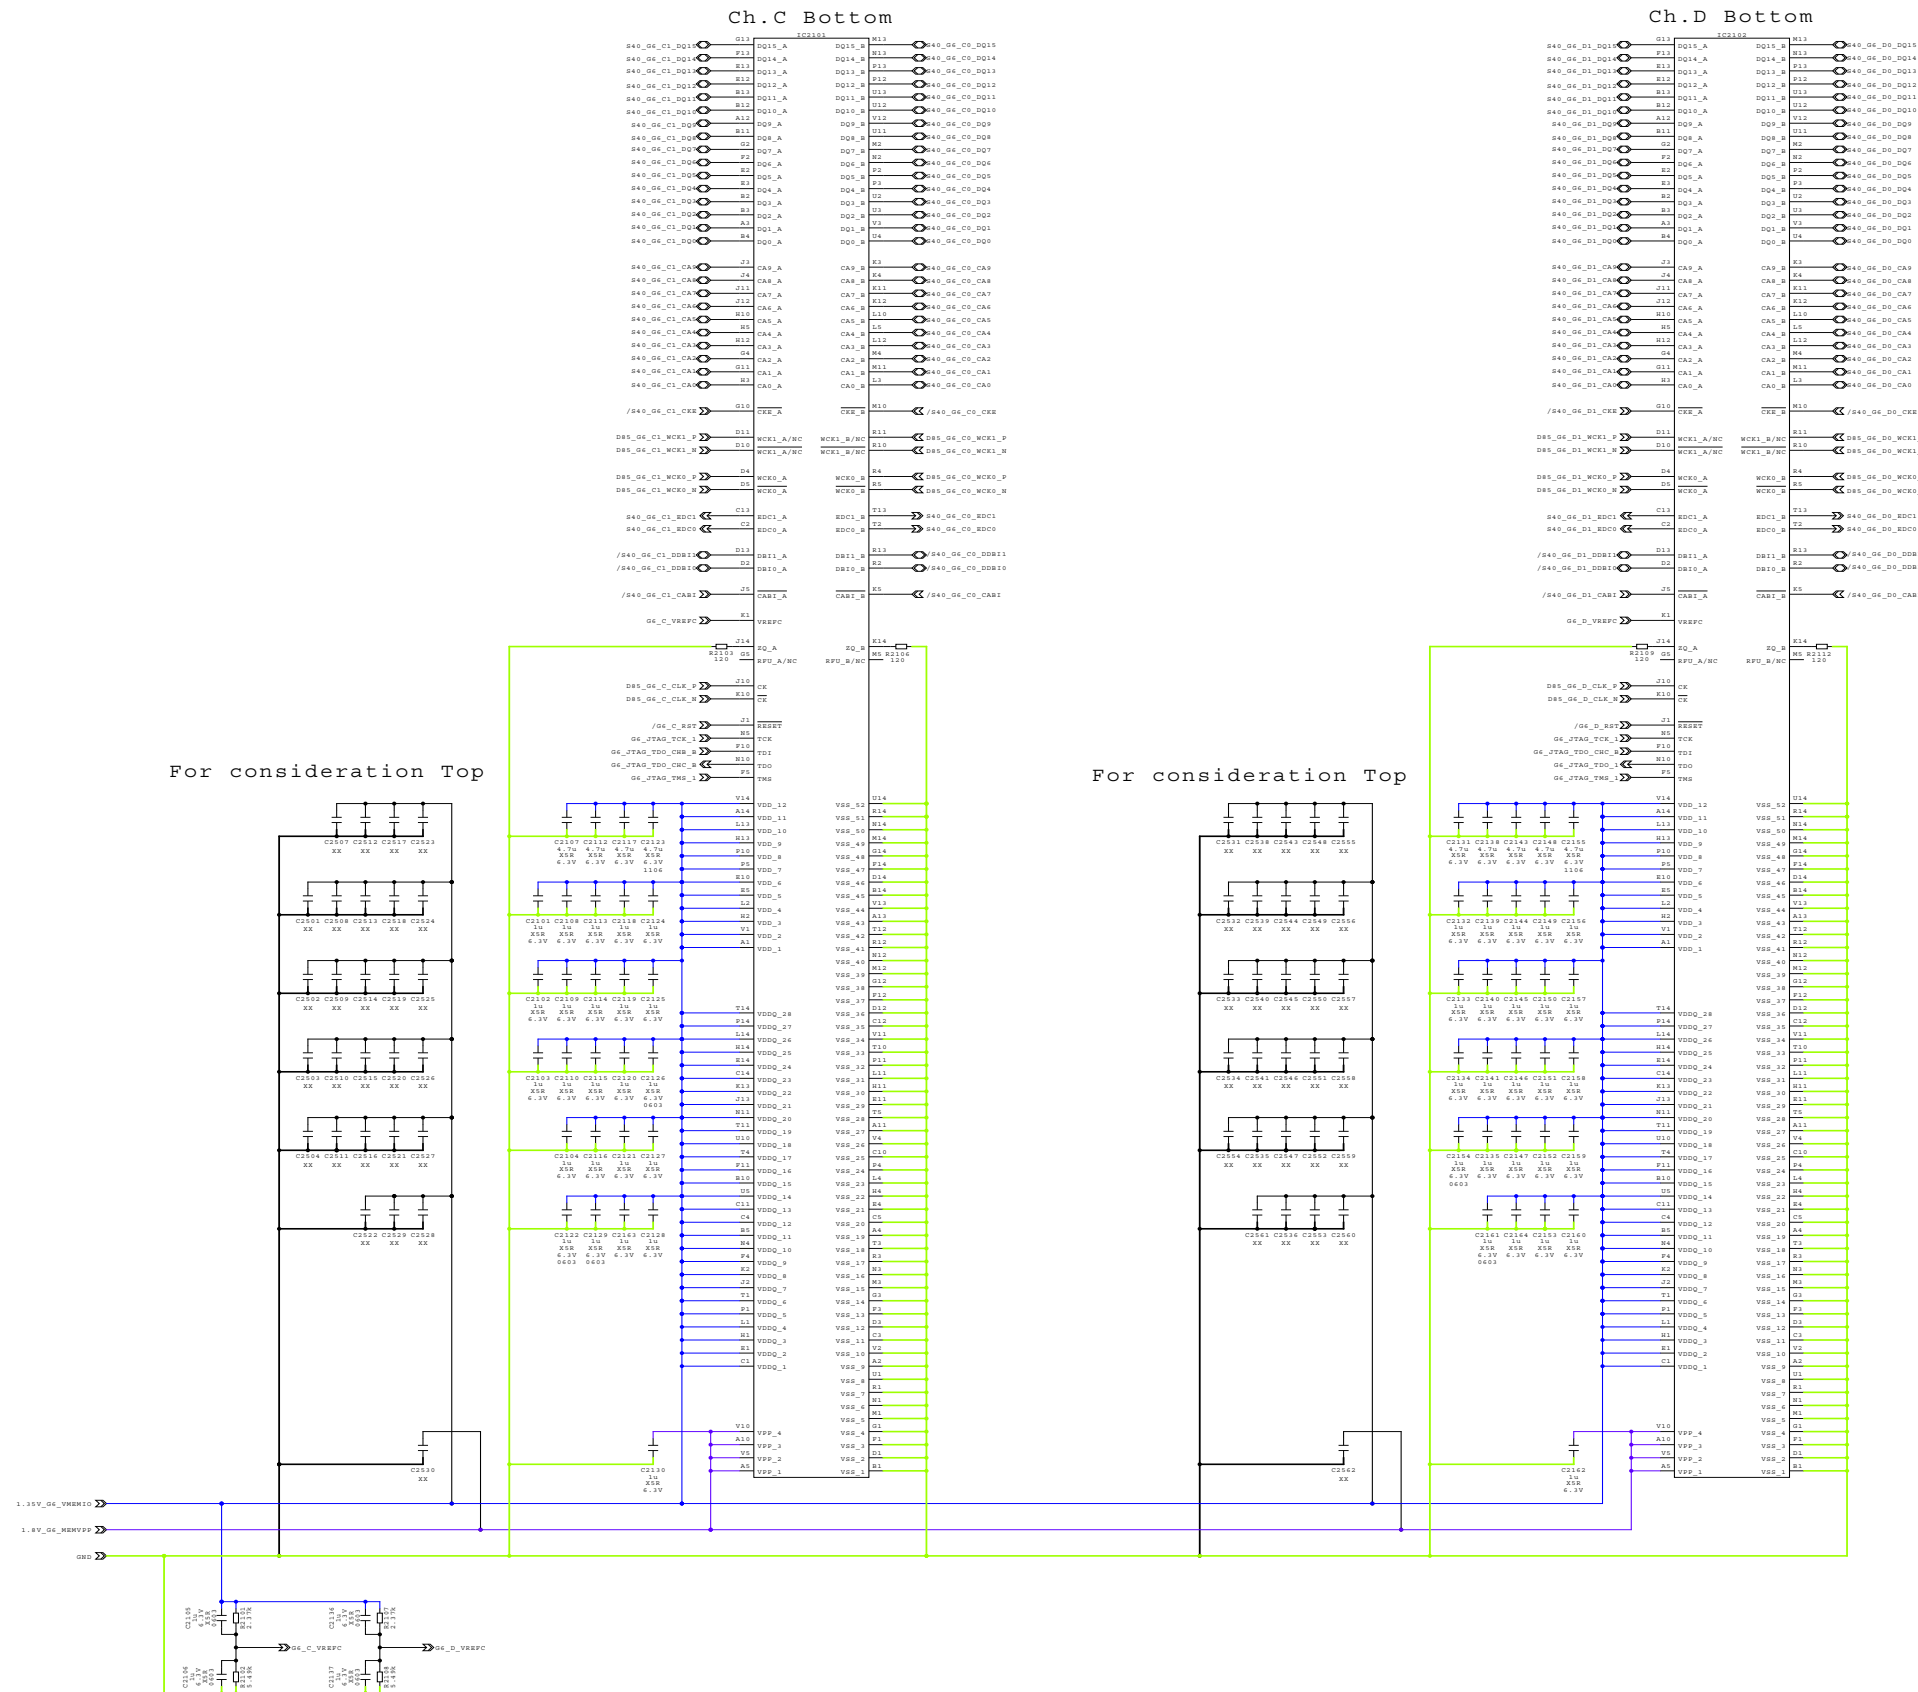


1-6. EDM-010 Board (6/23)

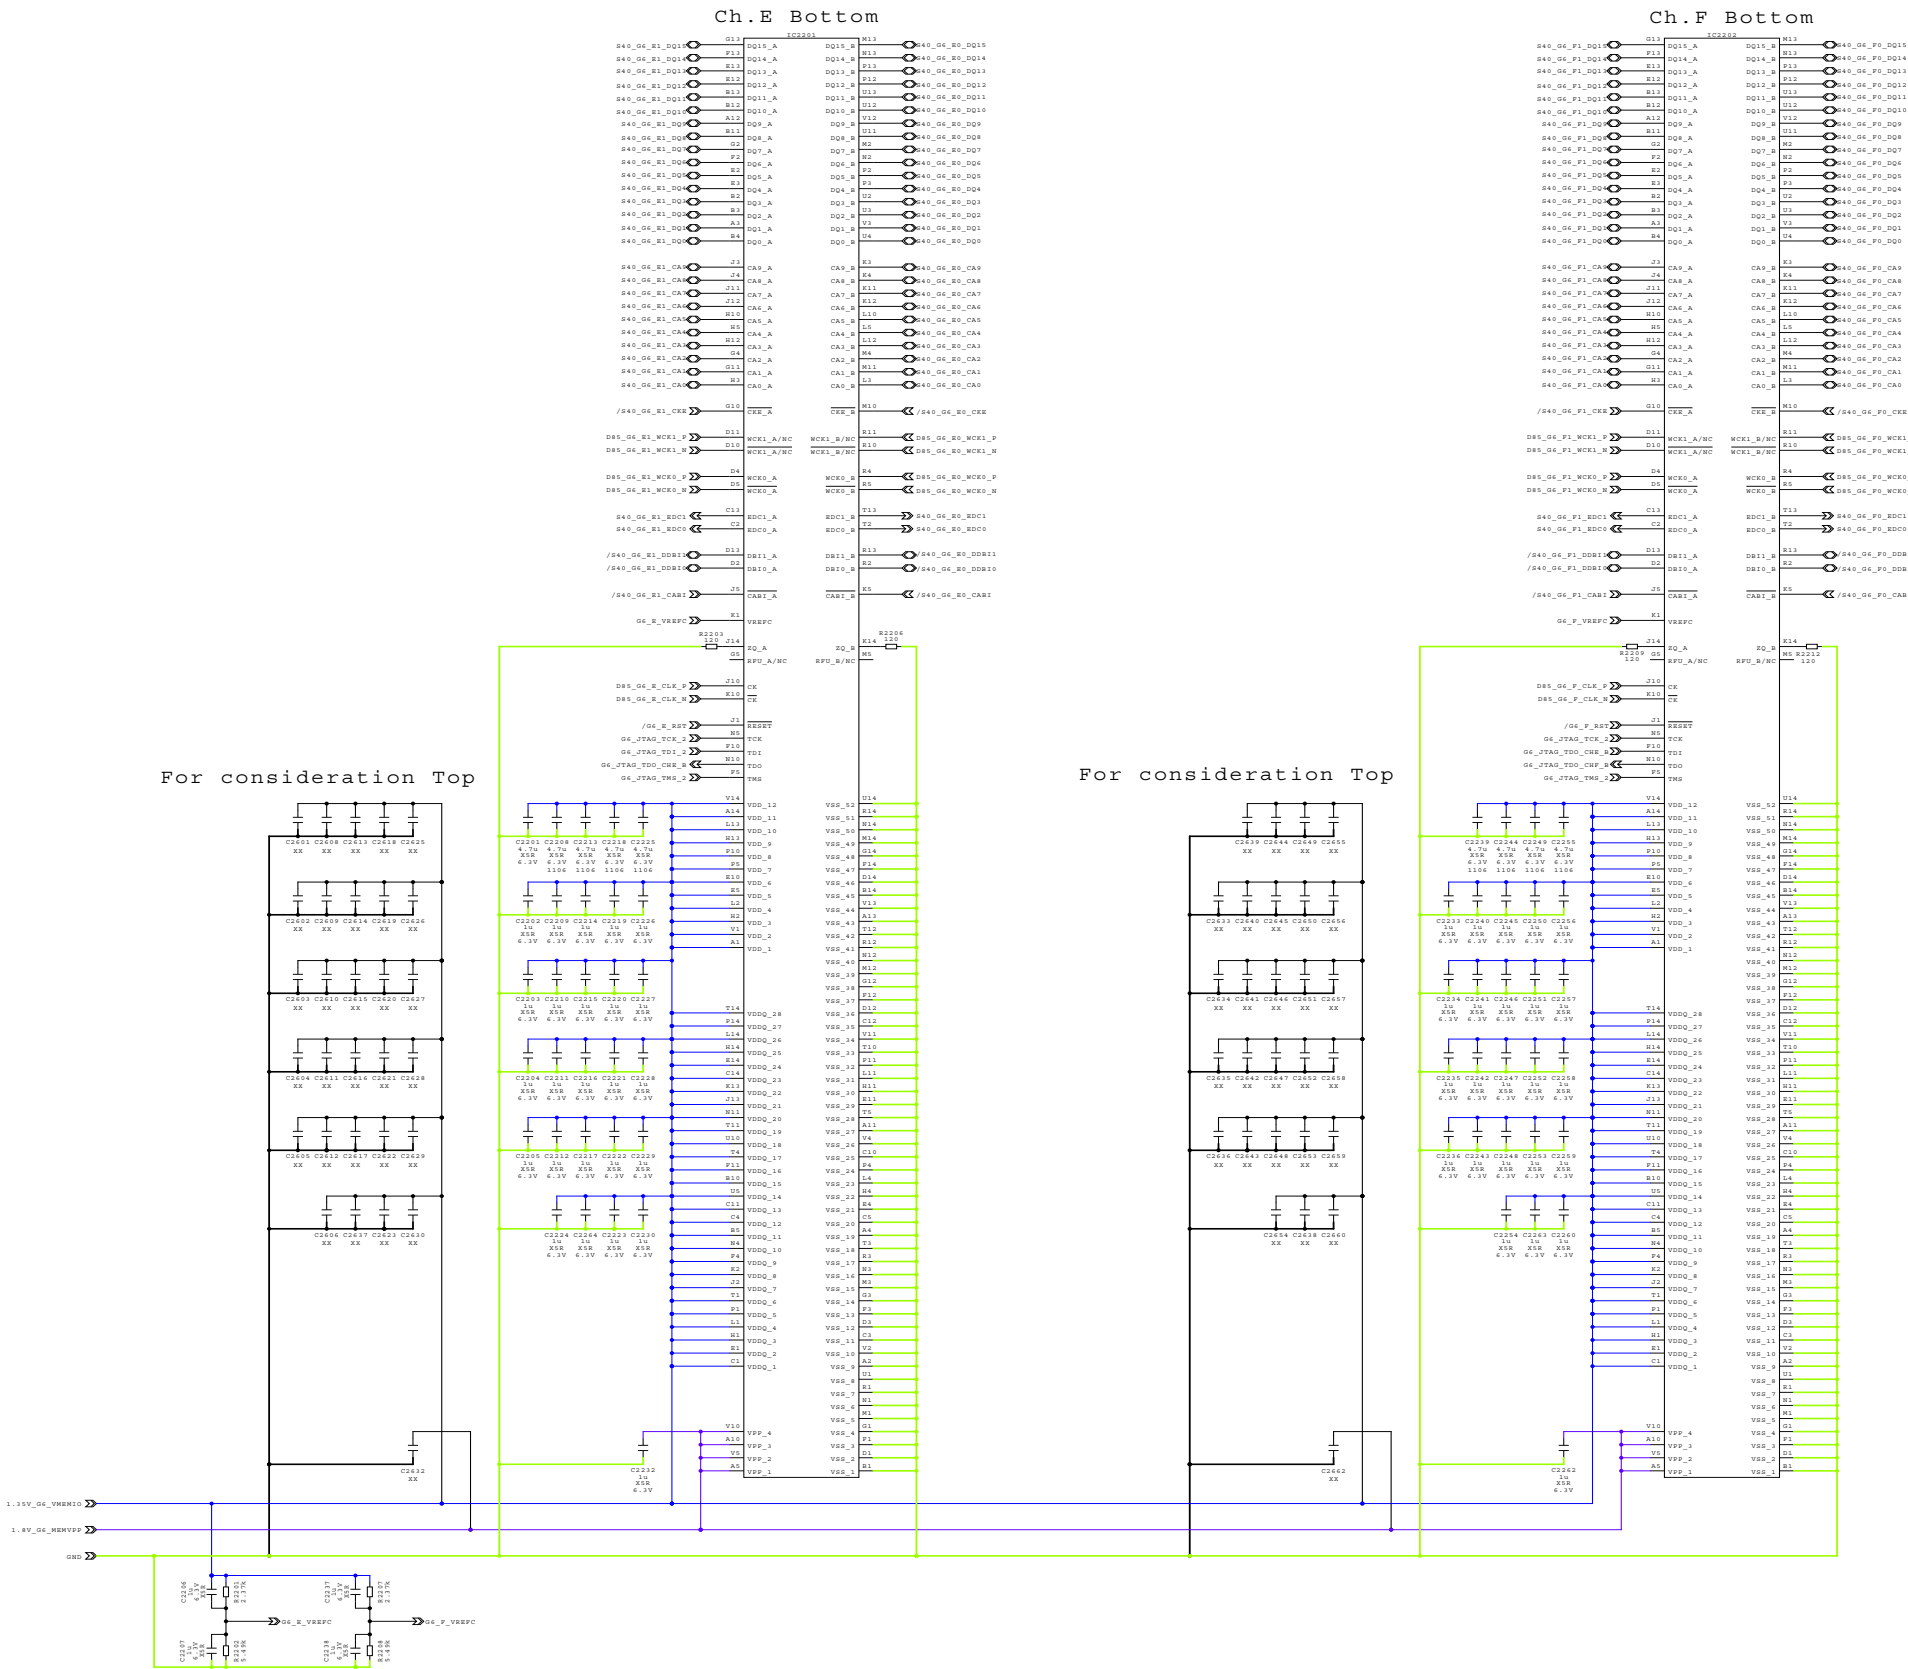

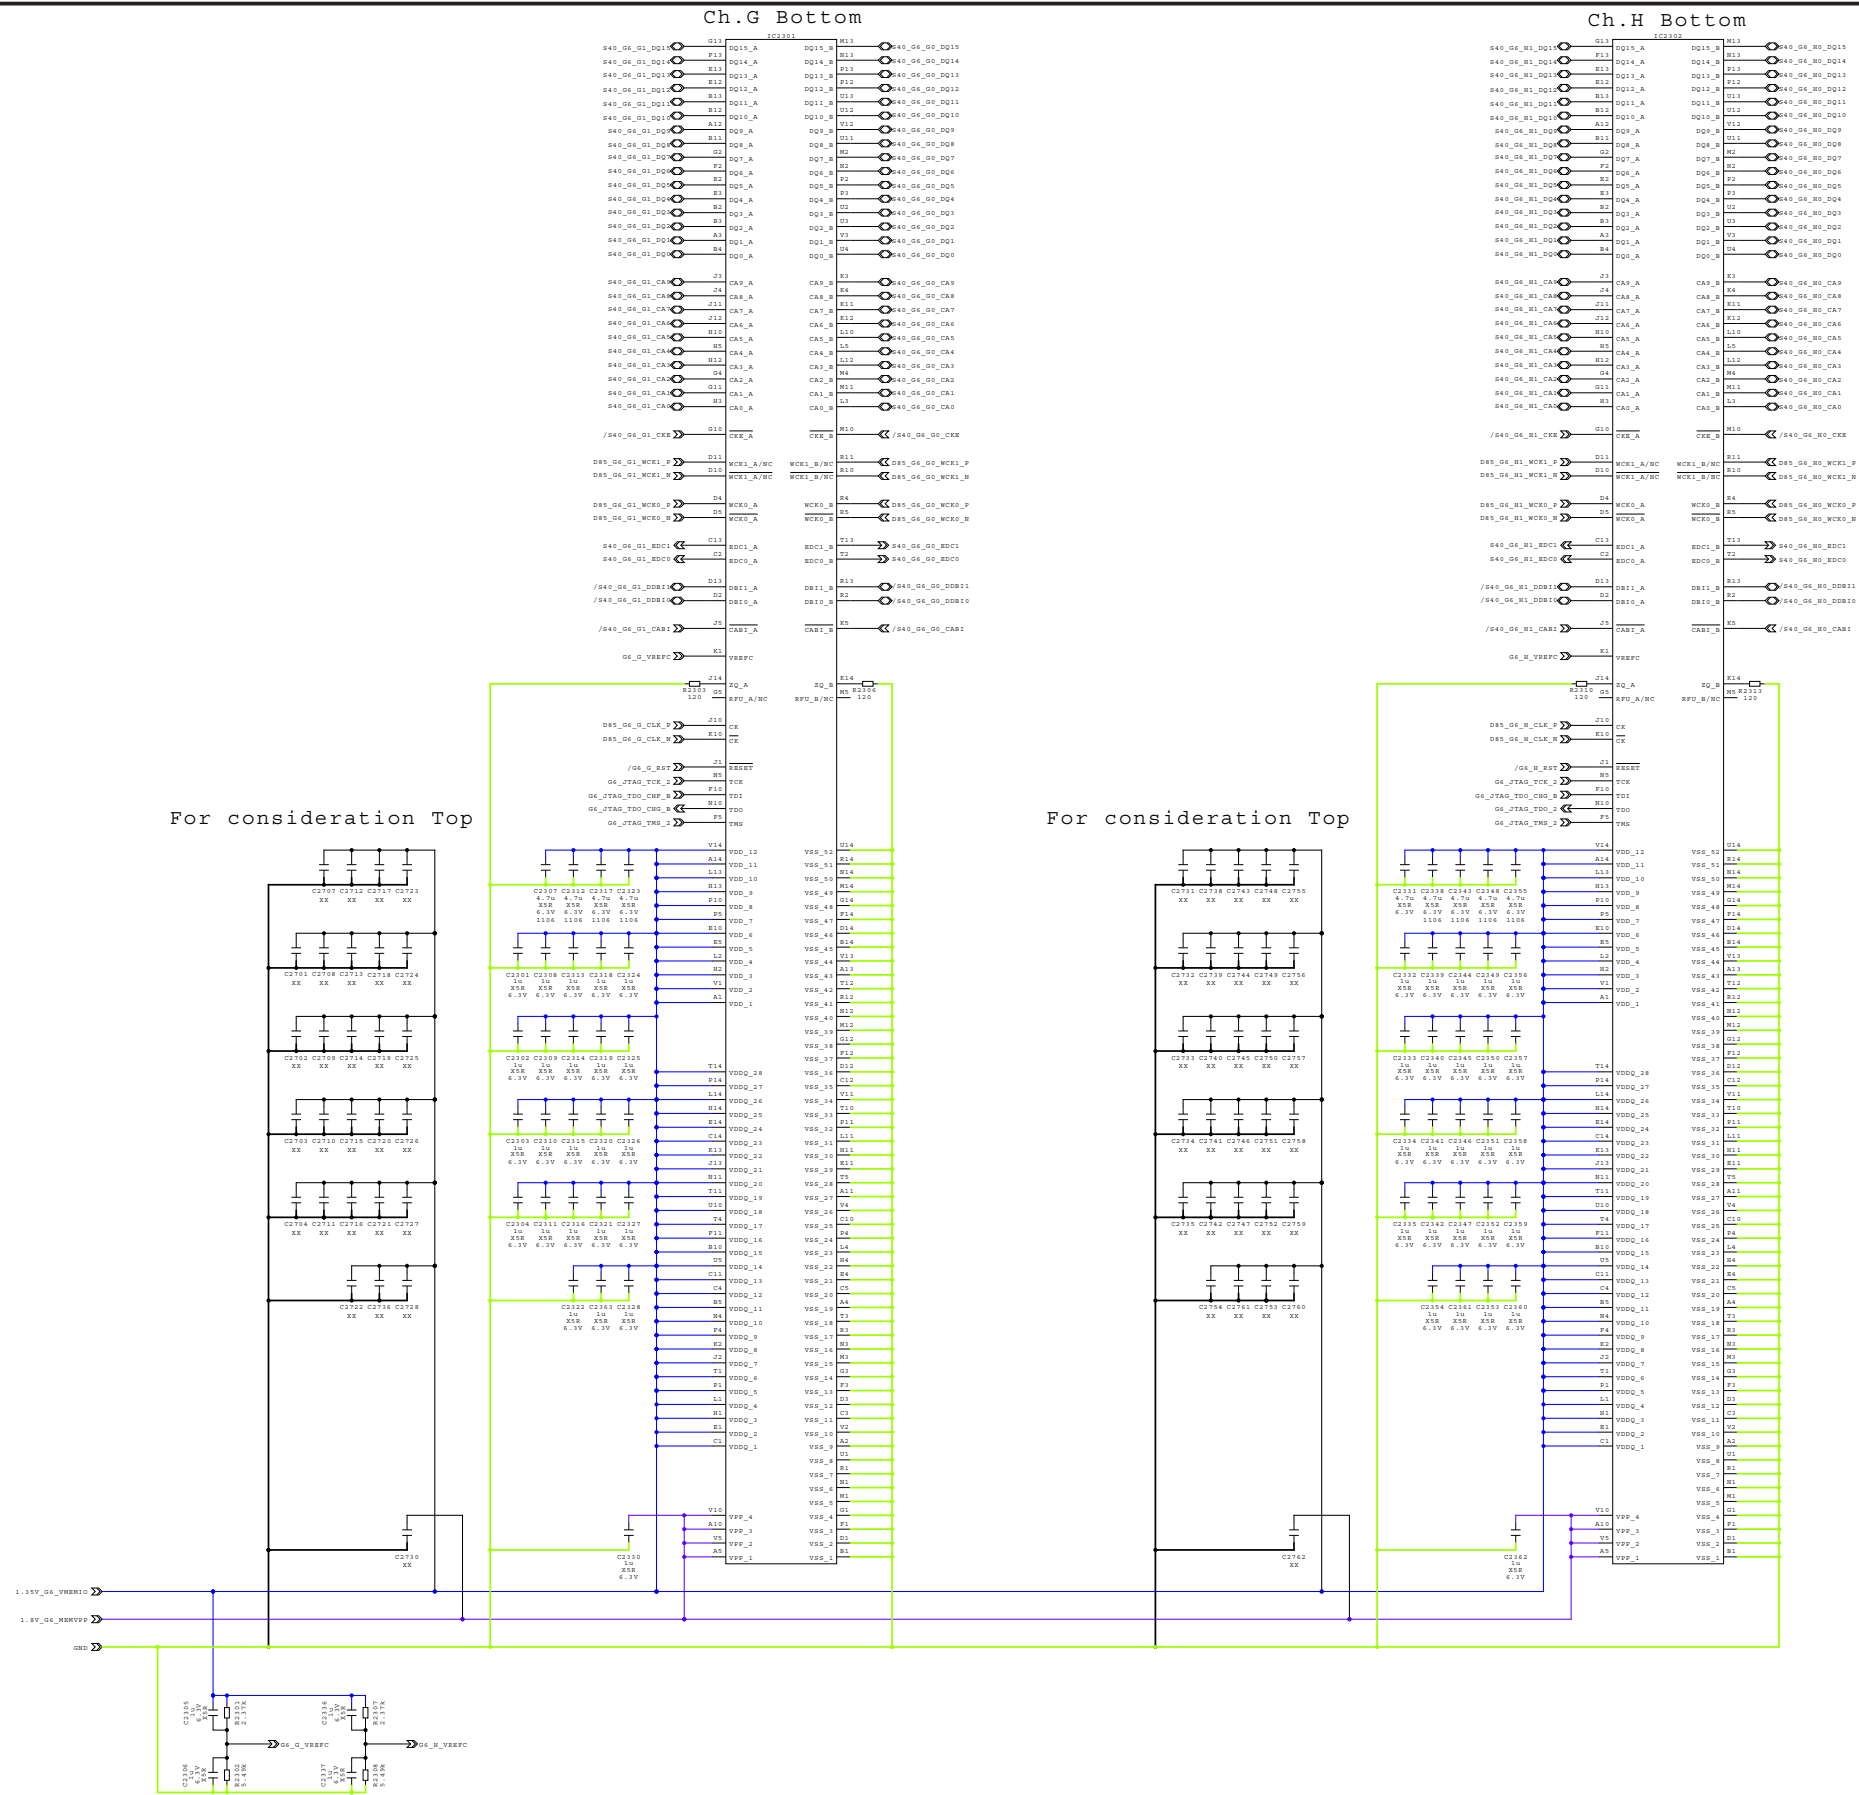


1-7. EDM-010 Board (7/23)

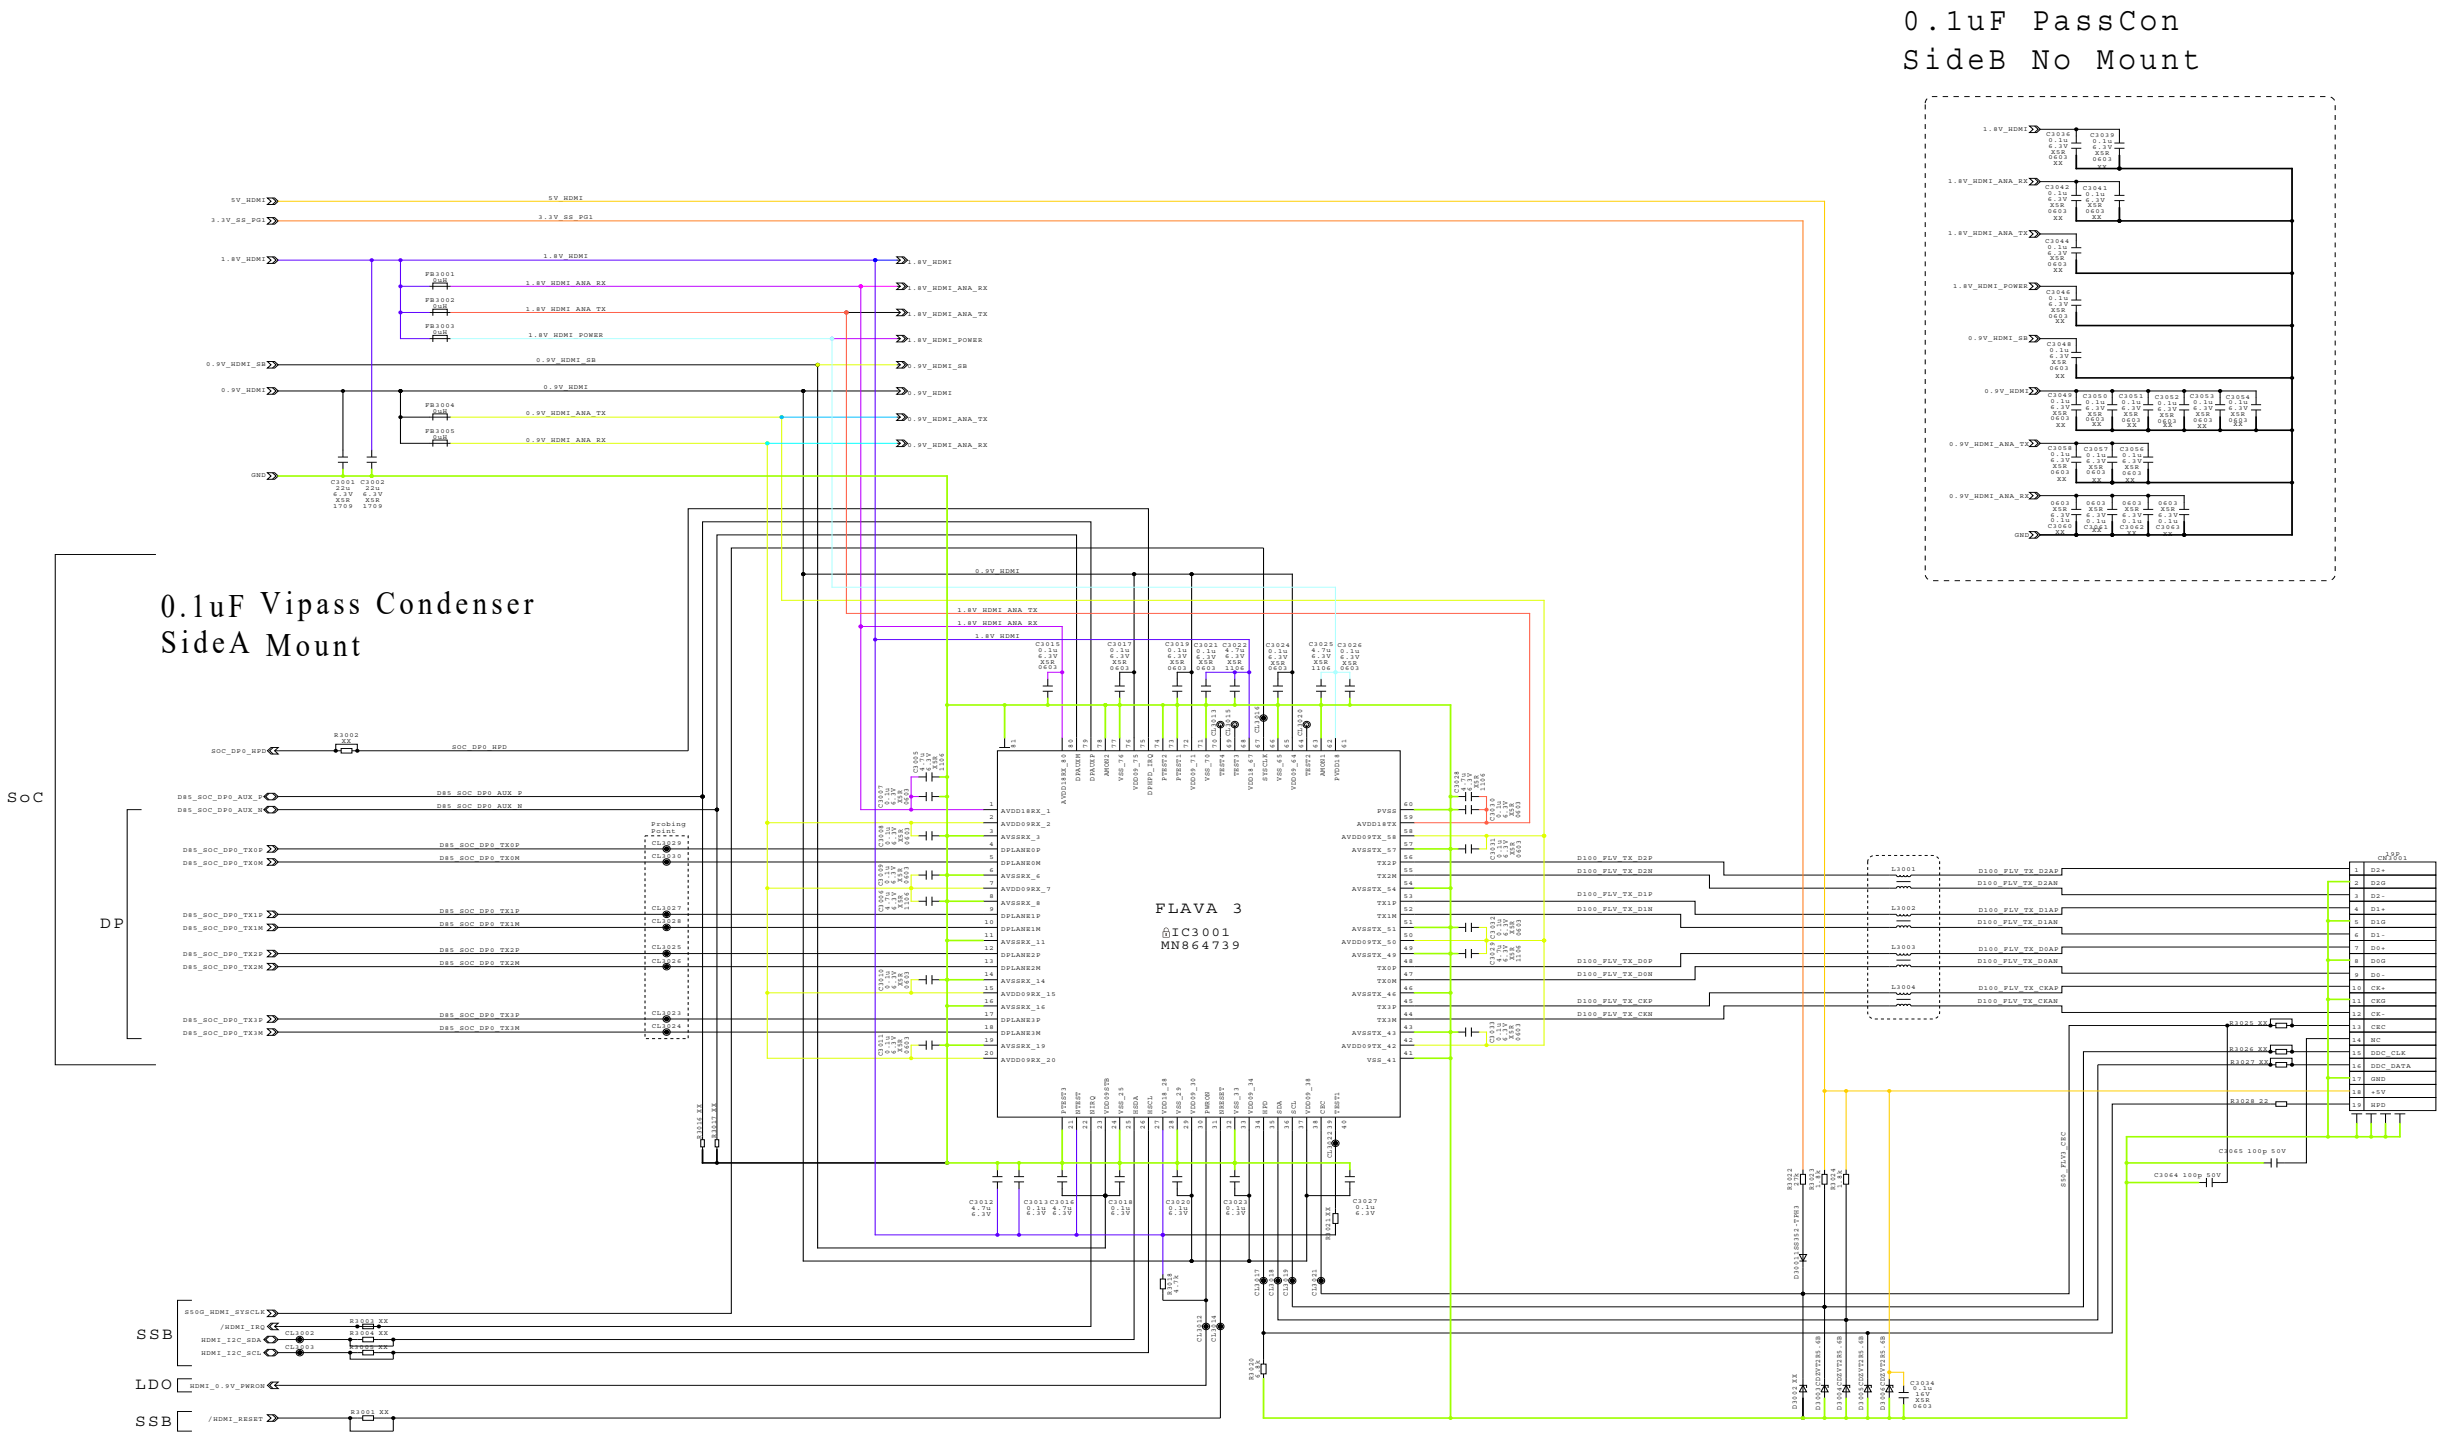


1-8. EDM-010 Board (8/23)





The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


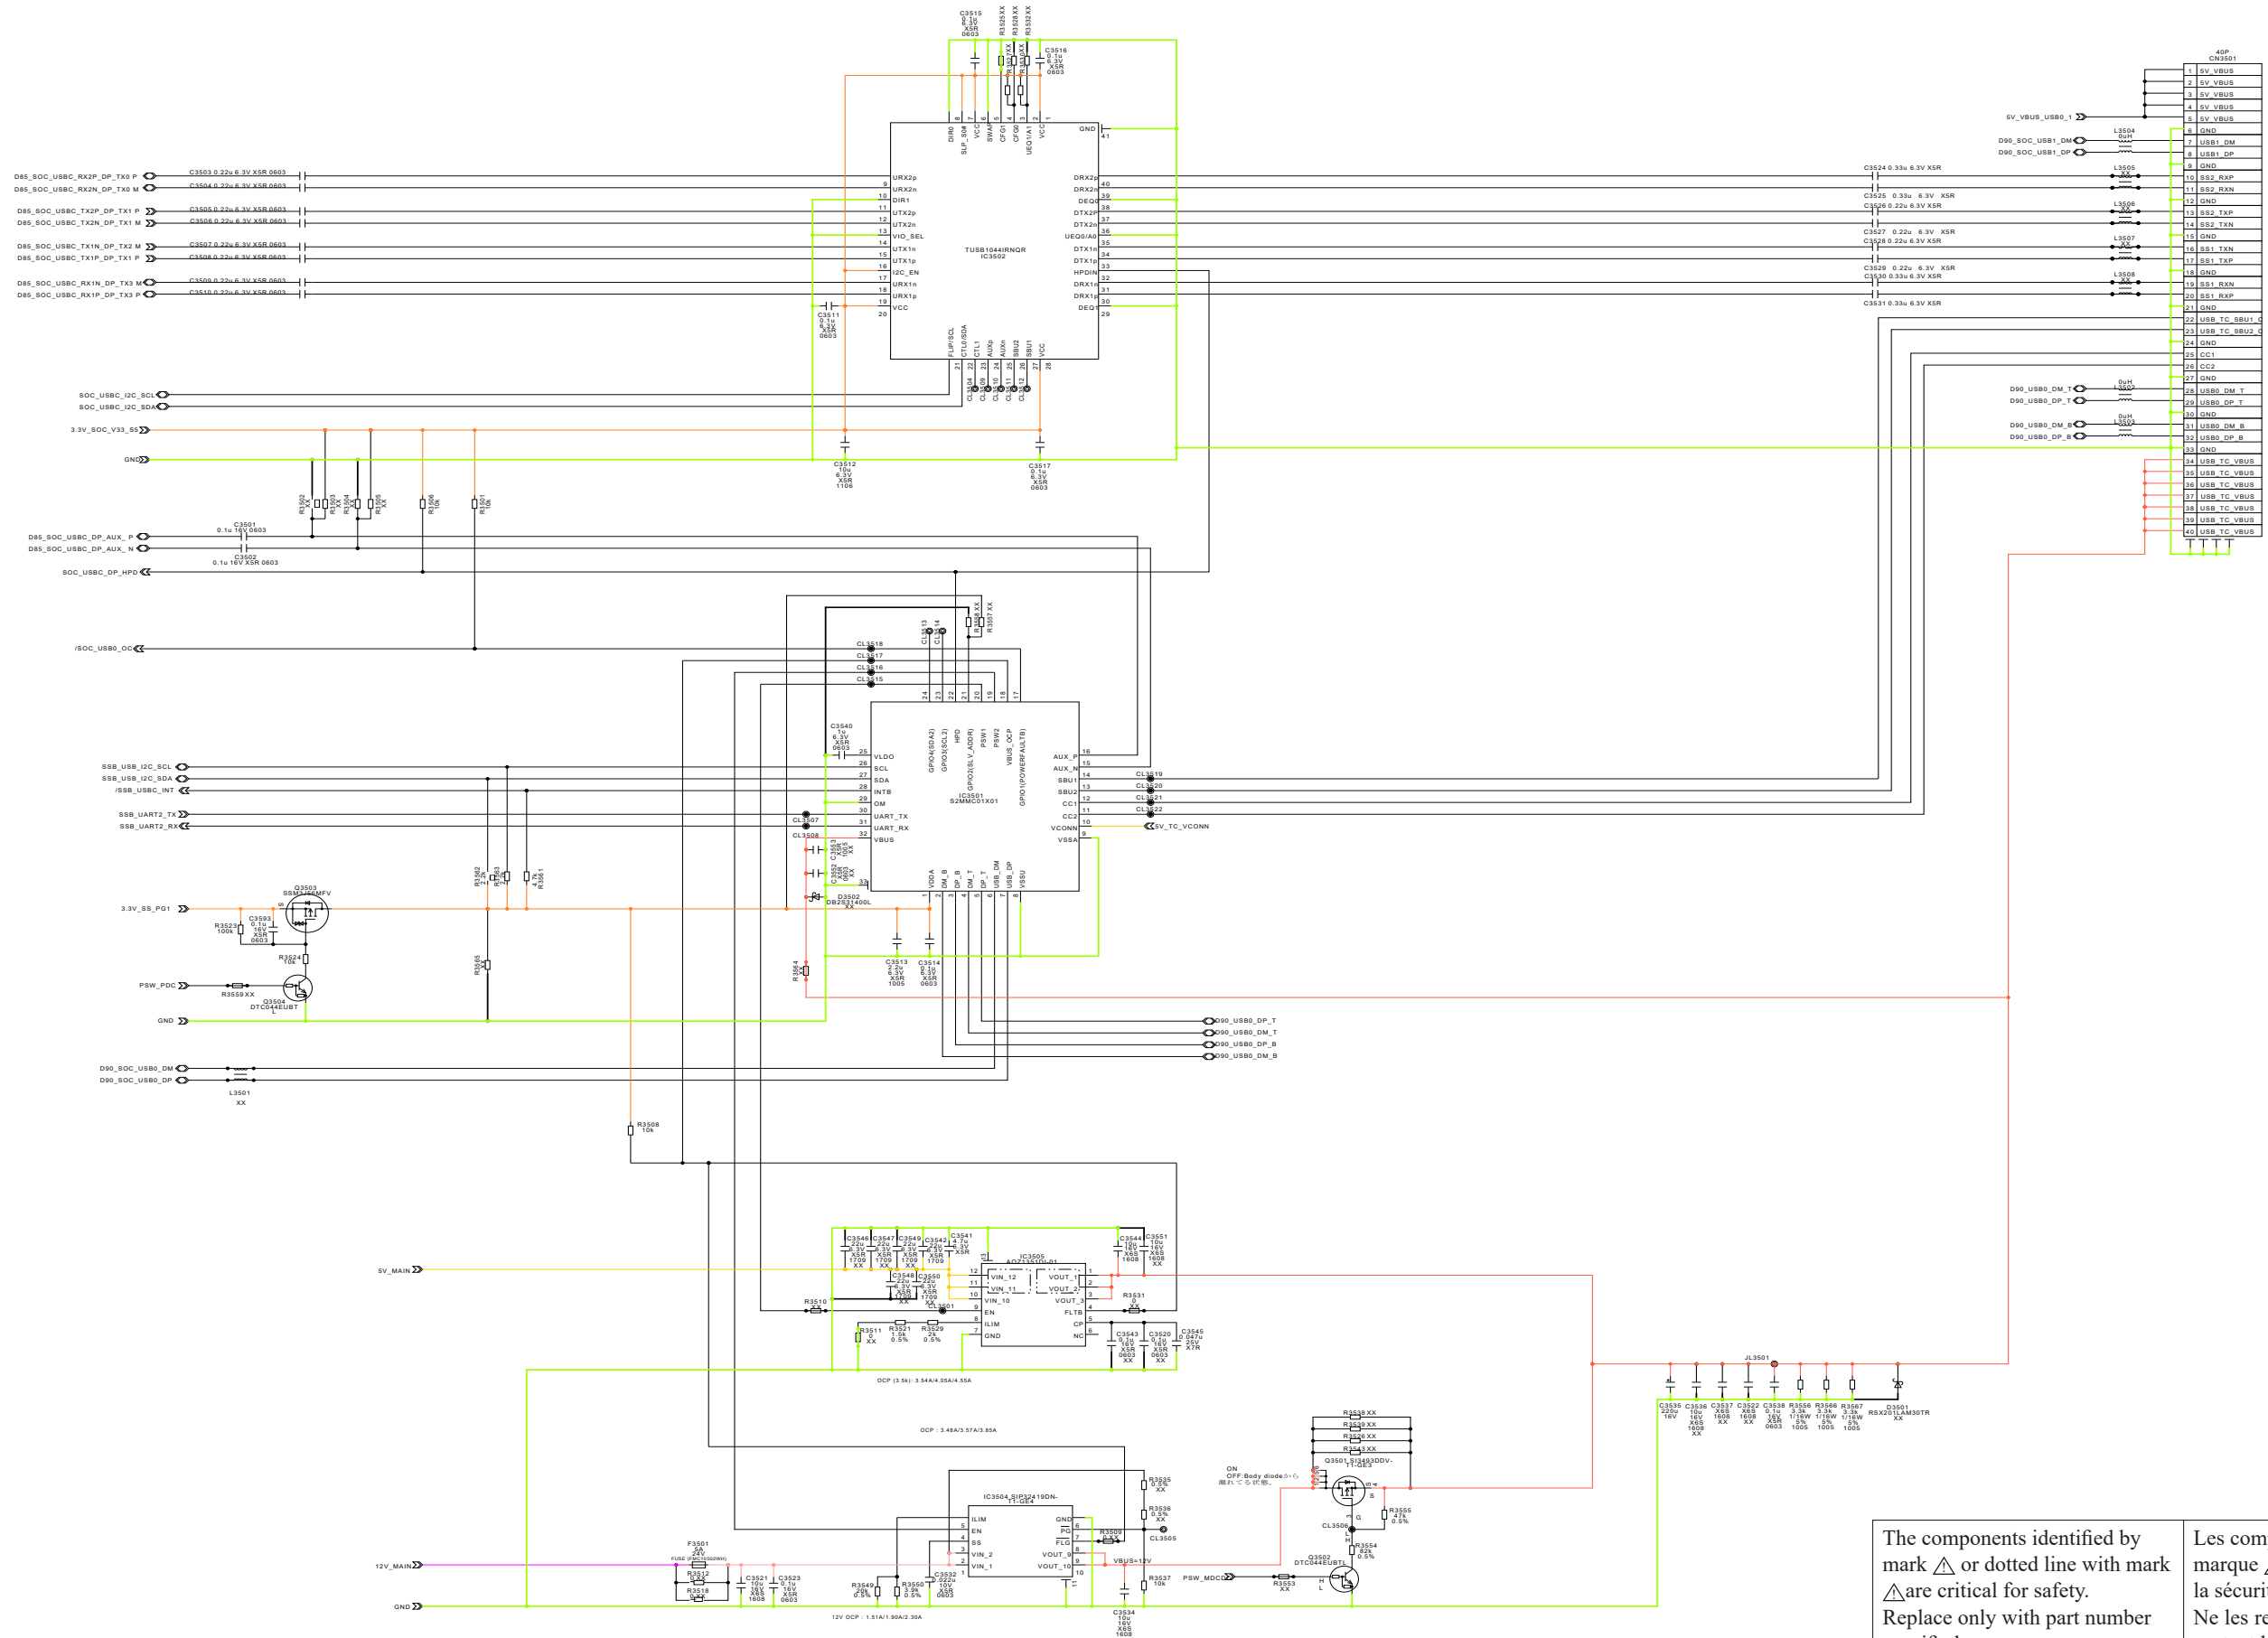
1-9. EDM-010 Board (9/23)




The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque \triangle sont critiques pour la sécurité.
Ne les remplacer que par une pièce portant le numéro spécifié.


1-10. EDM-010 Board (10/23)

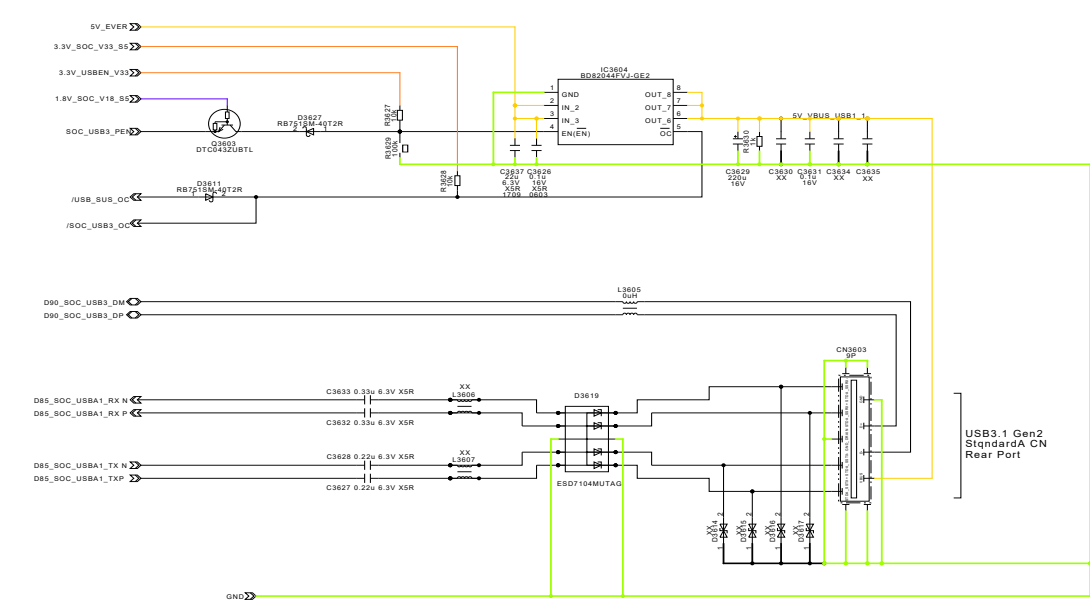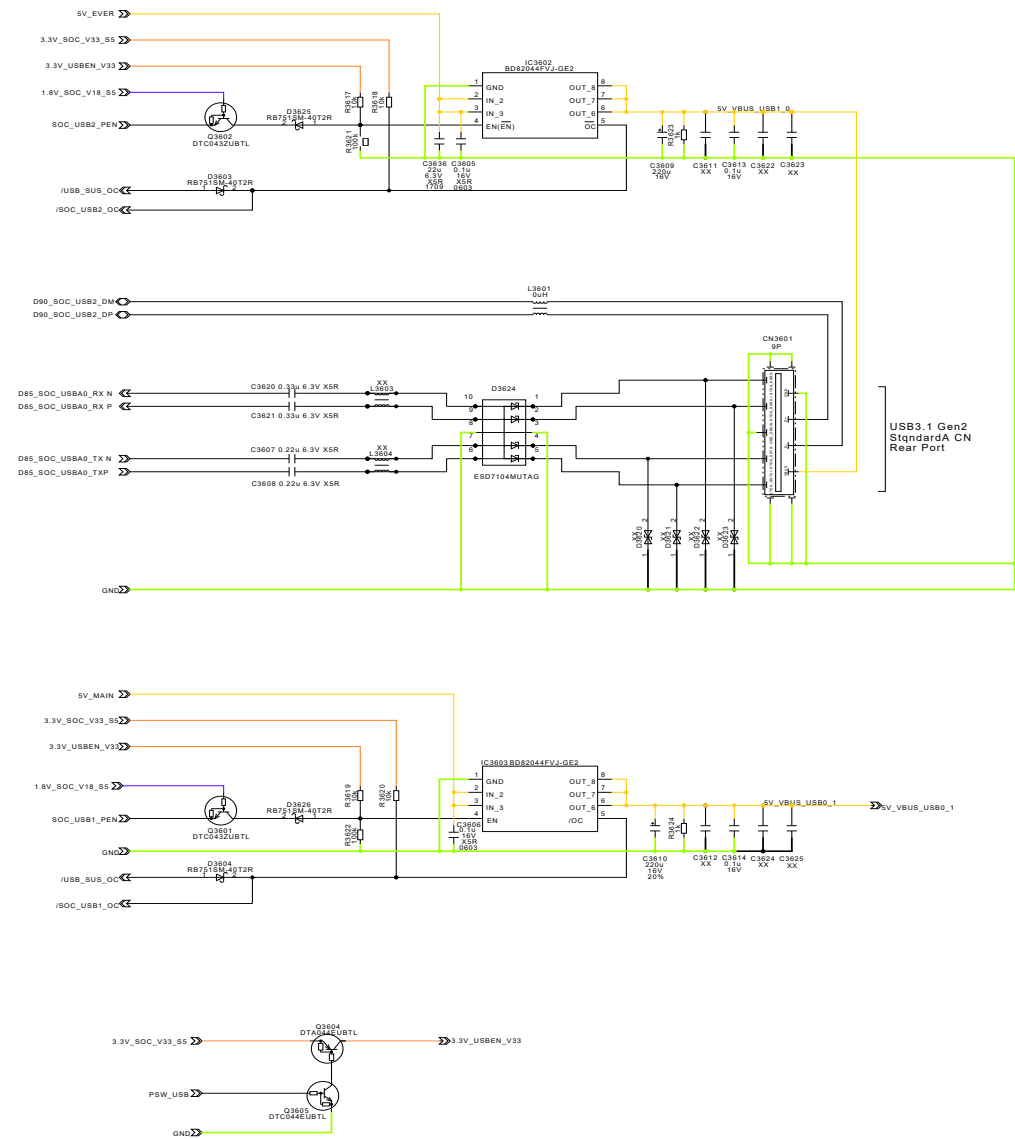


1-12. EDM-010 Board (12/23)

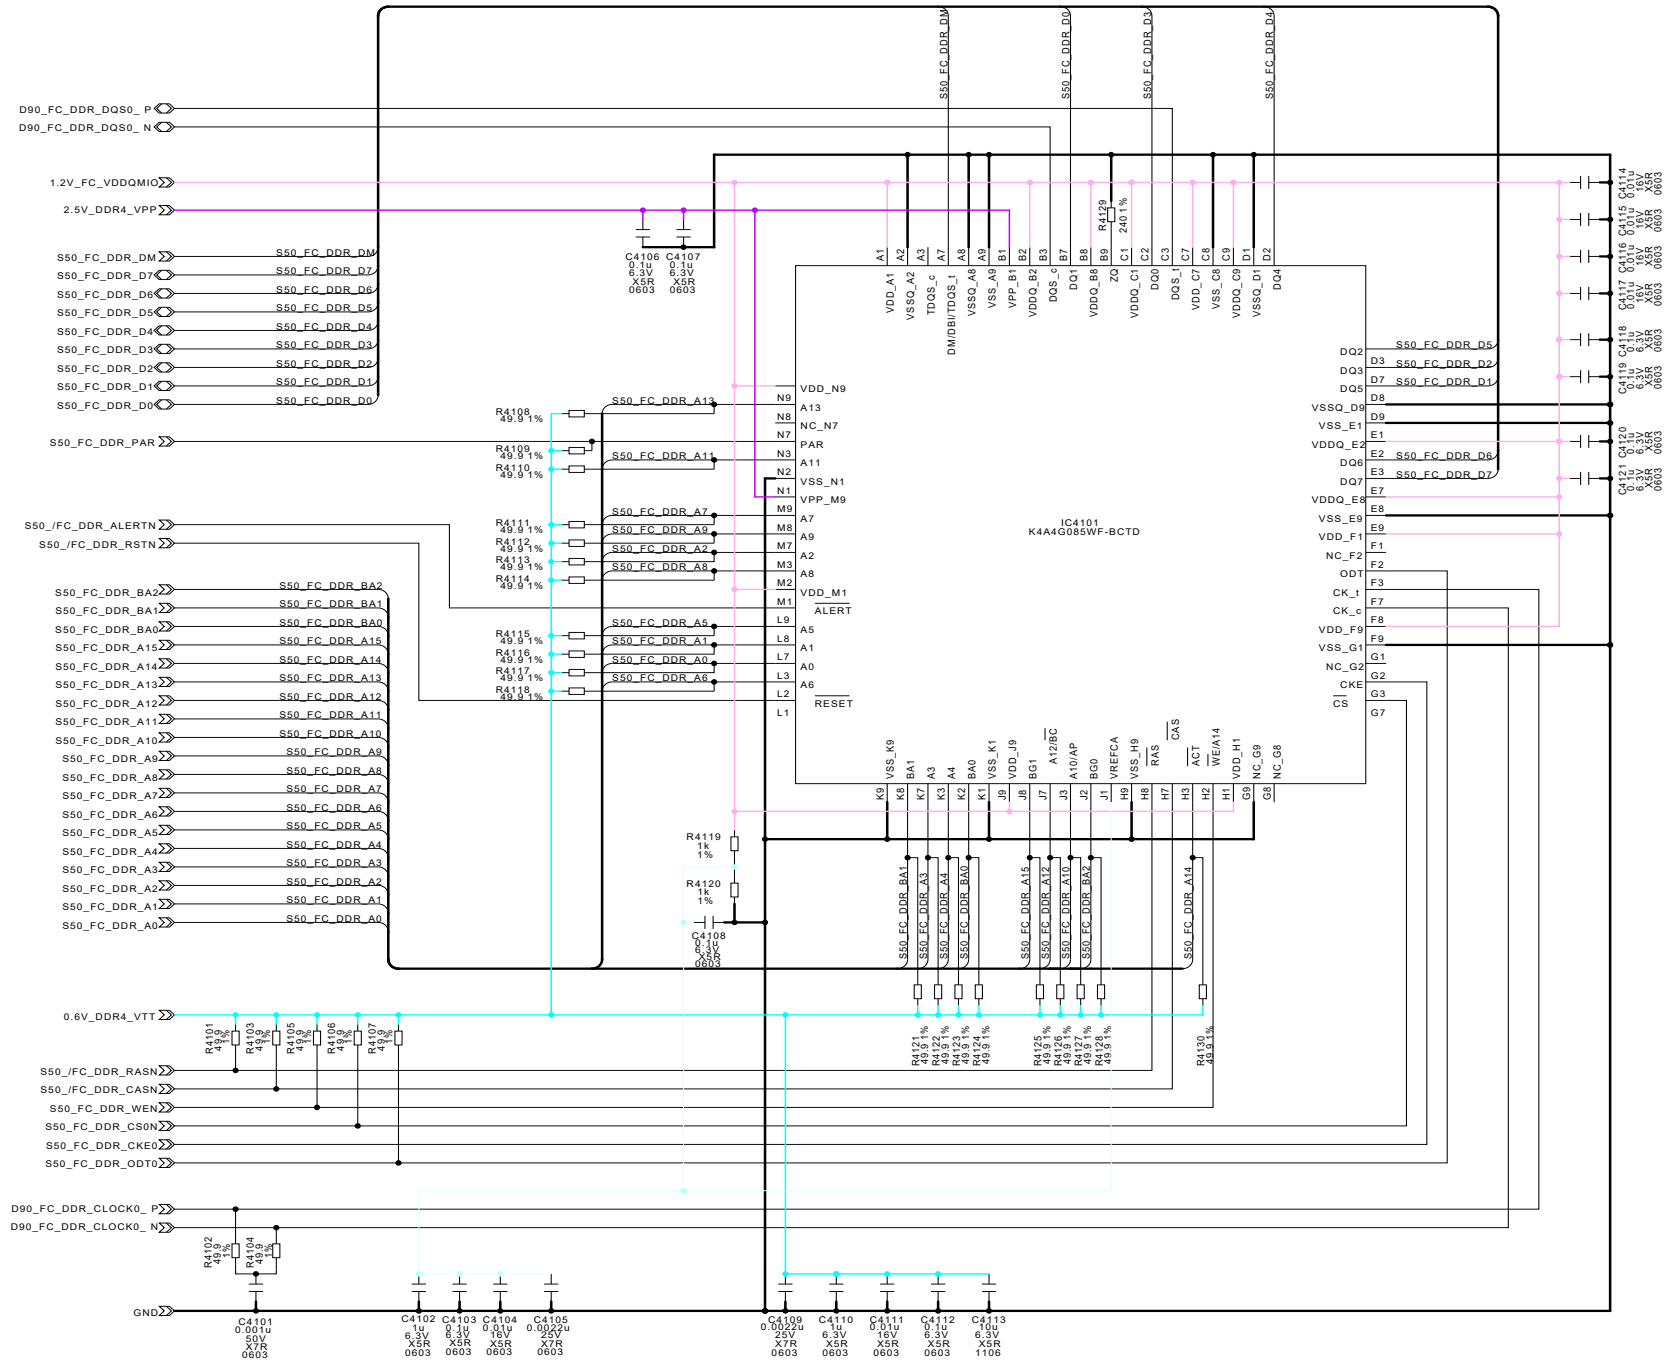


1-13. EDM-010 Board (13/23)

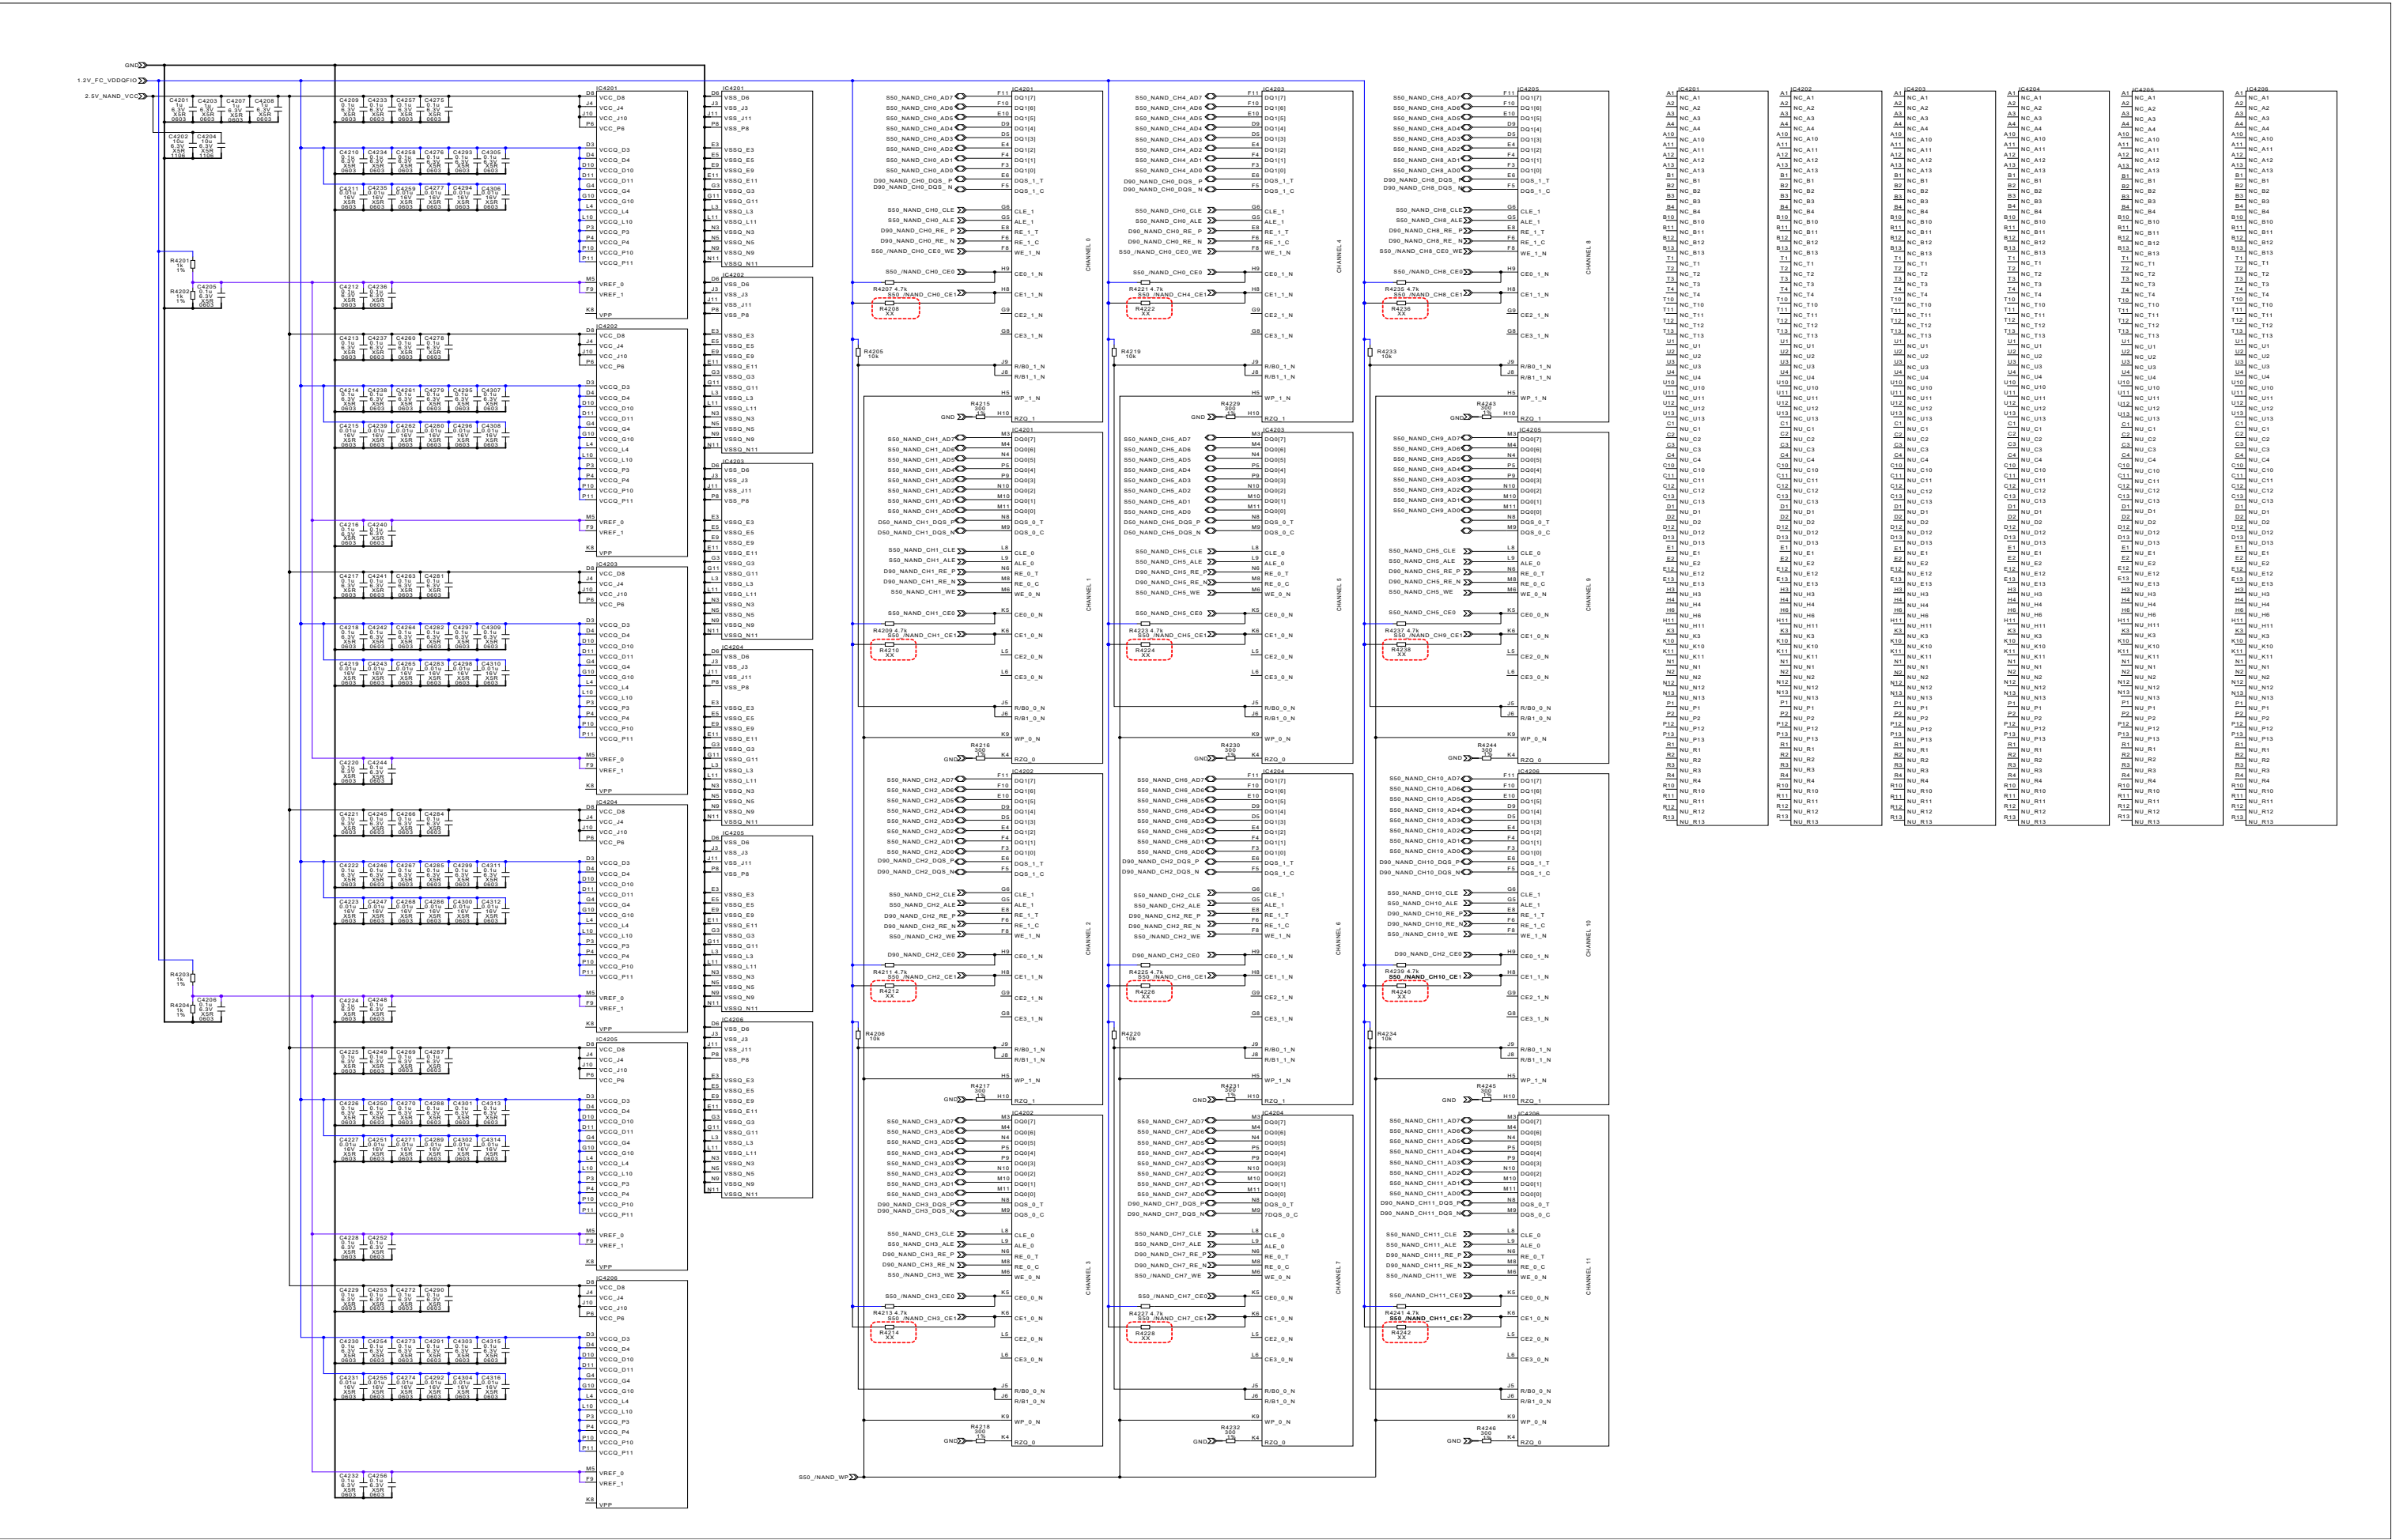


1-14. EDM-010 Board (14/23)

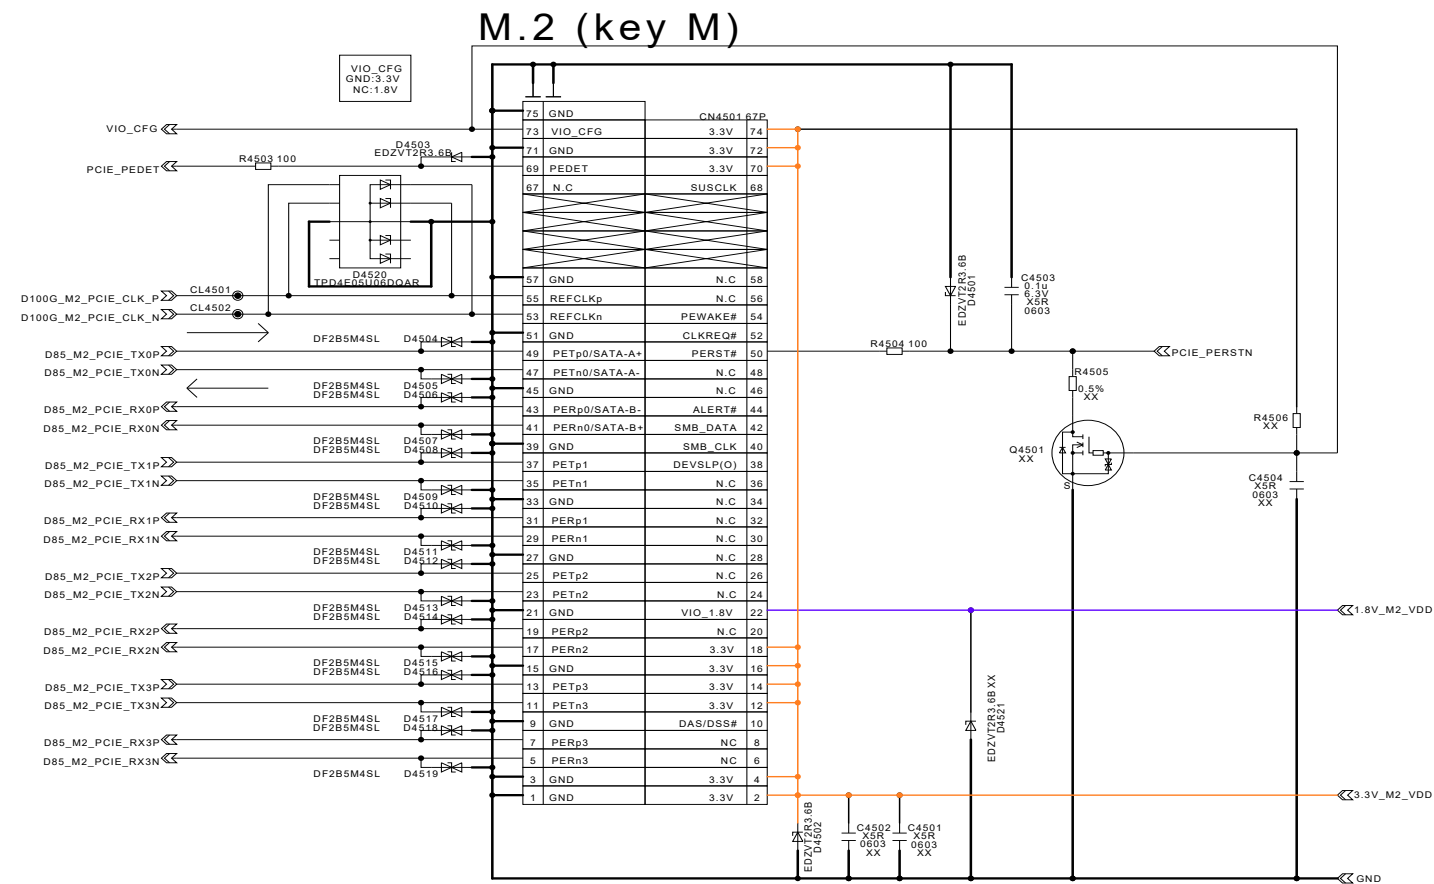


1-16. EDM-010 Board (15/23)

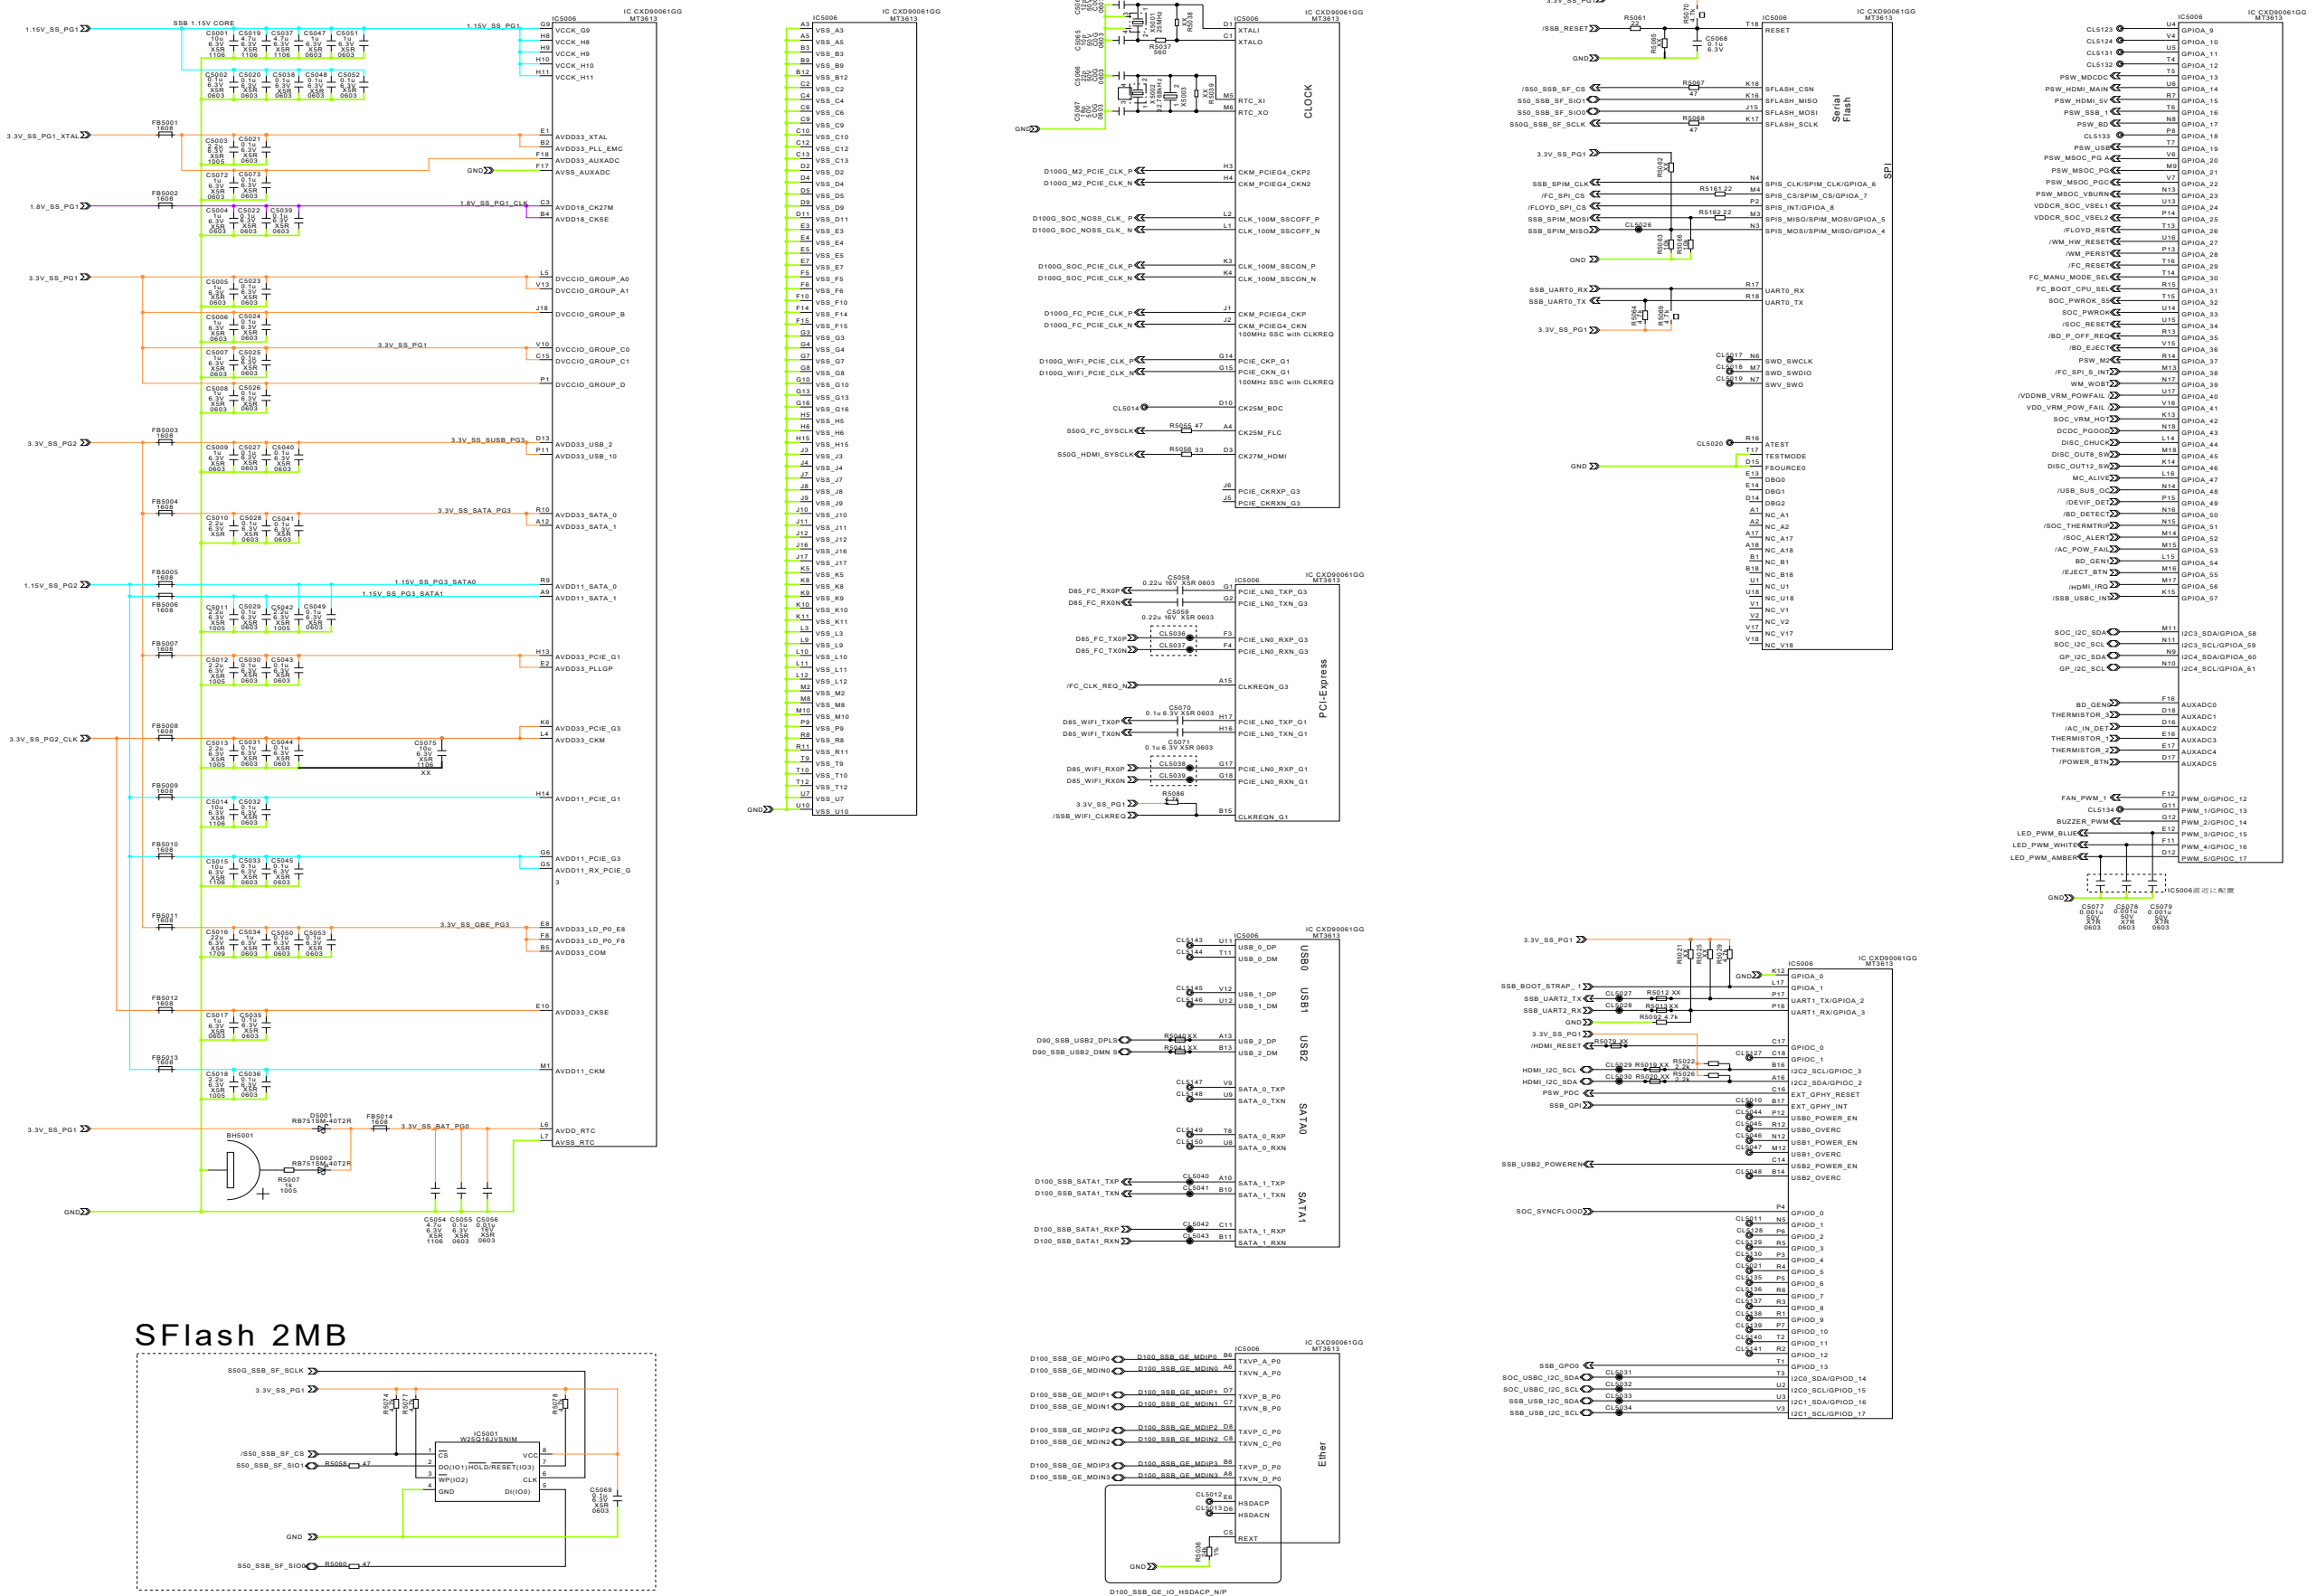



1-17. EDM-010 Board (17/23)

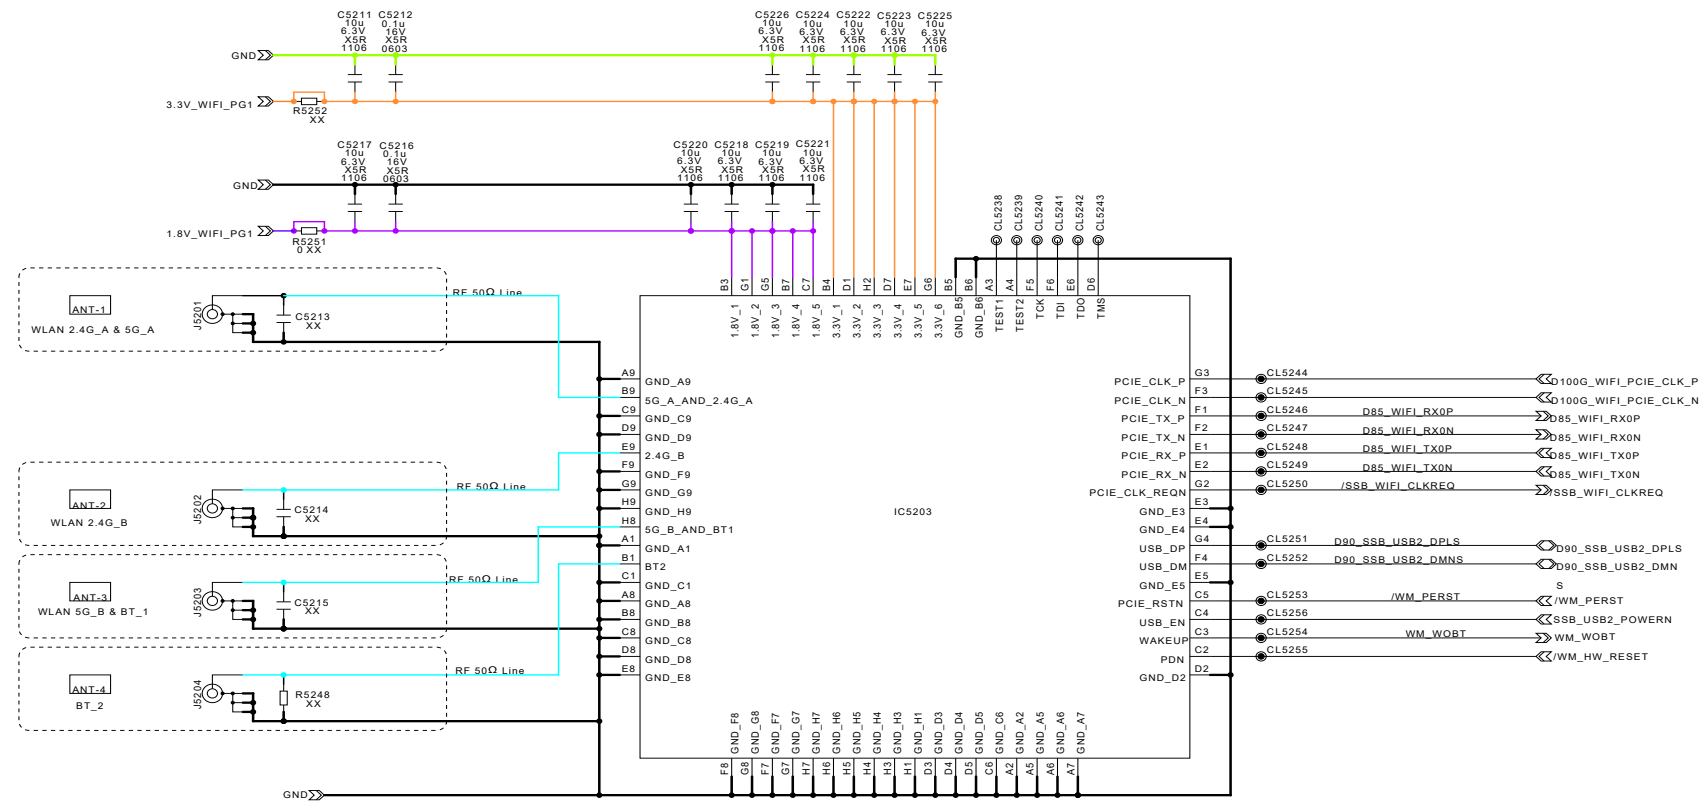

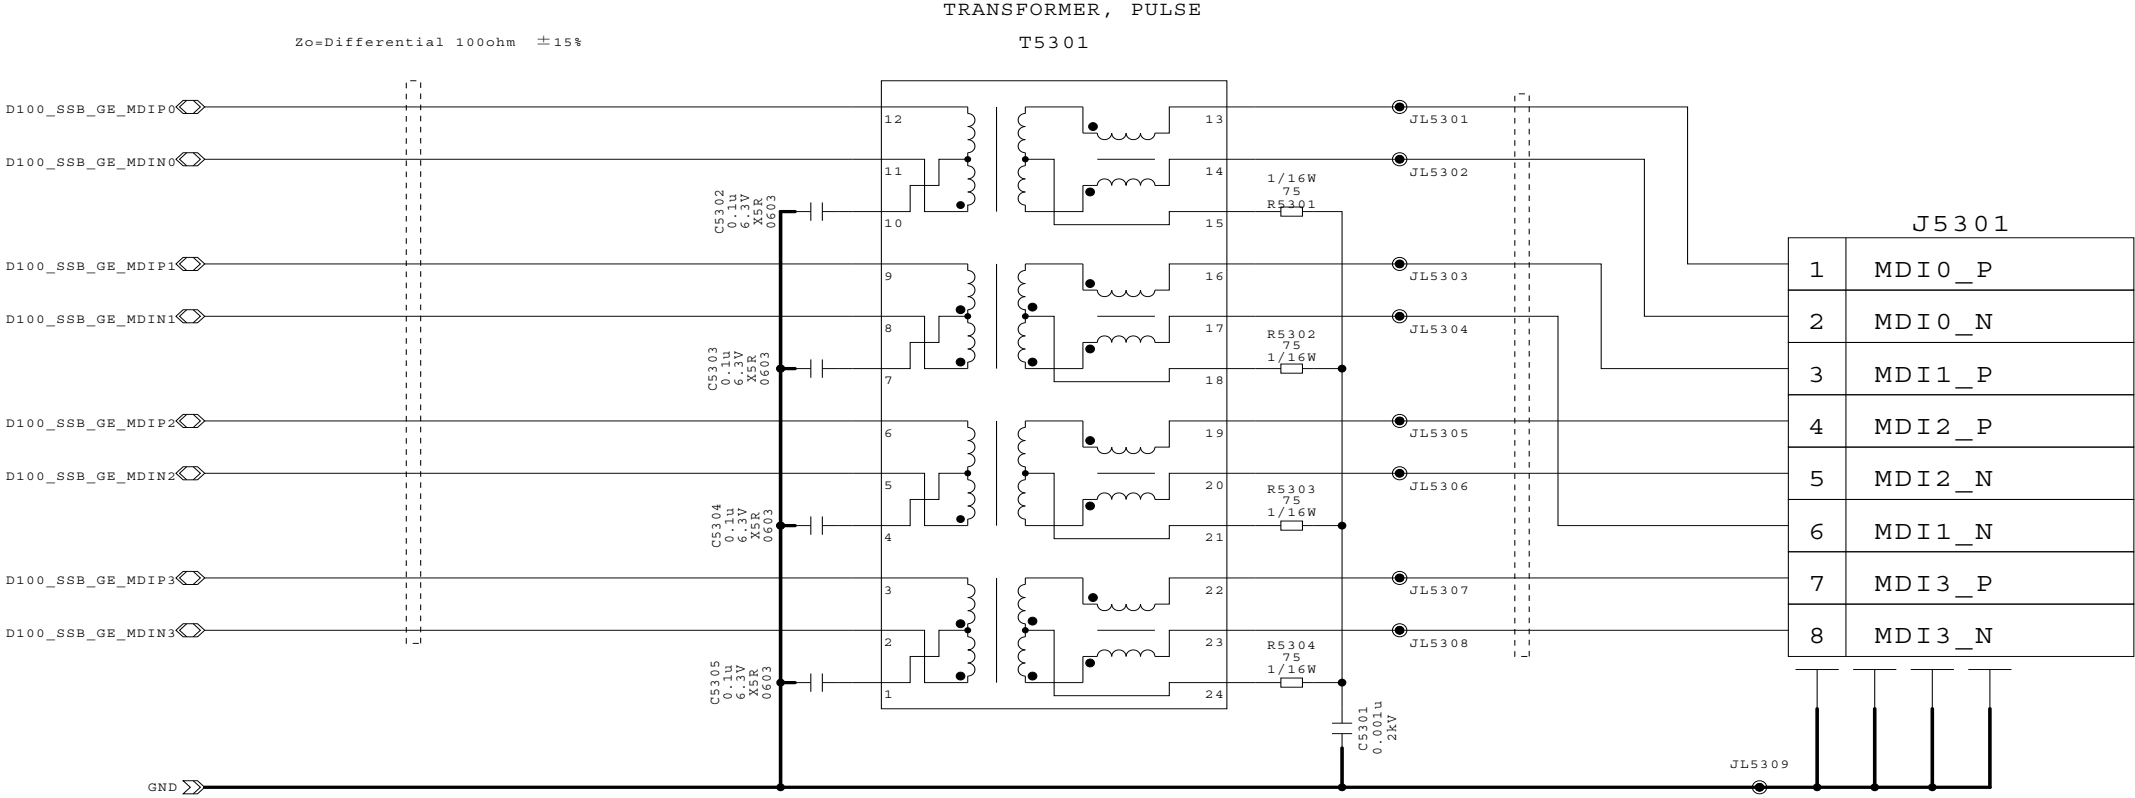


1-18. EDM-010 Board (18/23)

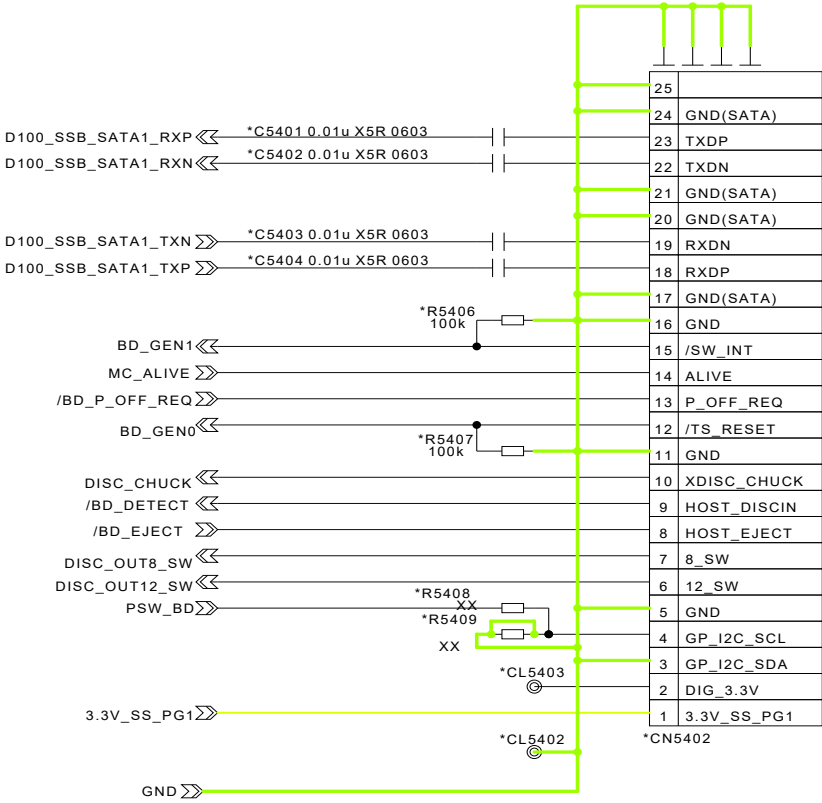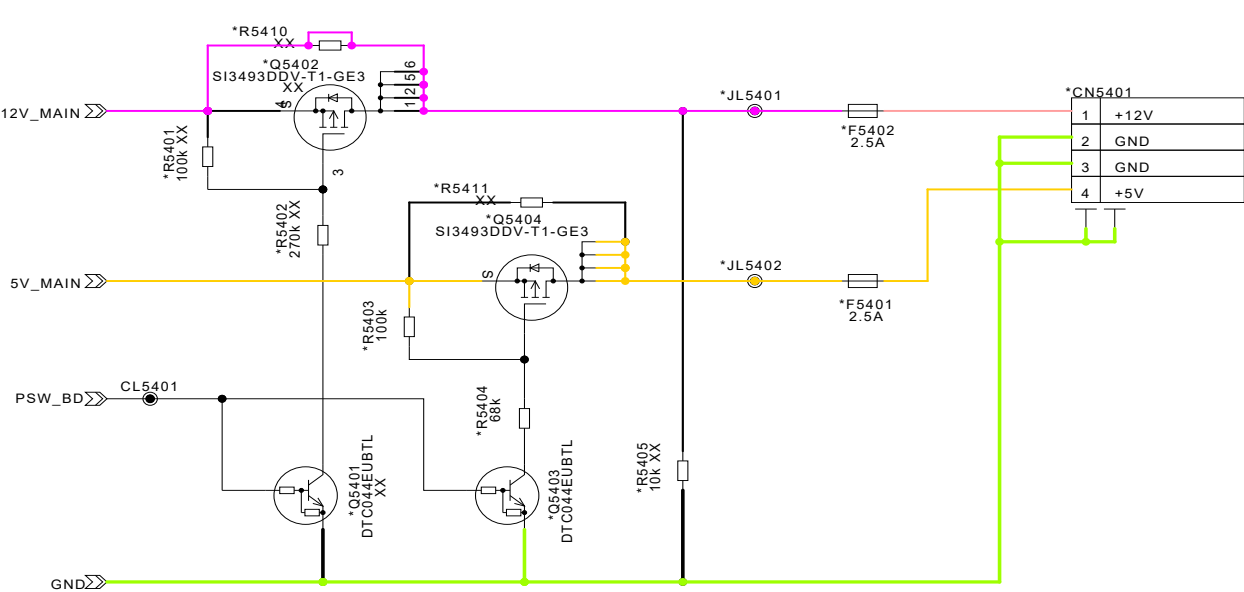


1-19. EDM-010 Board (19/23)




The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.


1-20. EDM-010 Board (20/23)

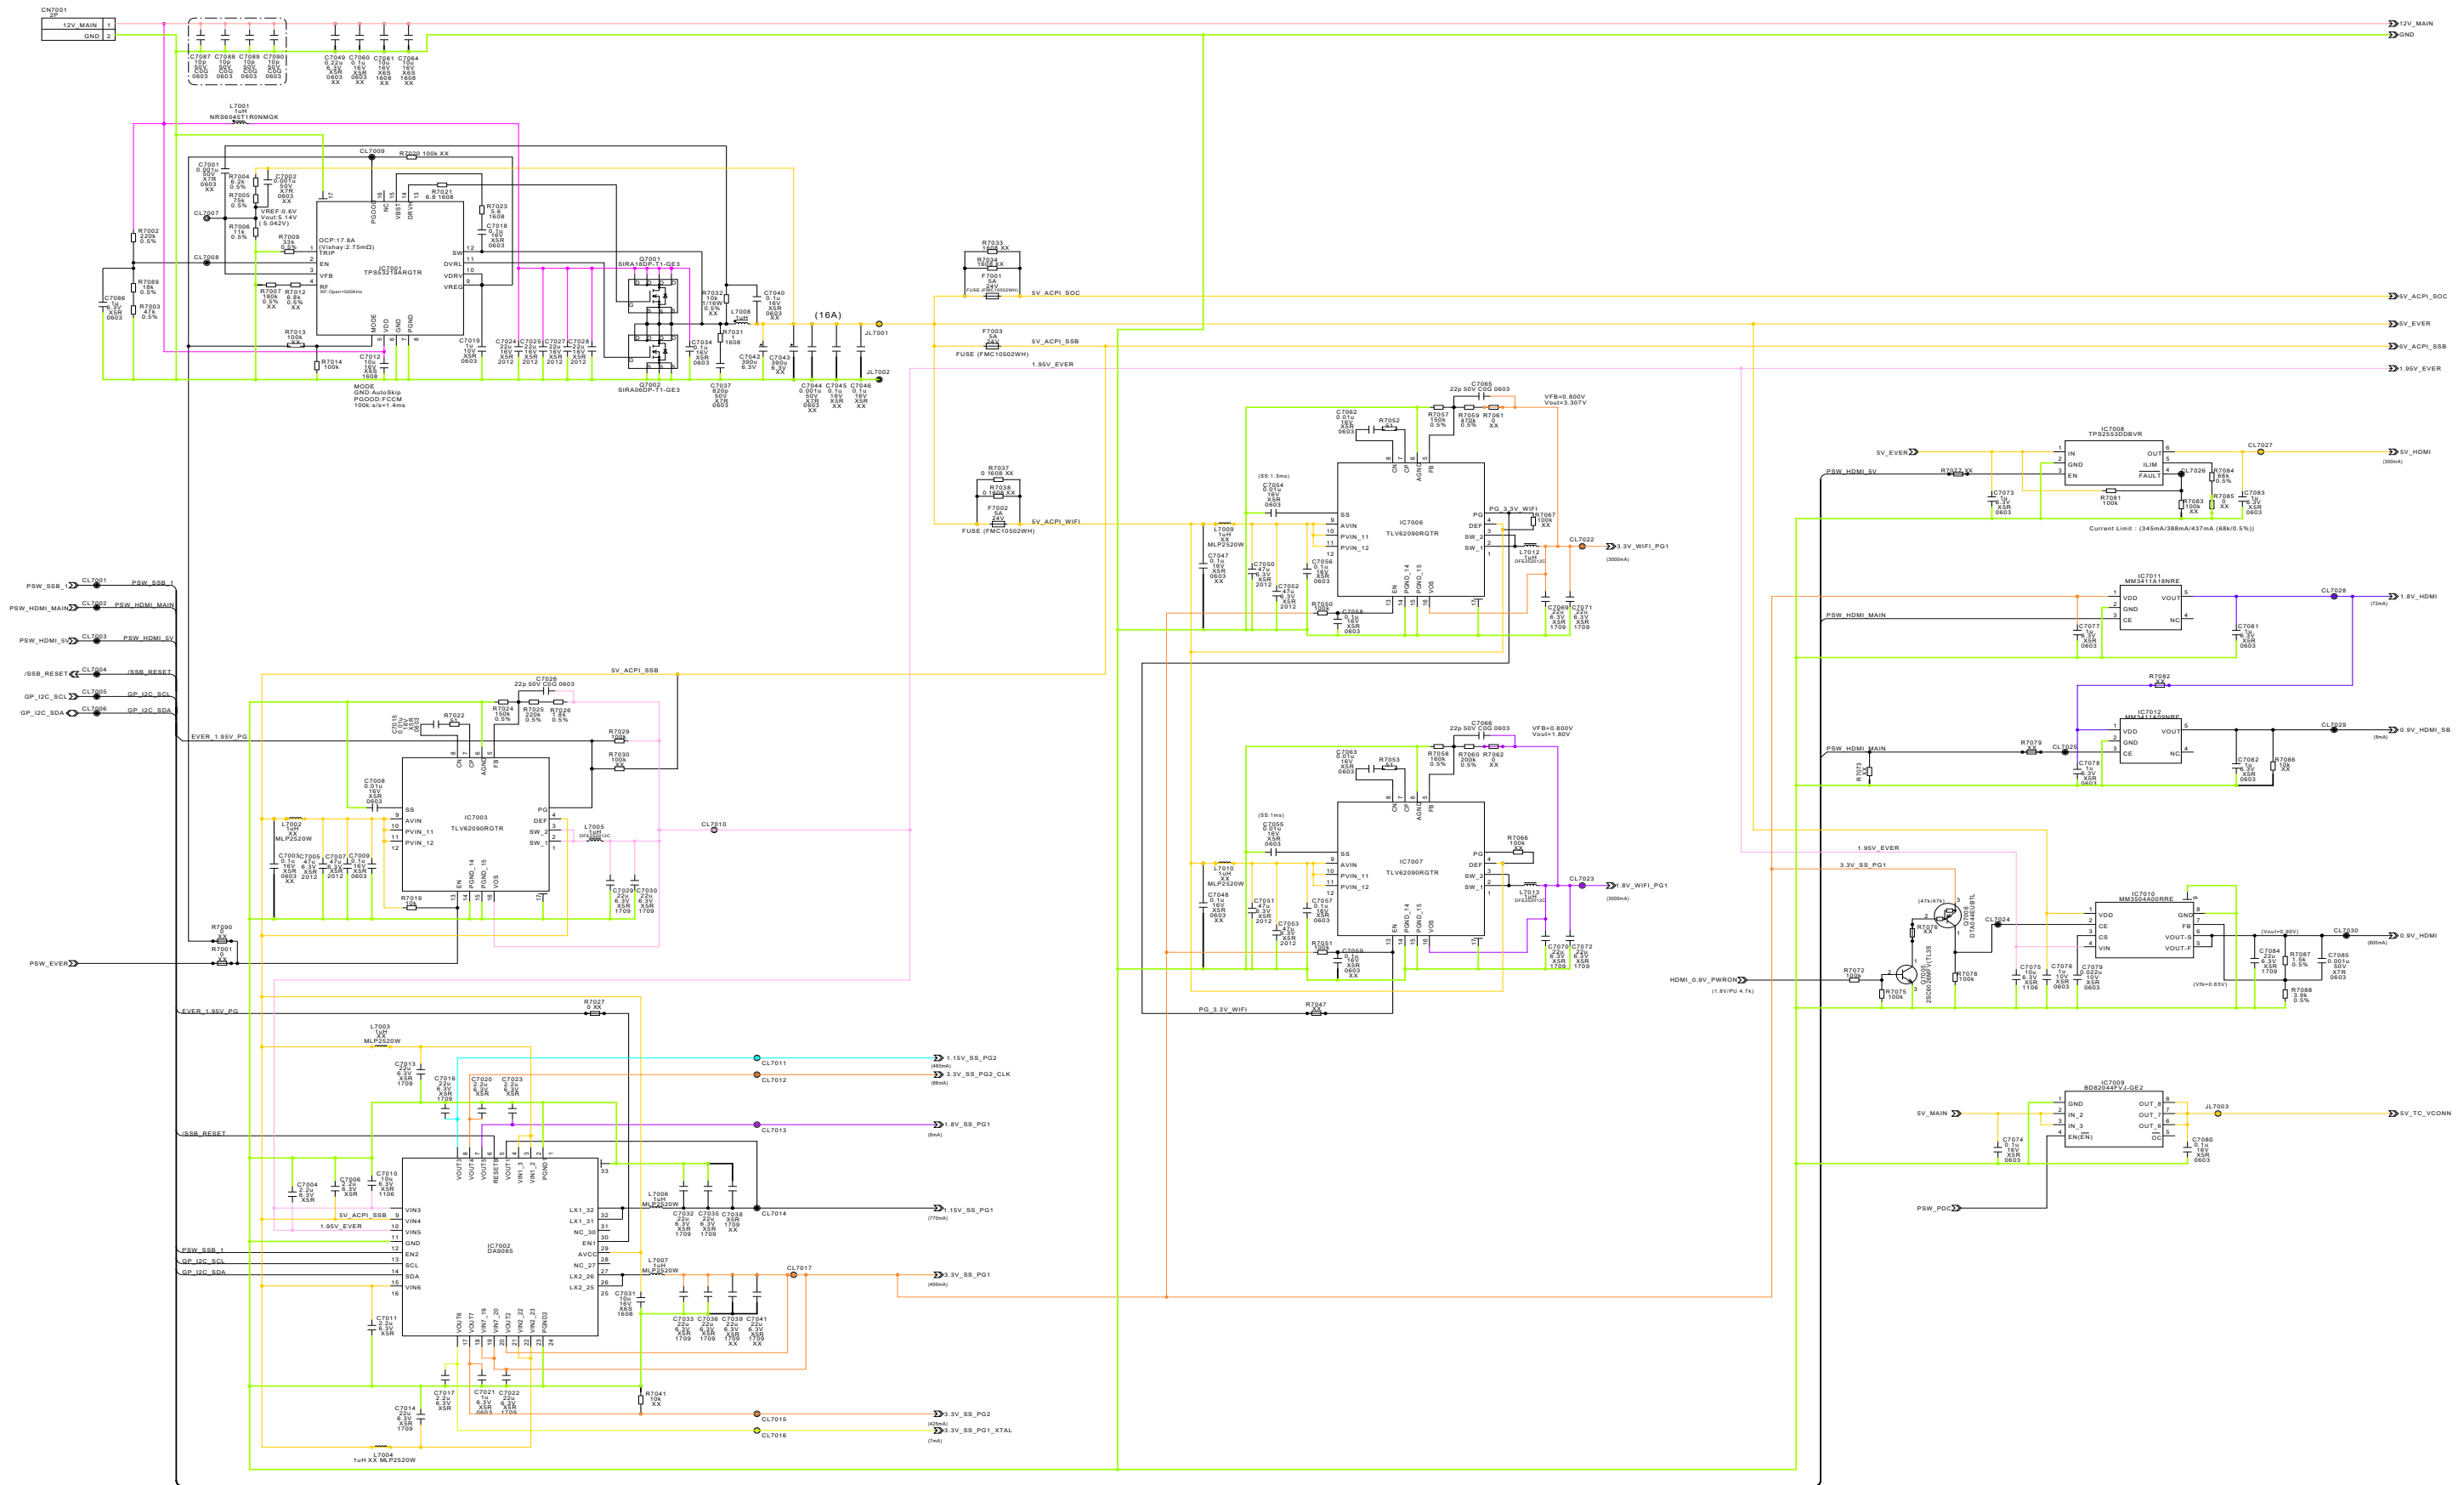

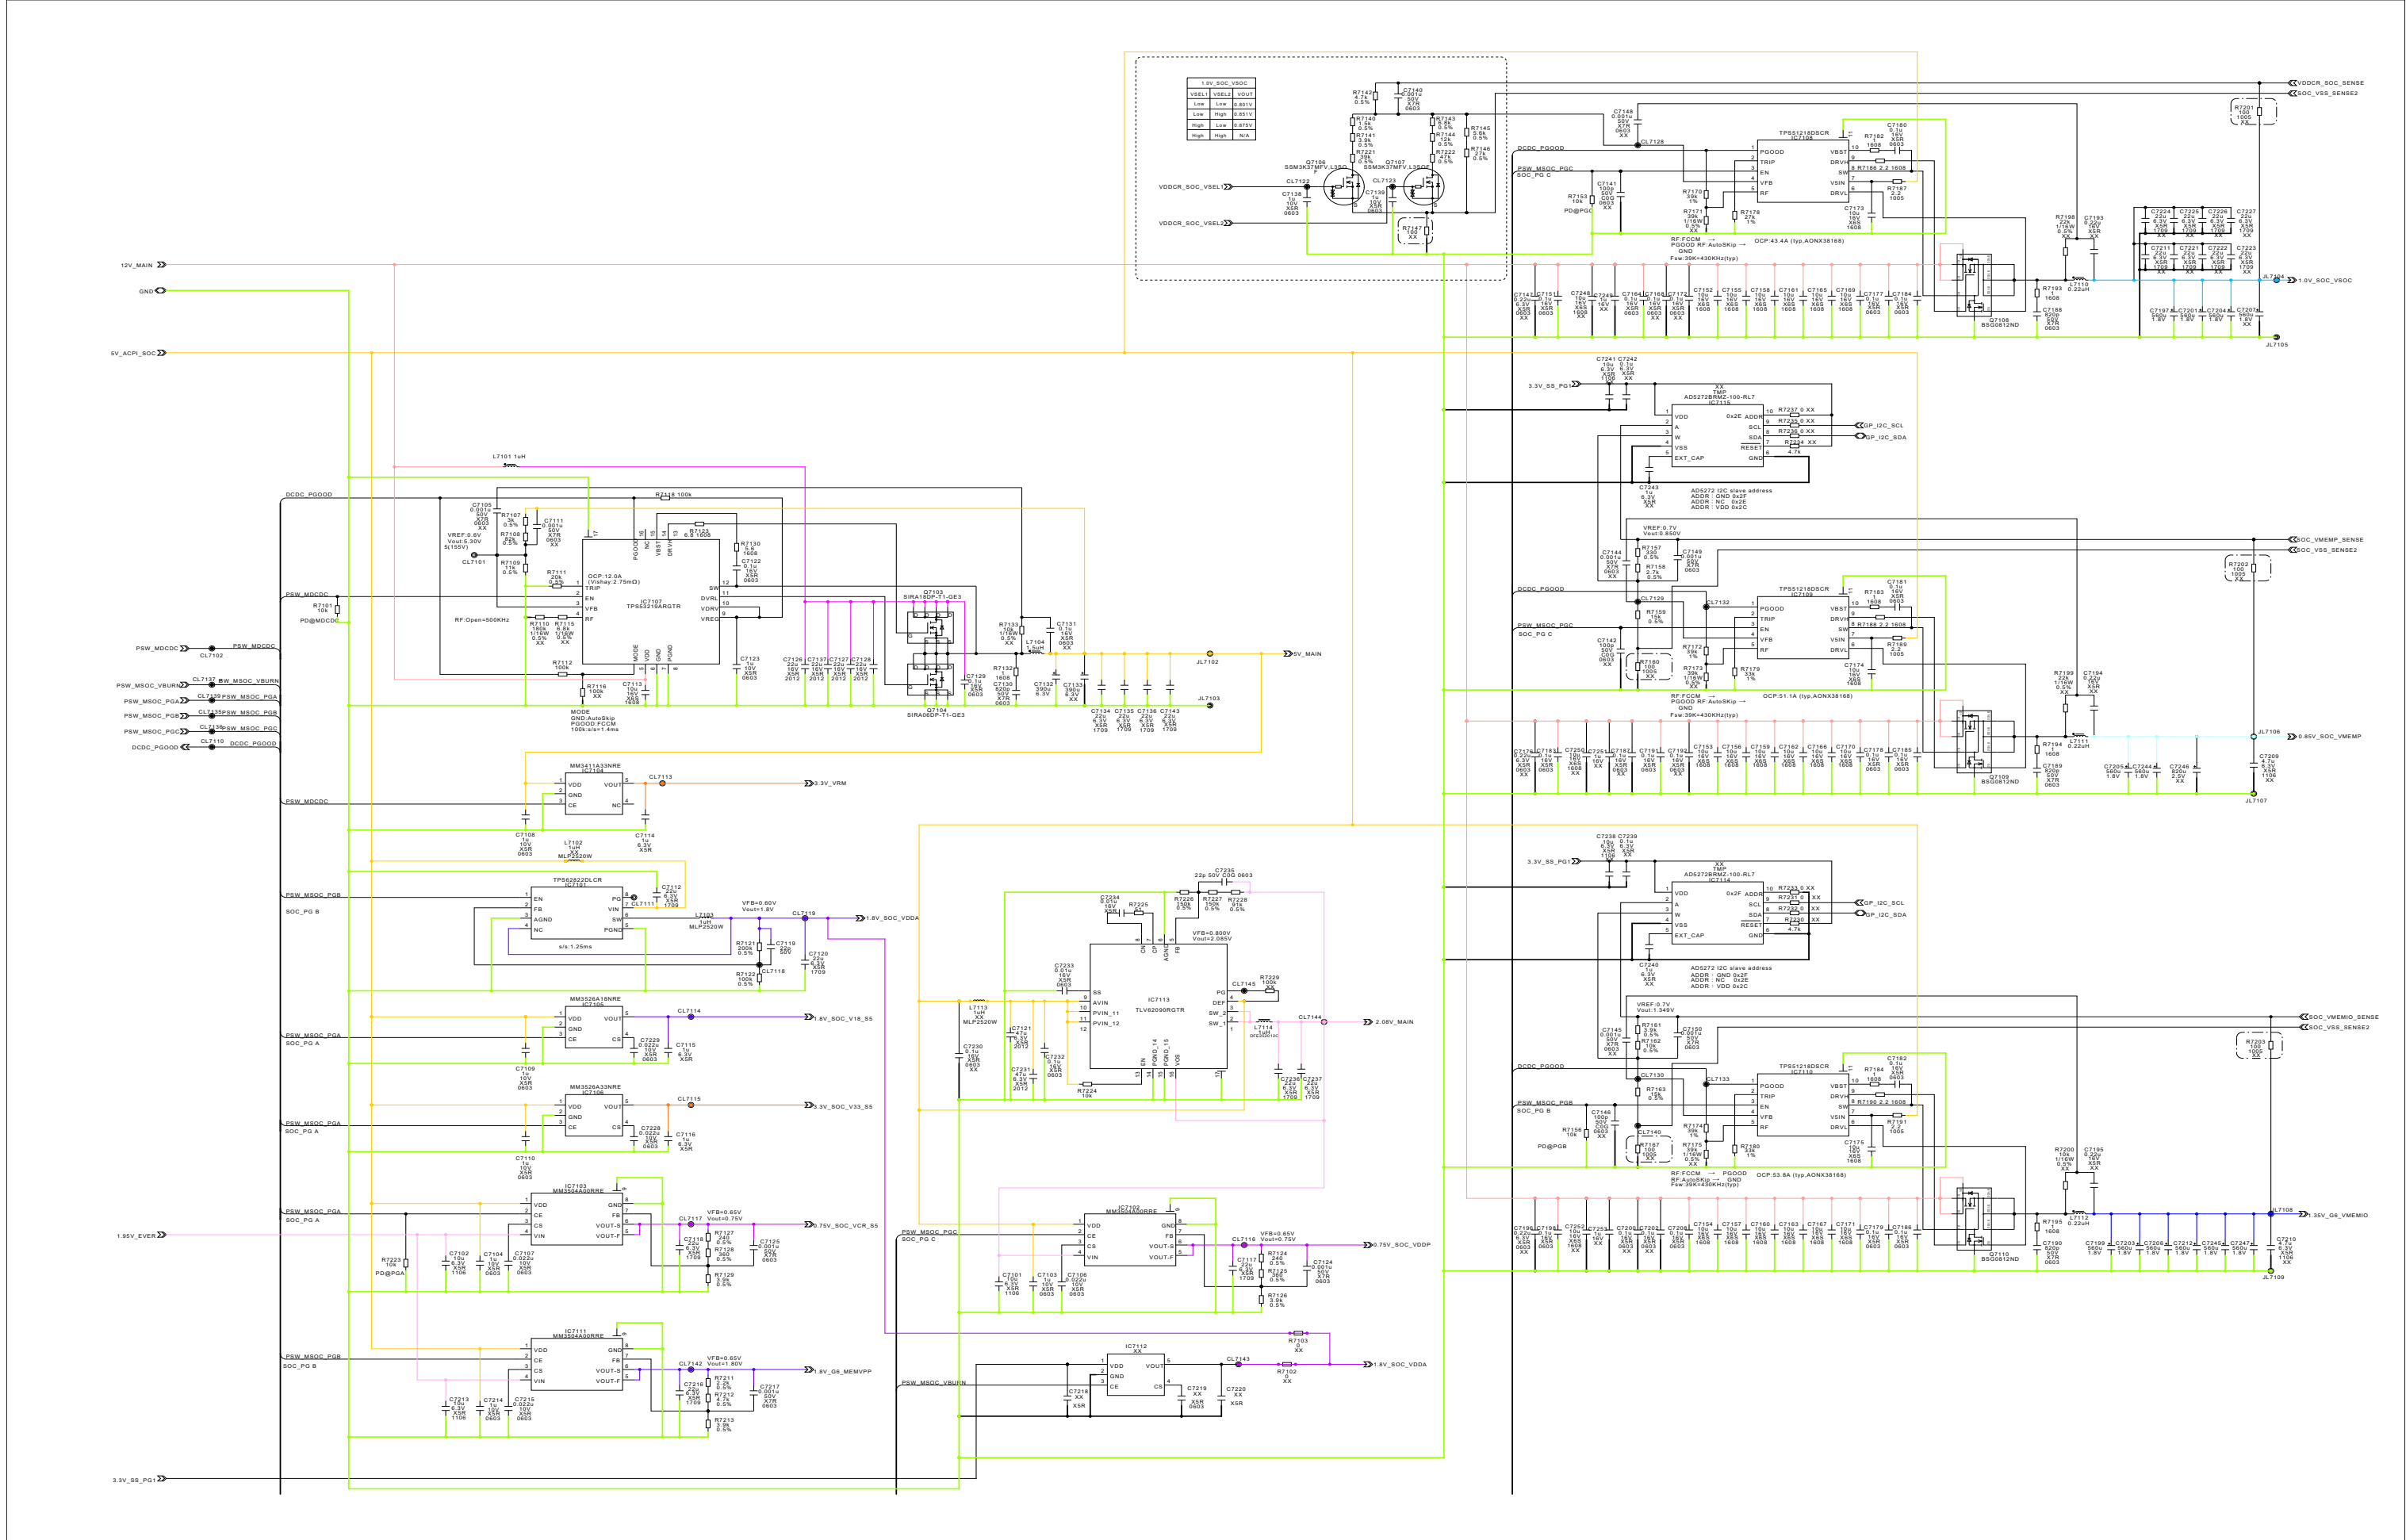


1-21. EDM-010 Board (21/23)




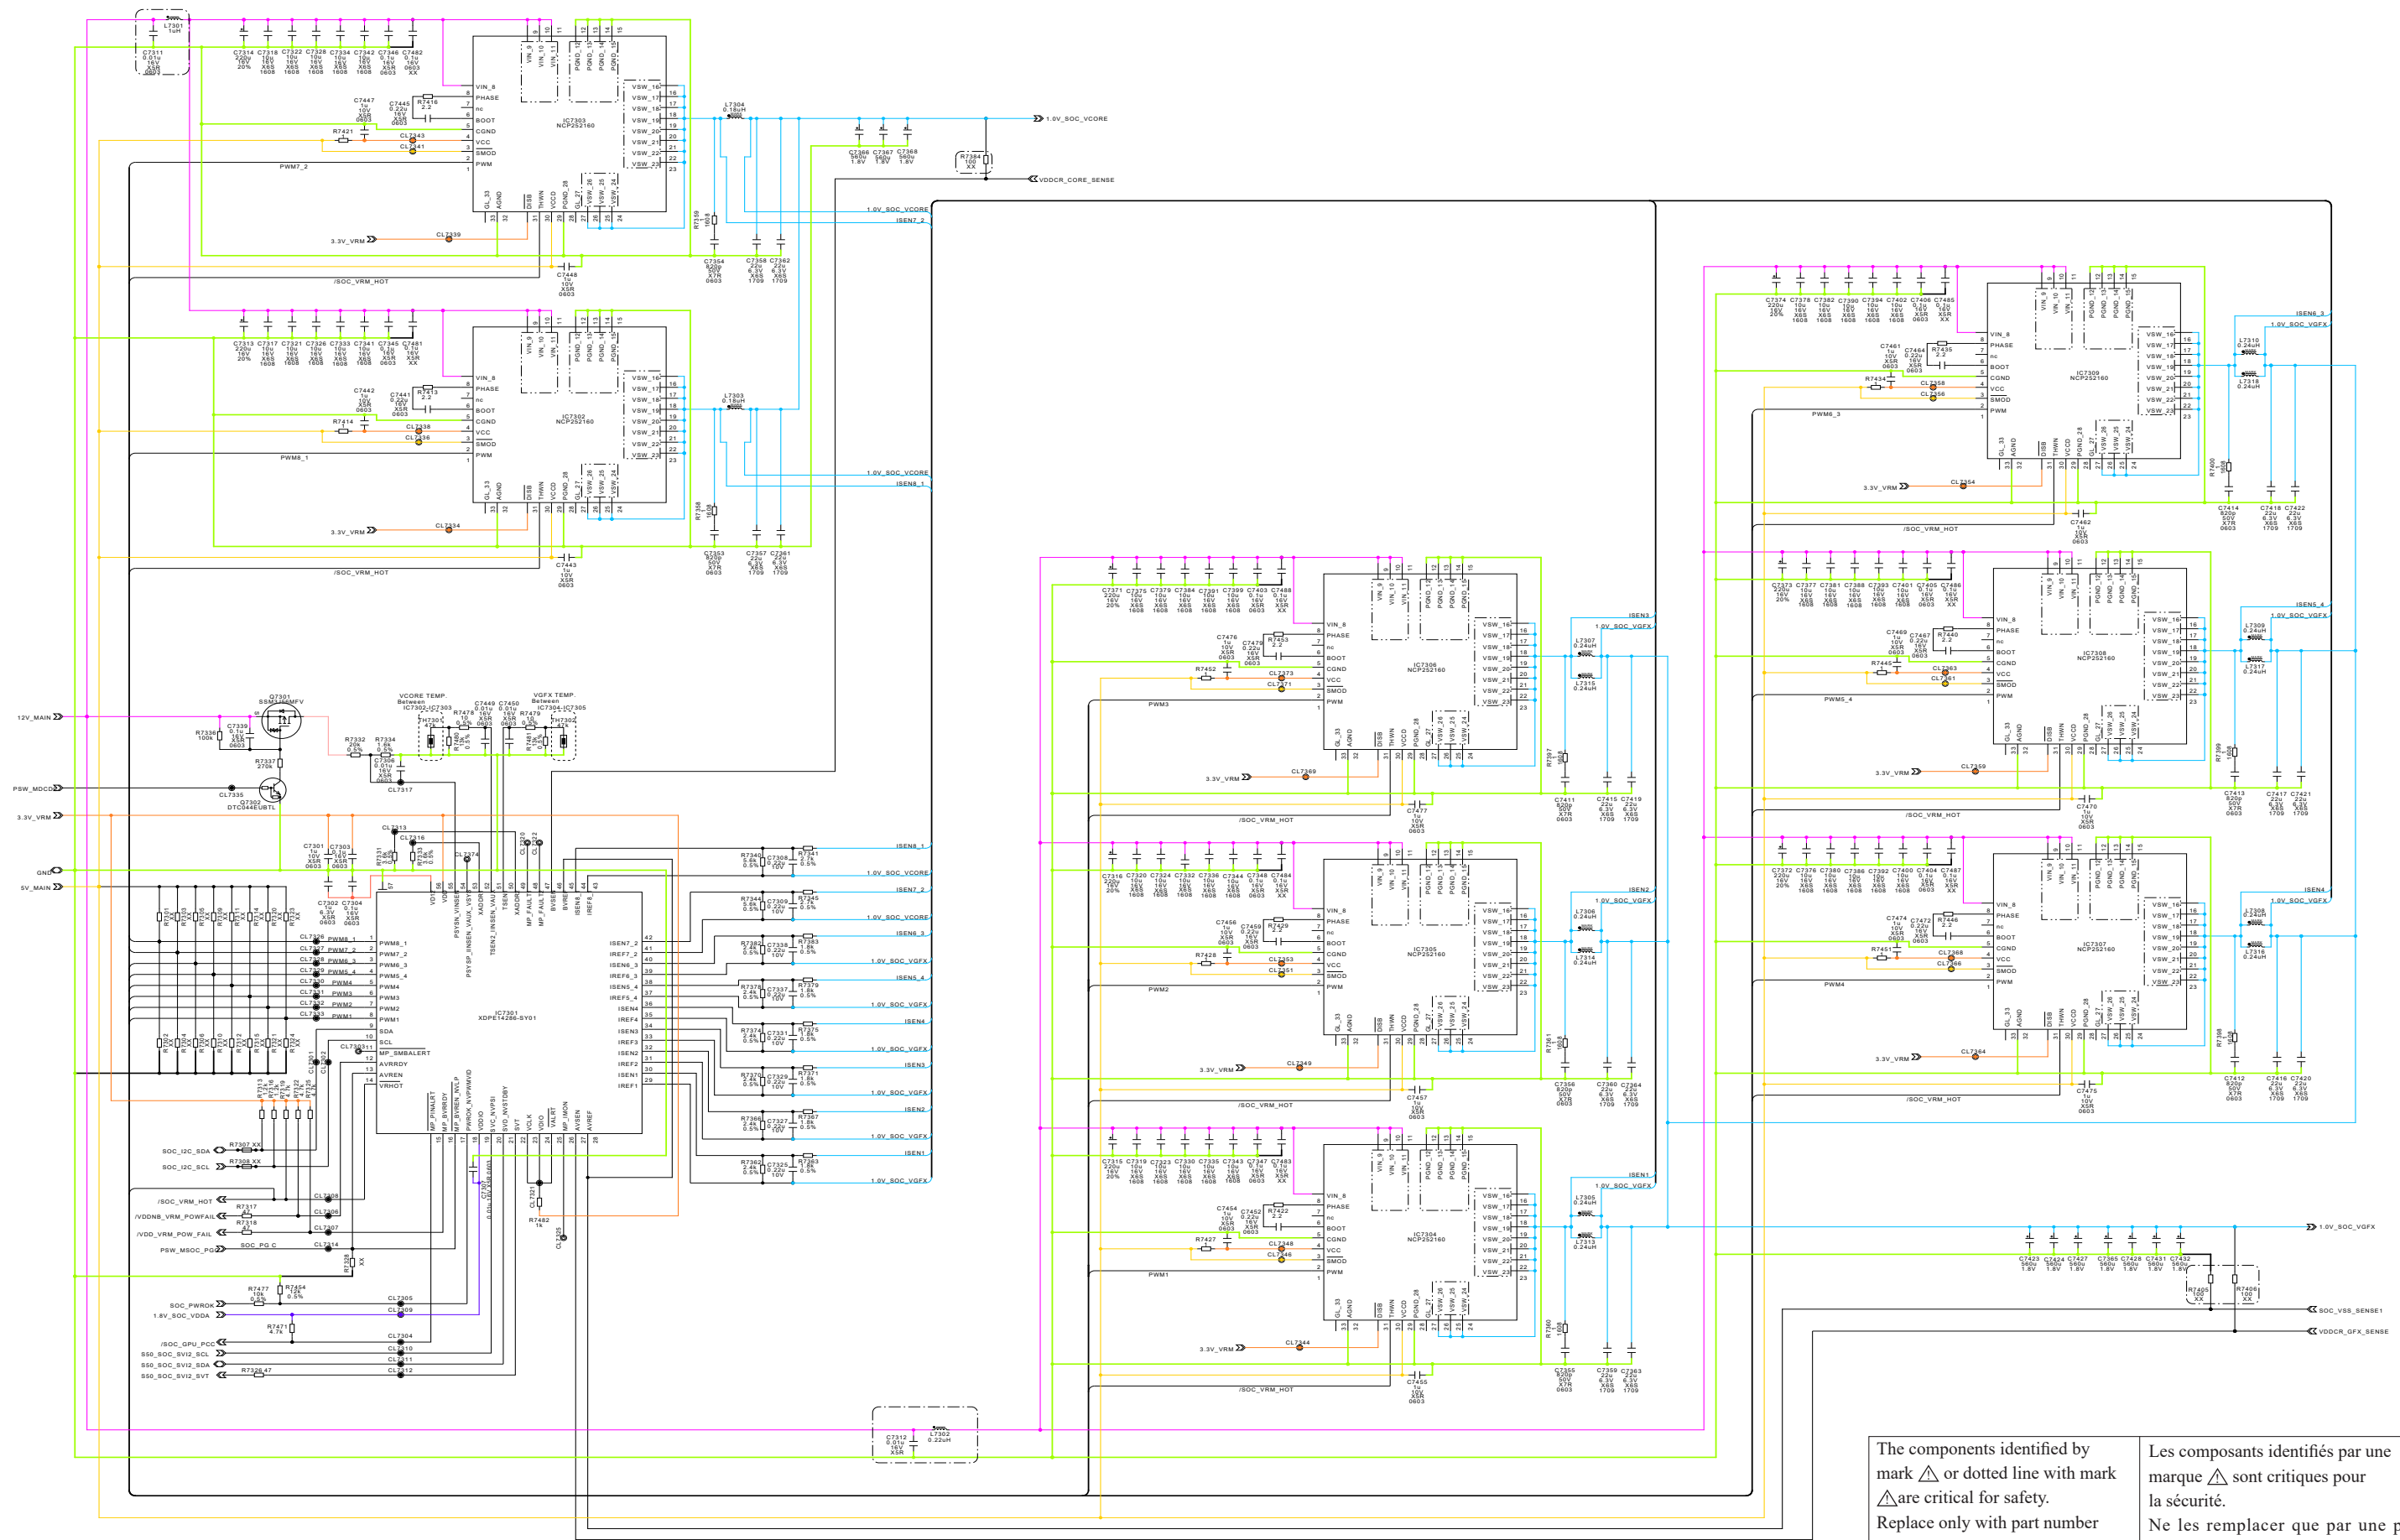

1-22. EDM-010 Board (22/23)



The components identified by mark  or dotted line with mark  are critical for safety.	Les composants identifiés par une marque  sont critiques pour la sécurité.
Replace only with part number specified.	Ne les remplacer que par une pièce portant le numéro spécifié.


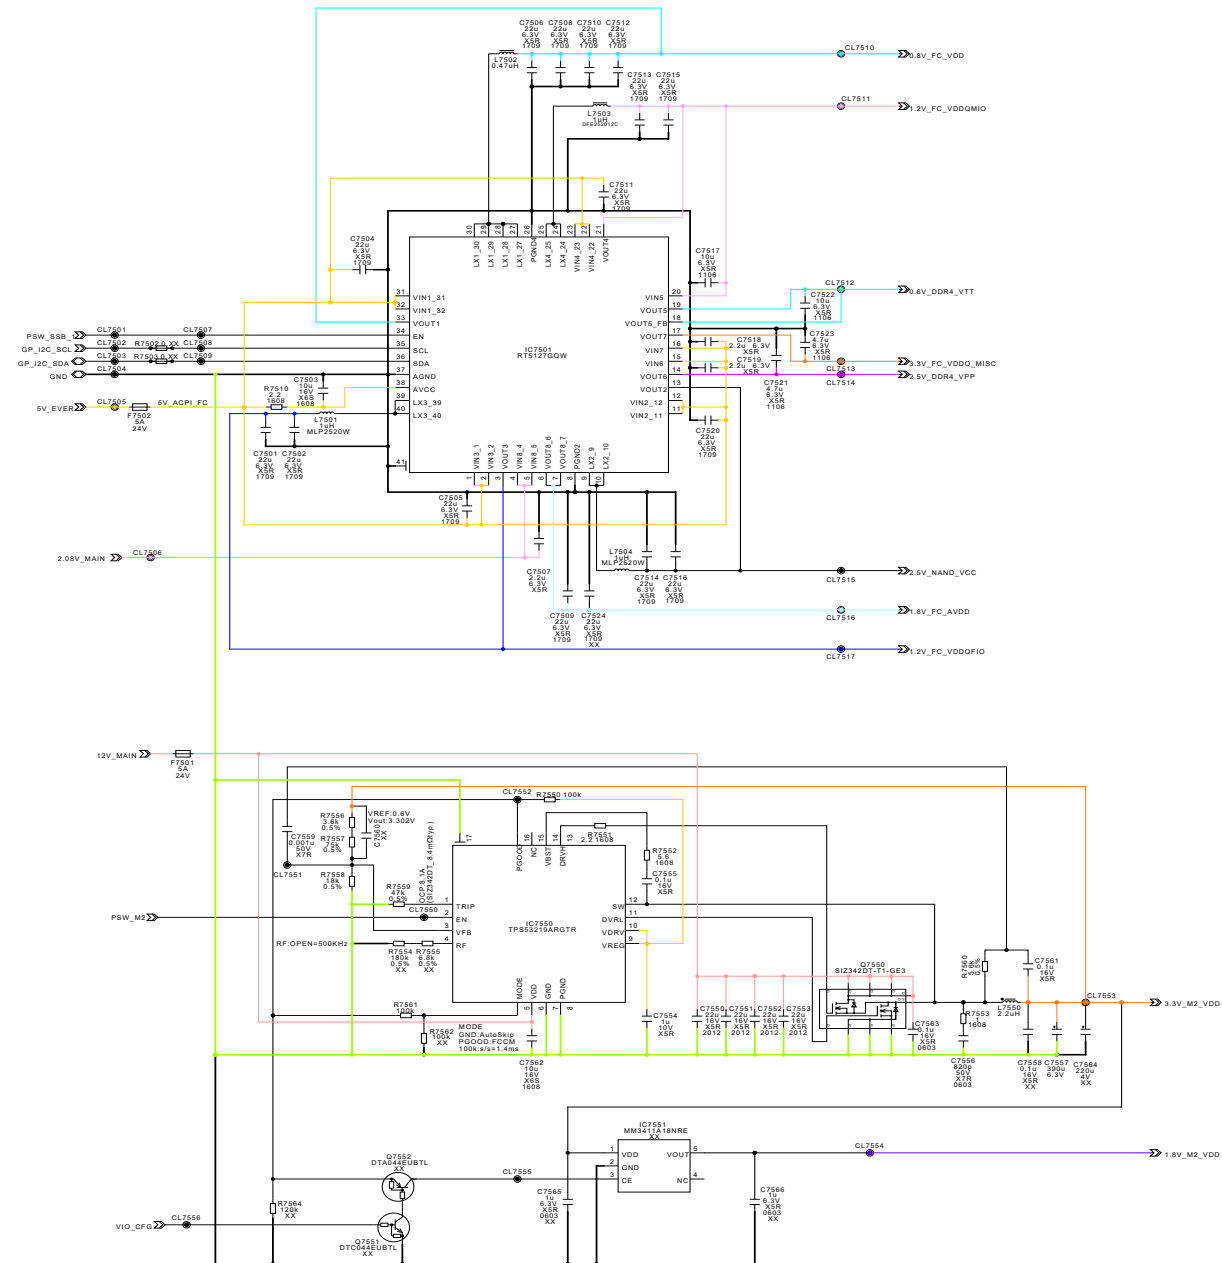
1-23. EDM-010 Board (23/23)






The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

Les composants identifiés par une
marque \triangle sont critiques pour
la sécurité.
Ne les remplacer que par une pièce
portant le numéro spécifié.


1-24. EDS-010 Board(1/1)

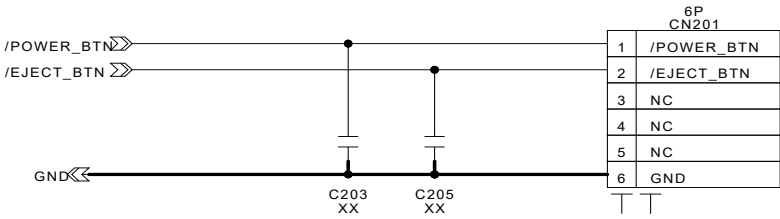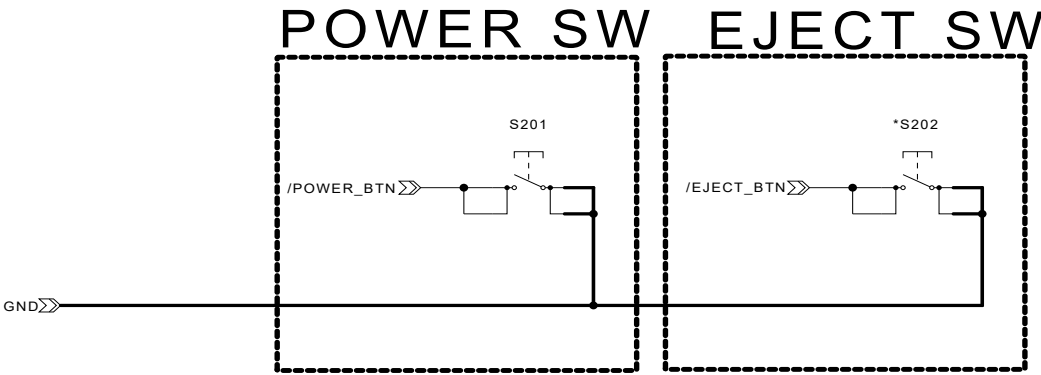

1-25. EDL-010 Board(1/1)

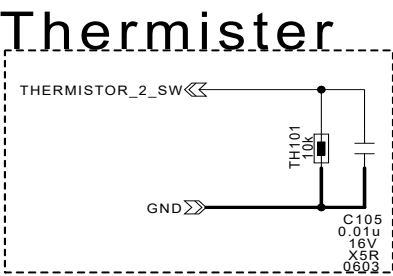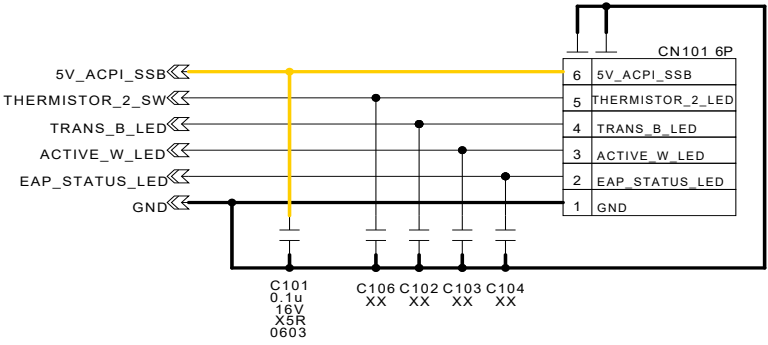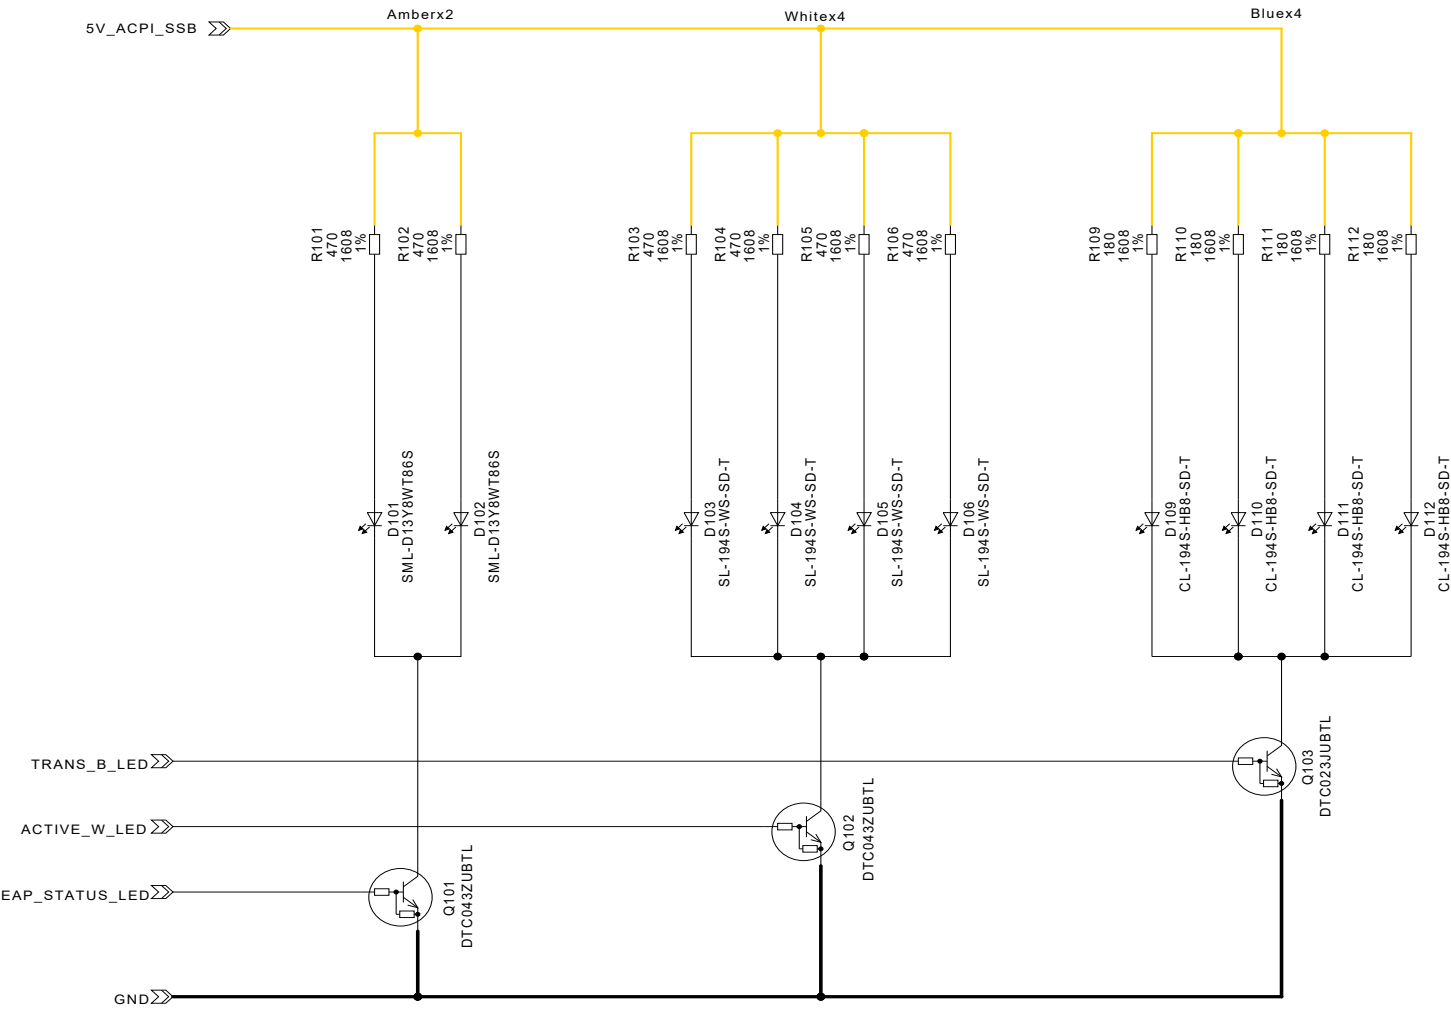


1-26. EDU-010 Board(1/1)

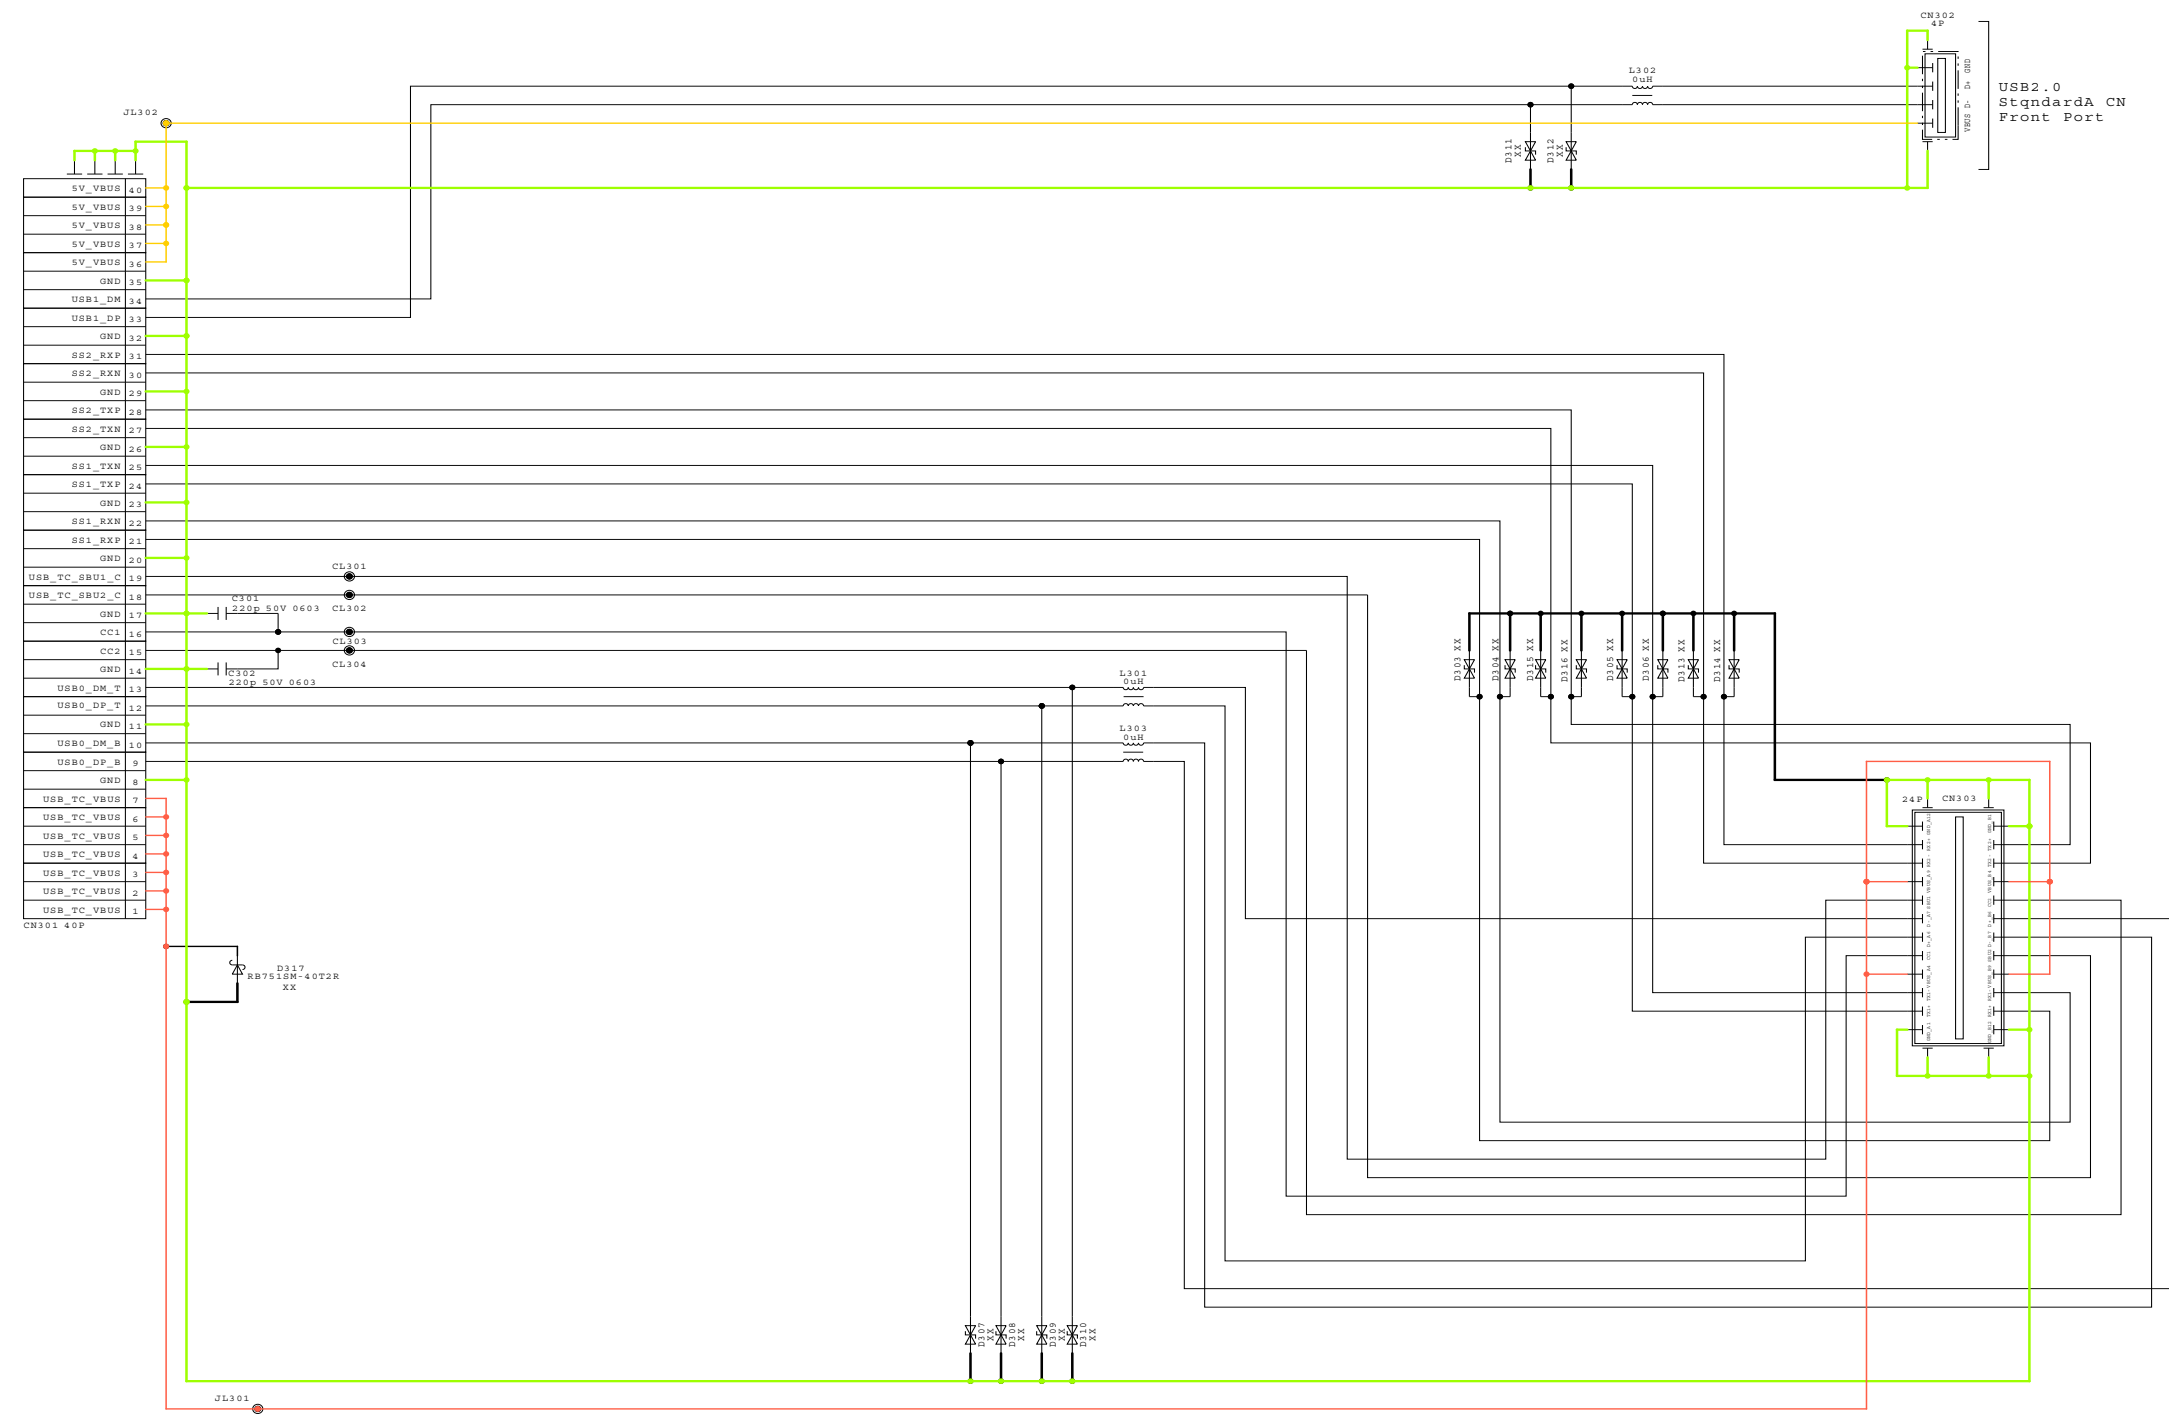


SECTION 2
PRINTED WIRING BOARDS

2-1. EDM-010 Board (Side A)

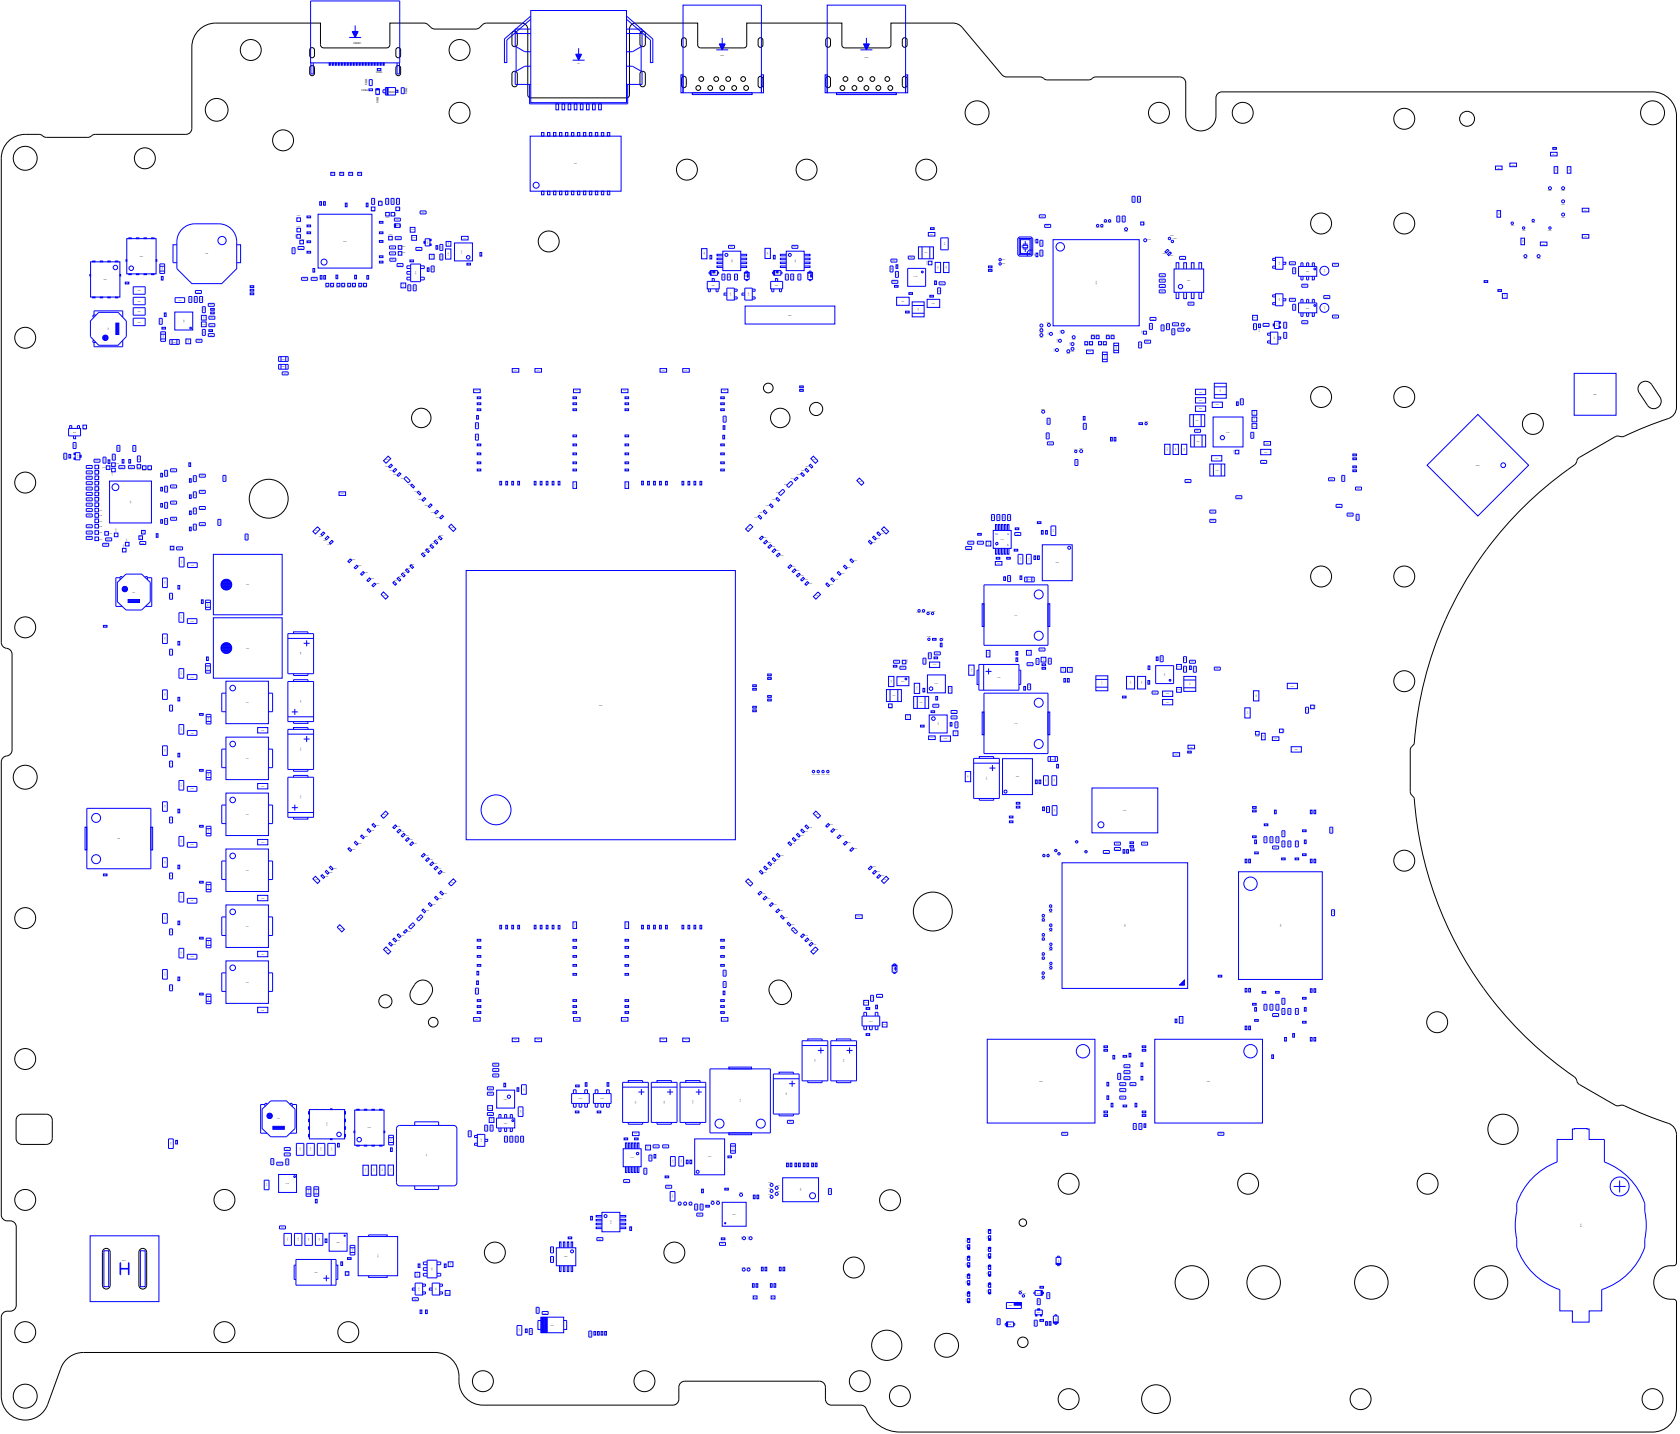


SECTION 2
PRINTED WIRING BOARDS


2-2. EDM-010 Board (Side B)

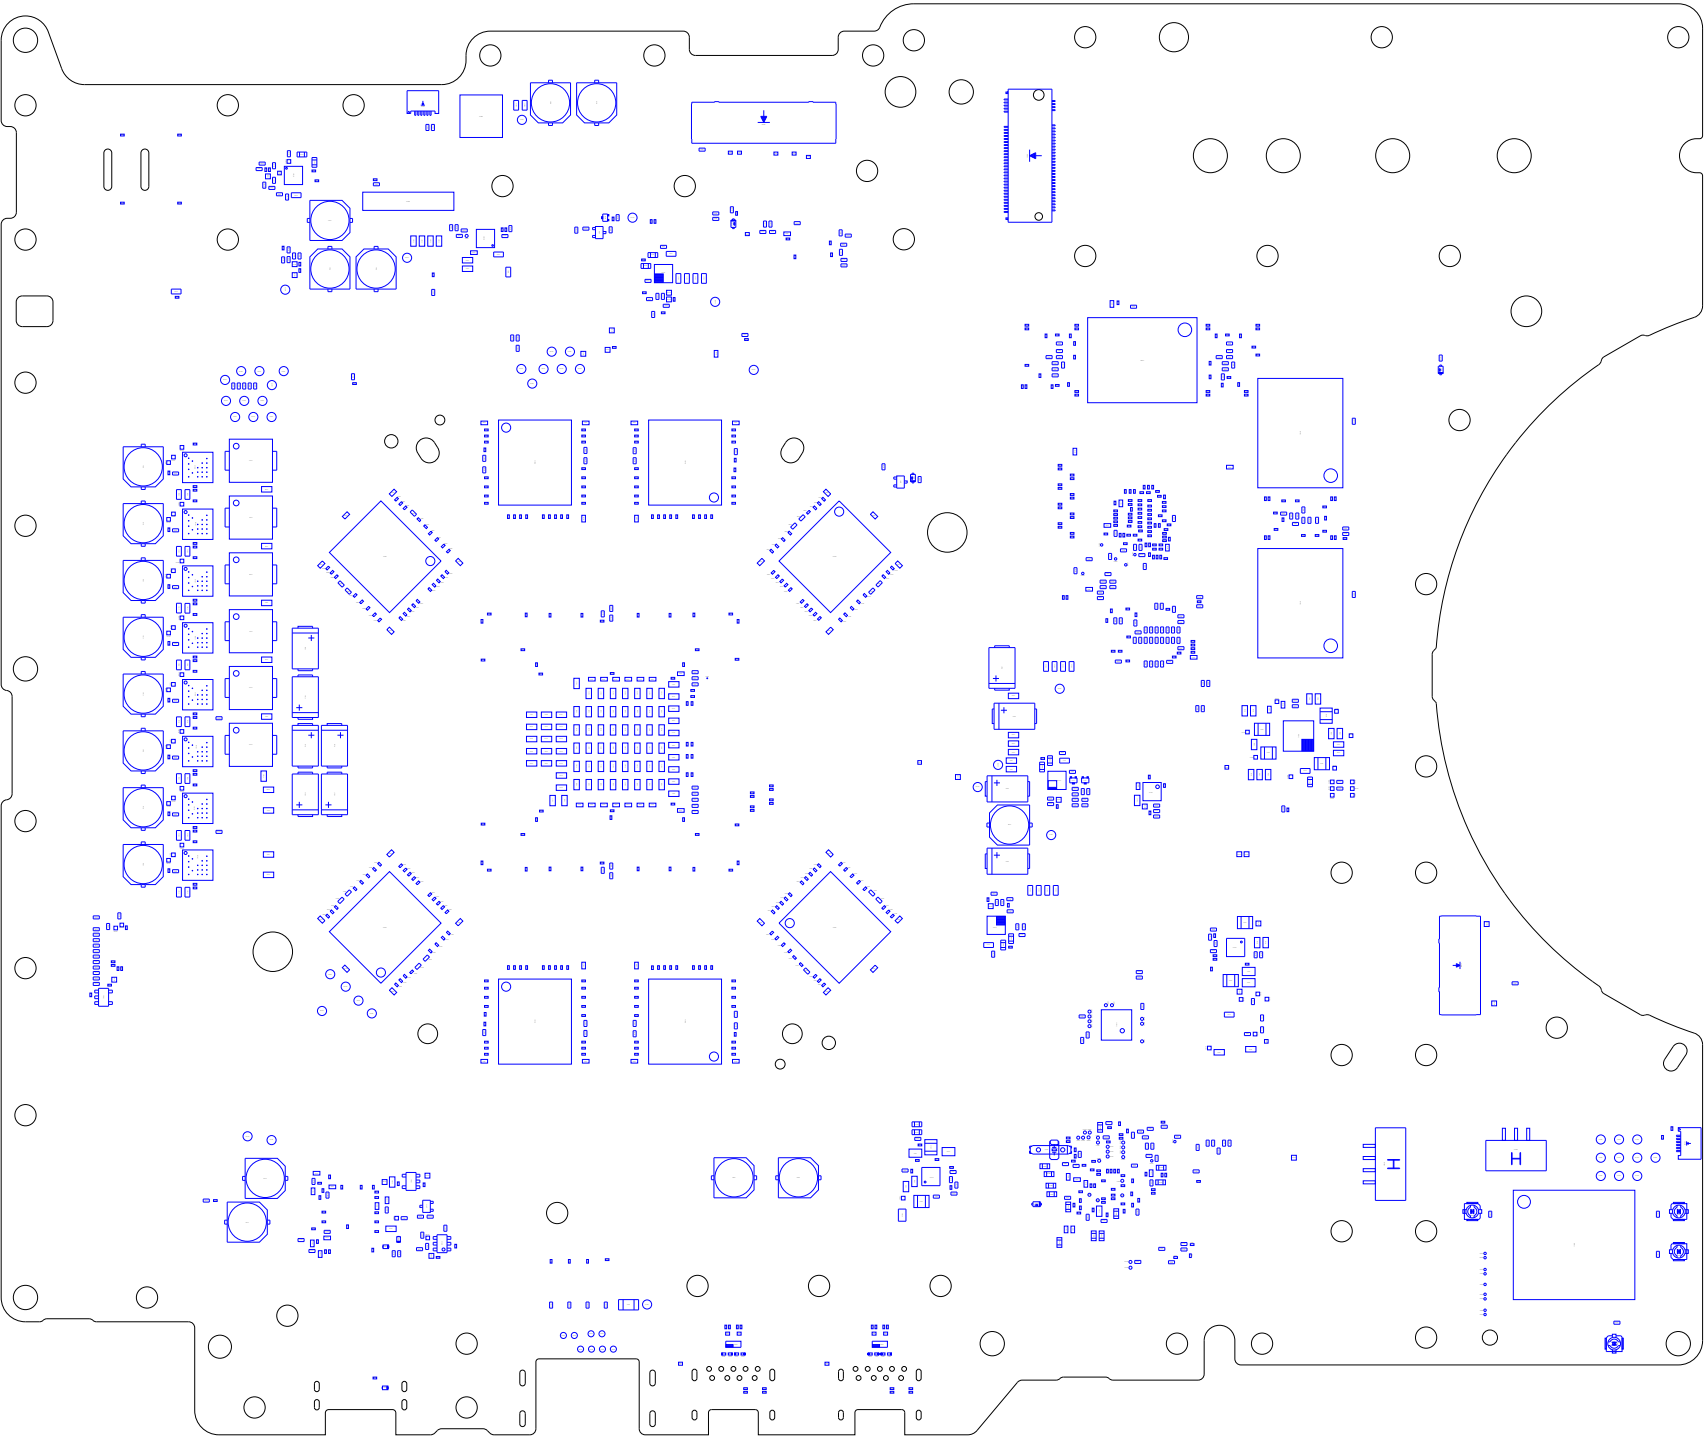


2-3. EDS-010 Board (Side A)

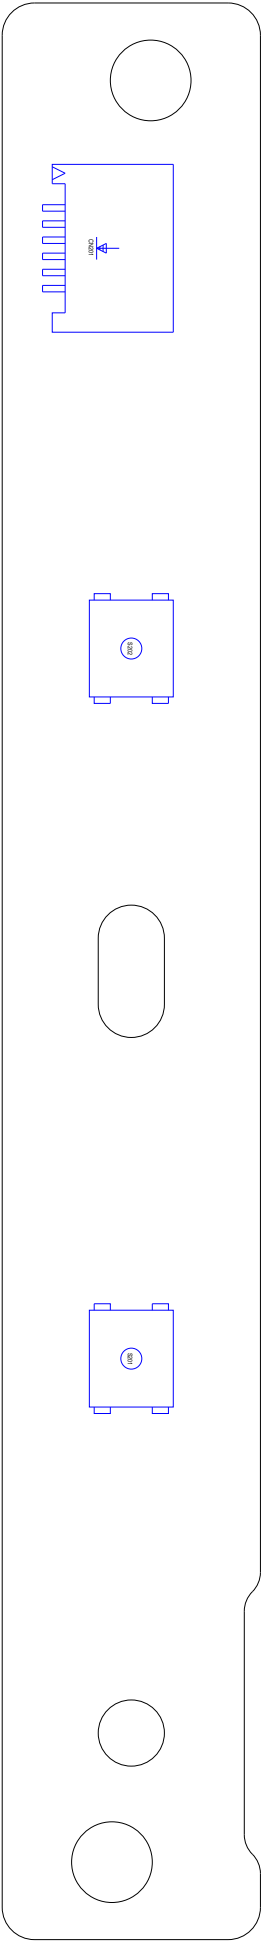


2-4. EDS-010 Board (Side B)

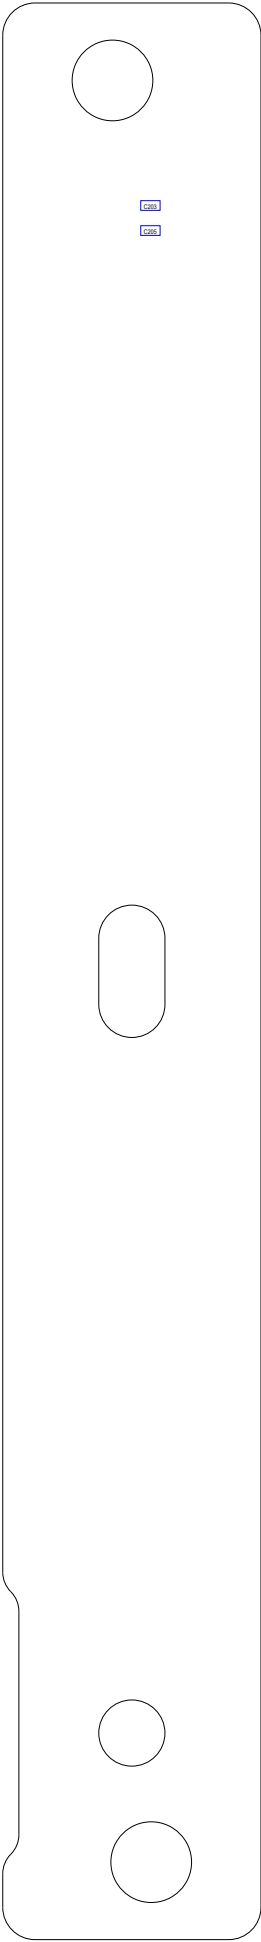


2-7. EDL-010 Board (Side A)

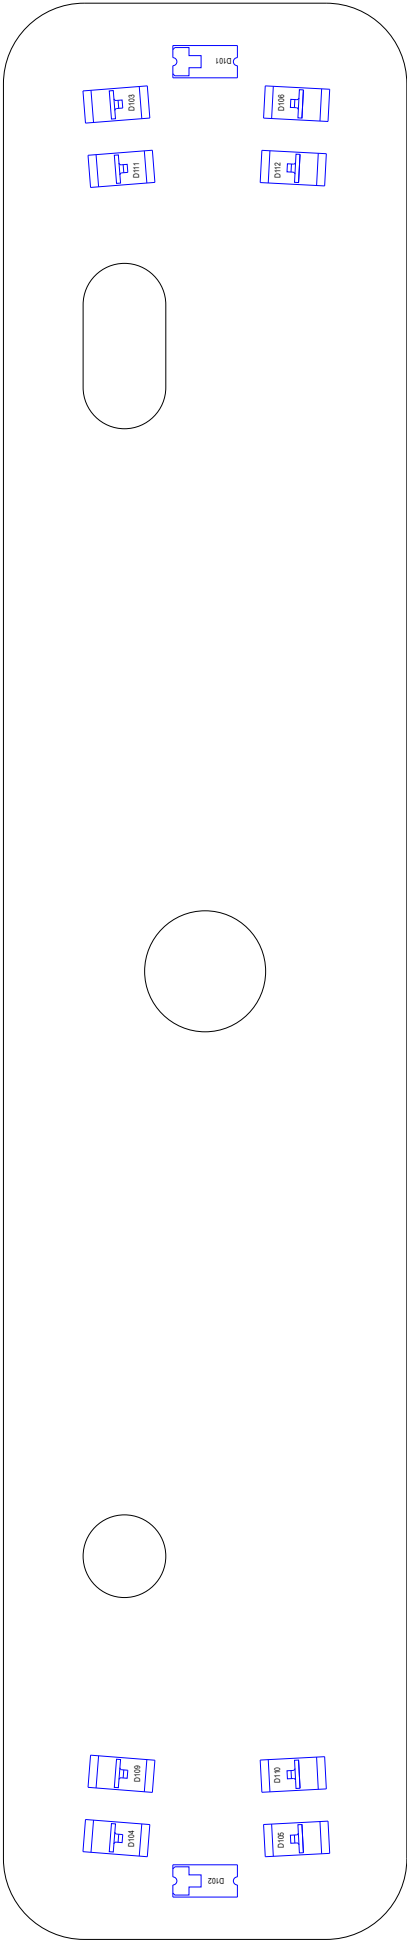


2-8. EDL-010 Board (Side B)

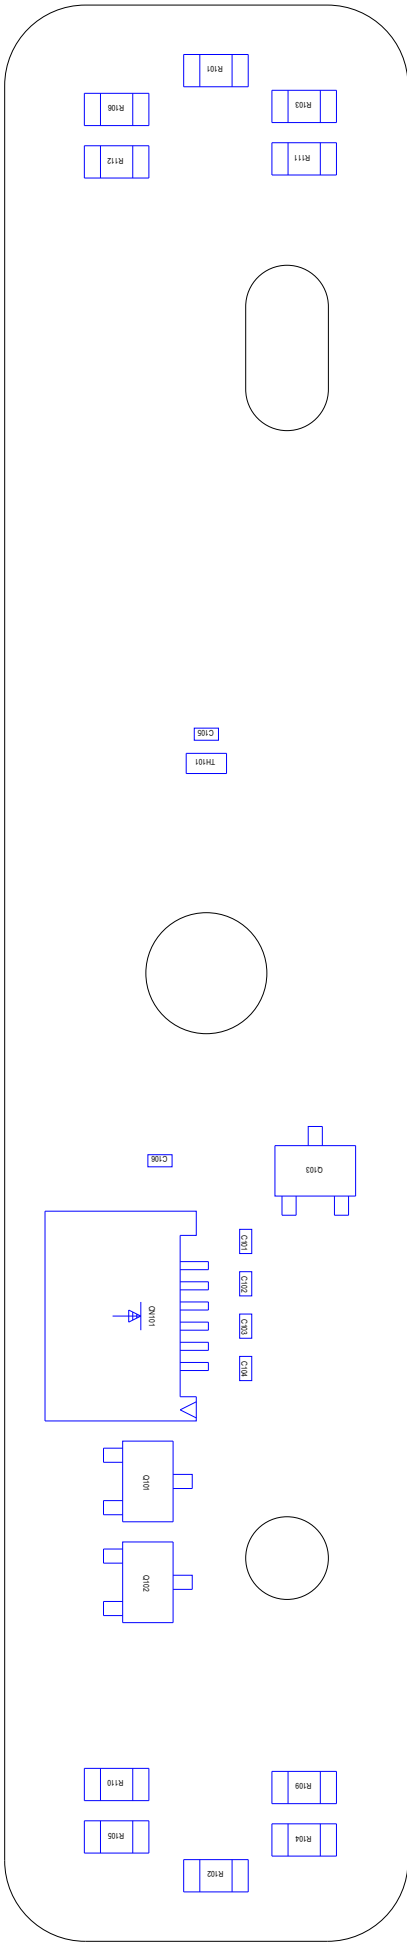

2-9. EDU-010 Board (Side A)

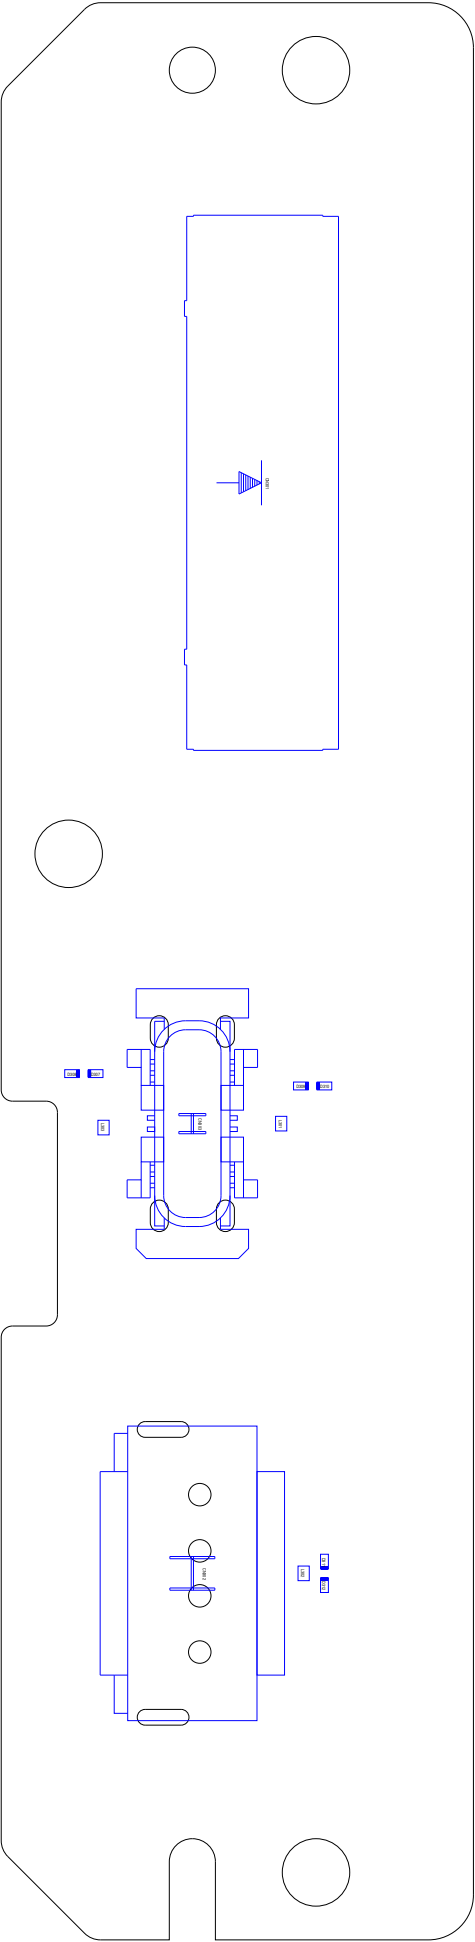

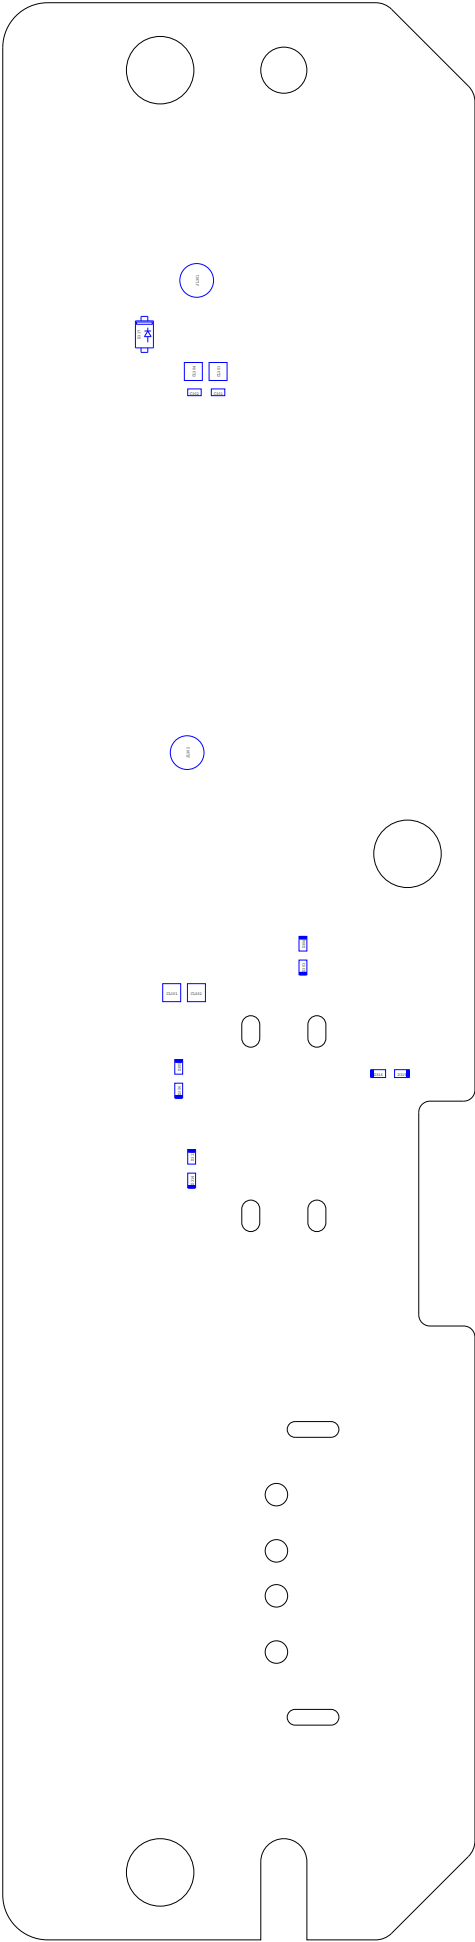

2-10. EDU-010 Board (Side B)




SECTION 3
ELECTRICAL PARTS LIST

NOTE:


- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- RESISTORS
METAL: Metal-film resistor.
F: nonflammable
- SEMICONDUCTORS
In each case, u : μ , for example:
uA.. : μ A.. uPA.. : μ PA..
uPB.. : μ PB.. uPC.. : μ PC.. uPD.. : μ PD..
• CAPACITORS
uF : μ F
- COILS
uH : μ H

The components identified by mark  or dotted line with mark  are critical for safety. Replace only with part number specified.

Les composants identifiés par une marque  sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.













When indicating parts by reference number, please include the board.

SPECIAL COMPONENT NOTICE

The components identified by mark  contain confidential information. Strictly follow the instructions whenever the components are repaired and/or replaced.

NOTE:

- SC Classification:
S : Supplied parts
U : Unsupplied parts
- Remark
* : With Drive Parts

SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark
< EDM-010 (E) >					U	C1034		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U		 A-5021-709-A	EDM-010 COMPL(E)(S)	*	U	C1035		CERAMIC CHIP 120PF COG 0603	5% 50V
U		 A-5024-585-A	EDM-010 COMPL(E)(M)	*	U	C1036		CERAMIC CHIP 120PF COG 0603	5% 50V
U		 A-5024-589-A	EDM-010 COMPL(E)(H)	*	U	C1037		CERAMIC CHIP 120PF COG 0603	5% 50V
U		 A5023189A	EDM-010 MOUNT(D)(S)		U	C1038		CERAMIC CHIP 120PF COG 0603	5% 50V
U		 A5024595A	EDM-010 MOUNT(D)(M)						
U		 A5024599A	EDM-010 MOUNT(D)(H)		U	C1039		CERAMIC CHIP 120PF COG 0603	5% 50V
< BATTERY HOLDER >					U	C1040		CERAMIC CHIP 120PF COG 0603	5% 50V
U	BH5001	1-756-889-12	HOLDER, LITHIUM BATTERY(CR203)		U	C1041		CERAMIC CHIP 120PF COG 0603	5% 50V
S	BH5001	1-853-561-11	HOLDER,LITHIUM BATTERY(CR2032)		U	C1042		CERAMIC CHIP 120PF COG 0603	5% 50V
< BUZZER >					U	C1101		CERAMIC CHIP (22MF)	20% 6.3V
S	BZ5102	1-825-579-11	BUZZER, PIEZOELECTRIC		U	C1102		CERAMIC CHIP (22MF)	20% 6.3V
< CAPACTOR >					U	C1103		CERAMIC CHIP (22MF)	20% 6.3V
					U	C1104		CERAMIC CHIP (22MF)	20% 6.3V
U	C1001		CERAMIC CHIP 100PF COG 0603	5% 50V	U	C1105		CERAMIC CHIP (22MF)	20% 6.3V
U	C1002		CERAMIC CHIP 100PF COG 0603	5% 50V	U	C1106		CERAMIC CHIP (22MF)	20% 6.3V
U	C1003		CERAMIC CHIP 100PF COG 0603	5% 50V					
U	C1009		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V	U	C1107		CERAMIC CHIP (22MF)	20% 6.3V
U	C1010		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V	U	C1110		CERAMIC CHIP (22MF)	20% 6.3V
					U	C1111		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C1011		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V	U	C1113		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1012		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V	U	C1114		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1013		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V					
U	C1014		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V	U	C1118		CERAMIC CHIP (22MF)	20% 6.3V
U	C1015		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V	U	C1119		CERAMIC CHIP (22MF)	20% 6.3V
					U	C1120		CERAMIC CHIP (22MF)	20% 6.3V
U	C1016		CERAMIC CHIP 0.22MF X5R (0603)	10% 16V	U	C1121		CERAMIC CHIP (22MF)	20% 6.3V
U	C1025		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C1122		CERAMIC CHIP (22MF)	20% 6.3V
U	C1026		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V					
U	C1027		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C1123		CERAMIC CHIP (22MF)	20% 6.3V
U	C1028		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C1124		CERAMIC CHIP (22MF)	20% 6.3V
					U	C1125		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
					U	C1126		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1029		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C1127		CERAMIC CHIP (22MF)	20% 6.3V
U	C1030		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V					
U	C1031		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V					
U	C1032		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V					
U	C1033		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V					


























SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark
U	C1128		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C1179		CERAMIC CHIP (22MF)	20% 6.3V
U	C1130		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1180		CERAMIC CHIP (22MF)	20% 6.3V
U	C1131		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1181		CERAMIC CHIP (22MF)	20% 6.3V
U	C1132		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1182		CERAMIC CHIP (22MF)	20% 6.3V
U	C1133		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1183		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C1134		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1184		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1135		CERAMIC CHIP (22MF)	20% 6.3V	U	C1186		CERAMIC CHIP (22MF)	20% 6.3V
U	C1136		CERAMIC CHIP (22MF)	20% 6.3V	U	C1187		CERAMIC CHIP (22MF)	20% 6.3V
U	C1137		CERAMIC CHIP (22MF)	20% 6.3V	U	C1188		CERAMIC CHIP (22MF)	20% 6.3V
U	C1138		CERAMIC CHIP (22MF)	20% 6.3V	U	C1189		CERAMIC CHIP (22MF)	20% 6.3V
U	C1139		CERAMIC CHIP (22MF)	20% 6.3V	U	C1190		CERAMIC CHIP (22MF)	20% 6.3V
U	C1140		CERAMIC CHIP (22MF)	20% 6.3V	U	C1193		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C1141		CERAMIC CHIP (22MF)	20% 6.3V	U	C1194		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1142		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1196		CERAMIC CHIP (22MF)	20% 6.3V
U	C1143		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1197		CERAMIC CHIP (22MF)	20% 6.3V
U	C1144		CERAMIC CHIP (22MF)	20% 6.3V	U	C1198		CERAMIC CHIP (22MF)	20% 6.3V
U	C1145		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C1199		CERAMIC CHIP (22MF)	20% 6.3V
U	C1147		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1200		CERAMIC CHIP (22MF)	20% 6.3V
U	C1148		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1202		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C1149		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1203		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1150		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1205		CERAMIC CHIP (22MF)	20% 6.3V
U	C1151		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1206		CERAMIC CHIP (22MF)	20% 6.3V
U	C1152		CERAMIC CHIP (22MF)	20% 6.3V	U	C1207		CERAMIC CHIP (22MF)	20% 6.3V
U	C1153		CERAMIC CHIP (22MF)	20% 6.3V	U	C1208		CERAMIC CHIP (22MF)	20% 6.3V
U	C1154		CERAMIC CHIP (22MF)	20% 6.3V	U	C1209		CERAMIC CHIP (22MF)	20% 6.3V
U	C1155		CERAMIC CHIP (22MF)	20% 6.3V	U	C1212		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1156		CERAMIC CHIP (22MF)	20% 6.3V	U	C1213		CERAMIC CHIP (22MF)	20% 6.3V
U	C1157		CERAMIC CHIP (22MF)	20% 6.3V	U	C1214		CERAMIC CHIP (22MF)	20% 6.3V
U	C1158		CERAMIC CHIP (22MF)	20% 6.3V	U	C1215		CERAMIC CHIP (22MF)	20% 6.3V
U	C1160		CERAMIC CHIP (22MF)	20% 6.3V	U	C1218		CERAMIC CHIP (22MF)	20% 6.3V
U	C1161		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C1223		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1163		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1224		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1165		CERAMIC CHIP (22MF)	20% 6.3V	U	C1225		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1166		CERAMIC CHIP (22MF)	20% 6.3V	U	C1226		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1167		CERAMIC CHIP (22MF)	20% 6.3V	U	C1227		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1168		CERAMIC CHIP (22MF)	20% 6.3V	U	C1228		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1169		CERAMIC CHIP (22MF)	20% 6.3V	U	C1229		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1170		CERAMIC CHIP (22MF)	20% 6.3V	U	C1230		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1171		CERAMIC CHIP (22MF)	20% 6.3V	U	C1231		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1172		CERAMIC CHIP (22MF)	20% 6.3V	U	C1232		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1173		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C1233		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1174		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C1234		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1176		CERAMIC CHIP (22MF)	20% 6.3V	U	C1235		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1177		CERAMIC CHIP (22MF)	20% 6.3V	U	C1236		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C1178		CERAMIC CHIP (22MF)	20% 6.3V	U	C1237		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V

SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark	
U	C1238		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2022		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2106		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1239		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2023		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2107		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C1240		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2024		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2108		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1241		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2025		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2109		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1242		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2026		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2110		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1243		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2027		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2112		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C1244		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2028		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2113		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1245		CERAMIC CHIP (22MF)	20%	6.3V	U	C2029		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2114		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1246		CERAMIC CHIP (22MF)	20%	6.3V	U	C2030		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2115		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1247		CERAMIC CHIP (22MF)	20%	6.3V	U	C2031		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2116		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1248		CERAMIC CHIP (22MF)	20%	6.3V	U	C2032		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2117		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C1255		CERAMIC CHIP (22MF)	20%	6.3V	U	C2033		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2118		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1256		CERAMIC CHIP (22MF)	20%	6.3V	U	C2034		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2119		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1257		CERAMIC CHIP (22MF)	20%	6.3V	U	C2035		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2120		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1258		CERAMIC CHIP (22MF)	20%	6.3V	U	C2036		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2121		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1259		CERAMIC CHIP (22MF)	20%	6.3V	U	C2037		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2122		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1260		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2038		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2123		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C1261		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2039		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2124		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1264		CERAMIC CHIP (22MF)	20%	6.3V	U	C2040		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2125		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1265		CERAMIC CHIP (22MF)	20%	6.3V	U	C2041		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2126		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1266		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2042		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2127		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1267		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2043		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2128		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1268		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2044		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2129		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1269		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2045		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2130		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C1270		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2046		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2131		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C2001		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2047		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2132		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2002		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2048		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2133		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2003		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2049		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2134		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2004		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2050		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2135		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2005		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2051		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2136		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2006		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2052		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2137		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2007		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2053		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2138		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C2008		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2054		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2139		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2010		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2055		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2140		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2011		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2056		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2141		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2012		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2057		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2143		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C2013		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2058		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2144		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2014		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2059		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2145		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2015		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2060		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2146		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2016		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2062		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2147		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2017		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2101		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2148		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C2018		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2102		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2149		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2019		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2103		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2150		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2020		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2104		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2151		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2021		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2105		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2152		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2022		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2106		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2153		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2023		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2107		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2154		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2024		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2108		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2155		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C2025		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2109		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2156		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2026		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2110		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2157		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2027		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2111		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2158		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2028		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2112		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2159		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2029		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2113		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2160		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2030		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2114		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2161		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2031		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2115		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2162		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2032		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2116		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2163		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2033		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2117		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2164		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2034		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2118		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2201		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C2035		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2119		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2202		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2036		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2120		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2203		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2037		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2121		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2204		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2038		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2122		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2205		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2039		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2123		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2206		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2040		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2124		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2207		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2041		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2125		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2208		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C2042		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2126		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2209		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2043		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2127		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2210		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2044		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2128		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2211		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2045		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2129		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2212		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2046		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2130		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2213		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2047		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2131		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2214		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2048		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2132		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C2215		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C2049		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V	U	C2133		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U</					

SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark
U	C2235		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2317		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C2363		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C2236		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2318		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2465		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C2237		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2319		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2466		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C2238		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2320		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3001		CERAMIC CHIP (22MF)	20% 6.3V
U	C2239		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C2321		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3002		CERAMIC CHIP (22MF)	20% 6.3V
U	C2240		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2322		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3005		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2241		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2323		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3006		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2242		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2324		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3007		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2243		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2325		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3008		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2244		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C2326		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3009		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2245		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2327		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3010		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2246		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2328		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3011		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2247		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2330		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3012		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2248		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2331		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3013		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2249		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C2332		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3015		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2250		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2333		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3016		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2251		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2334		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3017		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2252		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2335		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3018		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2253		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2336		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3019		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2254		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2337		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3020		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2255		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C2338		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3021		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2256		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2339		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3022		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2257		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2340		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3023		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2258		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2341		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3024		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2259		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2342		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3025		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2260		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2343		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3026		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2262		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2344		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3027		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2263		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2345		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3028		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2264		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2346		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3029		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C2301		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2347		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3030		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2302		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2348		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3031		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2303		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2349		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3032		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2304		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2350		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3033		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C2305		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2351		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3034		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C2306		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2352		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3064		CERAMIC CHIP 100PF COG 0603	5% 50V
U	C2307		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C2353		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3065		CERAMIC CHIP 100PF COG 0603	5% 50V
U	C2308		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2354		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3501		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C2309		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2355		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3502		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C2310		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2356		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3503		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C2311		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2357		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3504		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C2312		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C2358		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3505		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C2313		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2359		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3506		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C2314		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2360		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3507		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C2315		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2361		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3508		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C2316		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C2362		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3509		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C3510		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3515		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C3515		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C3511		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C3516		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C3516		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C3512		CERAMIC CHIP 10UF X5R (1106)	20% 6.3V	U	C3517		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C3517		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V
U	C3513		CERAMIC CHIP 2.2MF X5R 1005	20% 6.3V	U	C3521		CERAMIC CHIP 10MF X6S 1608	20% 16V	U	C3521		CERAMIC CHIP 10MF X6S 1608	20% 16V
U	C3514		CERAMIC CHIP 0.1MF X5R 0603	10% 6.3V	U	C3523		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3523		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C3524		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3524		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3524		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V
U	C3525		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3525		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3525		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V
U	C3526		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3526		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3526		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C3527		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3527		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3527		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C3528		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3528		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3528		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C3529		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3529		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3529		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C3530		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3530		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3530		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V
U	C3531		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3531		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V	U	C3531		CERAMIC CHIP 0.33MF X5R (0603)	10% 6.3V
U	C3532		CERAMIC CHIP 0.022MF X5R(0603)	10% 10V	U	C3532		CERAMIC CHIP 0.022MF X5R(0603)	10% 10V	U	C3532		CERAMIC CHIP 0.022MF X5R(0603)	10% 10V
U	C3534		CERAMIC CHIP 10MF X6S 1608	20% 16V	U	C3534		CERAMIC CHIP 10MF X6S 1608	20% 16V	U	C3534		CERAMIC CHIP 10MF X6S 1608	20% 16V
S	C3535	1-118-660-11	ELECT CHIP 220MF	20% 16V	S	C3535	1-118-660-11	ELECT CHIP 220MF	20% 16V	S	C3535	1-118-660-11	ELECT CHIP 220MF	20% 16V
U	C3535	1-118-671-11	ELECT CHIP 220MF	20% 16V	U	C3535	1-118-671-11	ELECT CHIP 220MF	20% 16V	U	C3535	1-118-671-11	ELECT CHIP 220MF	20% 16V
U	C3535	1-120-812-11	ELECT CHIP 220MF	20% 16V	U	C3535	1-120-812-11	ELECT CHIP 220MF	20% 16V	U	C3535	1-120-812-11	ELECT CHIP 220MF	20% 16V
U	C3538		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3538		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3538		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C3540		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3540		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V	U	C3540		CERAMIC CHIP 1UF X5R (0603)	20% 6.3V
U	C3541		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3541		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V	U	C3541		CERAMIC CHIP 4.7UFX5R(1106)	20% 6.3V
U	C3542		CERAMIC CHIP (22MF)	20% 6.3V	U	C3542		CERAMIC CHIP (22MF)	20% 6.3V	U	C3542		CERAMIC CHIP (22MF)	20% 6.3V
U	C3544		CERAMIC CHIP 10MF X6S 1608	20% 16V	U	C3544		CERAMIC CHIP 10MF X6S 1608	20% 16V	U	C3544		CERAMIC CHIP 10MF X6S 1608	20% 16V
U	C3545		CERAMIC CHIP 0.047MF X7R 1005	10% 25V	U	C3545		CERAMIC CHIP 0.047MF X7R 1005	10% 25V	U	C3545		CERAMIC CHIP 0.047MF X7R 1005	10% 25V
U	C3593		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3593		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3593		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C3605		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3605		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3605		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C3606		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3606		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V	U	C3606		CERAMIC CHIP 0.1MF X5R (0603)	10% 16V
U	C3607		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3607		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3607		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
U	C3608		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3608		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V	U	C3608		CERAMIC CHIP 0.22MF X5R 0603	20% 6.3V
S	C3609	1-118-660-11	ELECT CHIP 220MF	20% 16V	S	C3609	1-118-660-11	ELECT CHIP 220MF	20% 16V	S	C3609	1-118-660-11	ELECT CHIP 220MF	20% 16V
U	C3609	1-												

SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark	
U	C7009		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7069		CERAMIC CHIP (22MF)	20%	6.3V	U	C7126		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7181		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7010		CERAMIC CHIP 10UF X5R (1106)	20%	6.3V	U	C7070		CERAMIC CHIP (22MF)	20%	6.3V	U	C7127		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7182		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7011		CERAMIC CHIP 2.2MF X5R 1005	20%	6.3V	U	C7071		CERAMIC CHIP (22MF)	20%	6.3V	U	C7128		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7183		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7012		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7072		CERAMIC CHIP (22MF)	20%	6.3V	U	C7129		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7184		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7013		CERAMIC CHIP (22MF)	20%	6.3V	U	C7073		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7130		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7185		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7014		CERAMIC CHIP (22MF)	20%	6.3V	U	C7074		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	S	C7132	1-120-740-11	ELECT CHIP 390MF (6X6)	20%	6.3V	U	C7186		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7015		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7075		CERAMIC CHIP 10UF X5R (1106)	20%	6.3V	U	C7132	1-120-807-11	ELECT CHIP 390MF (6X6)	20%	6.3V	U	C7188		CERAMIC CHIP 820PF X7R 0603	10%	50V
U	C7016		CERAMIC CHIP (22MF)	20%	6.3V	U	C7076		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7132	1-122-191-11	ELECT CHIP 390MF (6X6)	20%	6.3V	U	C7189		CERAMIC CHIP 820PF X7R 0603	10%	50V
U	C7017		CERAMIC CHIP 2.2MF X5R 1005	20%	6.3V	U	C7077		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7134		CERAMIC CHIP (22MF)	20%	6.3V	U	C7190		CERAMIC CHIP 820PF X7R 0603	10%	50V
U	C7018		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7078		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7135		CERAMIC CHIP (22MF)	20%	6.3V	U	C7191		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7019		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7079		CERAMIC CHIP 0.022MF X5R(0603)	10%	10V	U	C7136		CERAMIC CHIP (22MF)	20%	6.3V	S	C7197	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7020		CERAMIC CHIP 2.2MF X5R 1005	20%	6.3V	U	C7080		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7137		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7198		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7021		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7081		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7138		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	S	C7199	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7022		CERAMIC CHIP (22MF)	20%	6.3V	U	C7082		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7139		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	S	C7201	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7023		CERAMIC CHIP 2.2MF X5R 1005	20%	6.3V	U	C7083		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7140		CERAMIC CHIP 1000PF X7R 0603	10%	50V	S	C7203	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7024		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7084		CERAMIC CHIP (22MF)	20%	6.3V	U	C7143		CERAMIC CHIP (22MF)	20%	6.3V	S	C7204	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7025		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7085		CERAMIC CHIP 1000PF X7R 0603	10%	50V	U	C7149		CERAMIC CHIP 1000PF X7R 0603	10%	50V	S	C7205	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7026		CERAMIC CHIP 22PF C0G 0603	5%	50V	U	C7086		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7150		CERAMIC CHIP 1000PF X7R 0603	10%	50V	S	C7206	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7027		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7087		CERAMIC CHIP 10PF C0G 0603	5%	50V	U	C7151		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7208		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7028		CERAMIC CHIP 22MF X5R (2012)	20%	16V	U	C7088		CERAMIC CHIP 10PF C0G 0603	5%	50V	U	C7152		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7212	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7029		CERAMIC CHIP (22MF)	20%	6.3V	U	C7089		CERAMIC CHIP 10PF C0G 0603	5%	50V	U	C7153		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7213		CERAMIC CHIP 10UF X5R (1106)	20%	6.3V
U	C7030		CERAMIC CHIP (22MF)	20%	6.3V	U	C7090		CERAMIC CHIP 10PF C0G 0603	5%	50V	U	C7154		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7214		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V
U	C7031		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7101		CERAMIC CHIP 10UF X5R (1106)	20%	6.3V	U	C7155		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7215		CERAMIC CHIP 0.022MF X5R(0603)	10%	10V
U	C7032		CERAMIC CHIP (22MF)	20%	6.3V	U	C7102		CERAMIC CHIP 10UF X5R (1106)	20%	6.3V	U	C7156		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7216		CERAMIC CHIP (22MF)	20%	6.3V
U	C7033		CERAMIC CHIP (22MF)	20%	6.3V	U	C7103		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7157		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7217		CERAMIC CHIP 1000PF X7R 0603	10%	50V
U	C7034		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7104		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7158		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7228		CERAMIC CHIP 0.022MF X5R(0603)	10%	10V
U	C7035		CERAMIC CHIP (22MF)	20%	6.3V	U	C7106		CERAMIC CHIP 0.022MF X5R(0603)	10%	10V	U	C7159		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7229		CERAMIC CHIP 0.022MF X5R(0603)	10%	10V
U	C7036		CERAMIC CHIP (22MF)	20%	6.3V	U	C7107		CERAMIC CHIP 0.022MF X5R(0603)	10%	10V	U	C7160		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7231		CERAMIC CHIP 47UF X5R (2012)	20%	6.3V
U	C7037		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7108		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7161		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7232		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
S	C7042	1-120-740-11	ELECT CHIP 390MF (6X6)	20%	6.3V	U	C7109		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7162		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7233		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V
U	C7042	1-120-807-11	ELECT CHIP 390MF (6X6)	20%	6.3V	U	C7110		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7163		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7234		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V
U	C7042	1-122-191-11	ELECT CHIP 390MF (6X6)	20%	6.3V	U	C7112		CERAMIC CHIP (22MF)	20%	6.3V	U	C7164		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7235		CERAMIC CHIP 22PF C0G 0603	5%	50V
U	C7050		CERAMIC CHIP 47UF X5R (2012)	20%	6.3V	U	C7113		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7165		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7236		CERAMIC CHIP (22MF)	20%	6.3V
U	C7051		CERAMIC CHIP 47UF X5R (2012)	20%	6.3V	U	C7114		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7166		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7237		CERAMIC CHIP (22MF)	20%	6.3V
U	C7052		CERAMIC CHIP 47UF X5R (2012)	20%	6.3V	U	C7115		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7167		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7244	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7053		CERAMIC CHIP 47UF X5R (2012)	20%	6.3V	U	C7116		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V	U	C7169		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7245	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7054		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7117		CERAMIC CHIP (22MF)	20%	6.3V	U	C7170		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7247	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V
U	C7055		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7118		CERAMIC CHIP (22MF)	20%	6.3V	U	C7171		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7301		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V
U	C7056		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7119		CERAMIC CHIP 22PF C0G 0603	5%	50V	U	C7173		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7302		CERAMIC CHIP 1UF X5R (0603)	20%	6.3V
U	C7057		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7120		CERAMIC CHIP (22MF)	20%	6.3V	U	C7174		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7303		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7058		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7121		CERAMIC CHIP 47UF X5R (2012)	20%	6.3V	U	C7175		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7304		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7062		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7122		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7177		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7306		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V
U	C7063		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7123		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7178		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7307		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V
U	C7065		CERAMIC CHIP 22PF C0G 0603	5%	50V	U	C7124		CERAMIC CHIP 1000PF X7R 0603	10%	50V	U	C7179		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7308		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V
U	C7066		CERAMIC CHIP 22PF C0G 0603	5%	50V	U	C7125		CERAMIC CHIP 1000PF X7R 0603	10%	50V	U	C7180		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7309		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V

SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark	
U	C7311		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7353		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7400		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7472		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V
U	C7312		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7354		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7401		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7474		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V
S	C7313	1-118-660-11	ELECT CHIP 220MF	20%	16V	U	C7355		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7402		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7475		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V
U	C7313	1-118-671-11	ELECT CHIP 220MF	20%	16V	U	C7356		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7403		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7476		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V
U	C7313	1-120-812-11	ELECT CHIP 220MF	20%	16V	U	C7357		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7404		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7477		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V
S	C7314	1-118-660-11	ELECT CHIP 220MF	20%	16V	U	C7358		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7405		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7479		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V
U	C7314	1-118-671-11	ELECT CHIP 220MF	20%	16V	U	C7359		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7406		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7501		CERAMIC CHIP (22MF)	20%	6.3V
U	C7314	1-120-812-11	ELECT CHIP 220MF	20%	16V	U	C7360		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7411		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7502		CERAMIC CHIP (22MF)	20%	6.3V
S	C7315	1-118-660-11	ELECT CHIP 220MF	20%	16V	U	C7361		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7412		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7503		CERAMIC CHIP 10MF X6S 1608	20%	16V
U	C7315	1-118-671-11	ELECT CHIP 220MF	20%	16V	U	C7362		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7413		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7504		CERAMIC CHIP (22MF)	20%	6.3V
U	C7315	1-120-812-11	ELECT CHIP 220MF	20%	16V	U	C7363		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7414		CERAMIC CHIP 820PF X7R 0603	10%	50V	U	C7505		CERAMIC CHIP (22MF)	20%	6.3V
S	C7316	1-118-660-11	ELECT CHIP 220MF	20%	16V	U	C7364		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7415		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7506		CERAMIC CHIP (22MF)	20%	6.3V
U	C7316	1-118-671-11	ELECT CHIP 220MF	20%	16V	S	C7365	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7416		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7507		CERAMIC CHIP 2.2MF X5R 1005	20%	6.3V
U	C7316	1-120-812-11	ELECT CHIP 220MF	20%	16V	S	C7366	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7417		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7508		CERAMIC CHIP (22MF)	20%	6.3V
U	C7317		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7367	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7418		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7509		CERAMIC CHIP (22MF)	20%	6.3V
U	C7318		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7368	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7419		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7510		CERAMIC CHIP (22MF)	20%	6.3V
U	C7319		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7371	1-118-660-11	ELECT CHIP 220MF	20%	16V	U	C7420		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7511		CERAMIC CHIP (22MF)	20%	6.3V
U	C7320		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7371	1-118-671-11	ELECT CHIP 220MF	20%	16V	U	C7421		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7512		CERAMIC CHIP (22MF)	20%	6.3V
U	C7321		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7371	1-120-812-11	ELECT CHIP 220MF	20%	16V	U	C7422		CERAMIC CHIP 22MF X6S (1709)	20%	6.3V	U	C7513		CERAMIC CHIP (22MF)	20%	6.3V
U	C7322		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7372	1-118-660-11	ELECT CHIP 220MF	20%	16V	S	C7423	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7514		CERAMIC CHIP (22MF)	20%	6.3V
U	C7323		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7372	1-118-671-11	ELECT CHIP 220MF	20%	16V	S	C7424	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7515		CERAMIC CHIP (22MF)	20%	6.3V
U	C7324		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7372	1-120-812-11	ELECT CHIP 220MF	20%	16V	S	C7427	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7516		CERAMIC CHIP (22MF)	20%	6.3V
U	C7325		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V	S	C7373	1-118-660-11	ELECT CHIP 220MF	20%	16V	S	C7428	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7517		CERAMIC CHIP 10UF X5R (1106)	20%	6.3V
U	C7326		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7373	1-118-671-11	ELECT CHIP 220MF	20%	16V	S	C7431	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7518		CERAMIC CHIP 2.2MF X5R 1005	20%	6.3V
U	C7327		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V	U	C7373	1-120-812-11	ELECT CHIP 220MF	20%	16V	S	C7432	1-007-892-11	ELECT CHIP 560MF (7343)	20%	1.8V	U	C7519		CERAMIC CHIP 2.2MF X5R 1005	20%	6.3V
U	C7328		CERAMIC CHIP 10MF X6S 1608	20%	16V	S	C7374	1-118-660-11	ELECT CHIP 220MF	20%	16V	U	C7441		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V	U	C7520		CERAMIC CHIP (22MF)	20%	6.3V
U	C7329		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V	U	C7374	1-118-671-11	ELECT CHIP 220MF	20%	16V	U	C7442		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7521		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C7330		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7374	1-120-812-11	ELECT CHIP 220MF	20%	16V	U	C7443		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7522		CERAMIC CHIP 10UF X5R (1106)	20%	6.3V
U	C7331		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V	U	C7375		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7445		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V	U	C7523		CERAMIC CHIP 4.7UFX5R(1106)	20%	6.3V
U	C7332		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7376		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7447		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7550		CERAMIC CHIP 22MF X5R (2012)	20%	16V
U	C7333		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7377		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7448		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7551		CERAMIC CHIP 22MF X5R (2012)	20%	16V
U	C7334		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7378		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7449		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7552		CERAMIC CHIP 22MF X5R (2012)	20%	16V
U	C7335		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7379		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7450		CERAMIC CHIP 0.01MF X5R (0603)	10%	16V	U	C7553		CERAMIC CHIP 22MF X5R (2012)	20%	16V
U	C7336		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7380		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7452		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V	U	C7554		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V
U	C7337		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V	U	C7381		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7454		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7555		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7338		CERAMIC CHIP 0.22MF X5R 0603	20%	6.3V	U	C7382		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7455		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7556		CERAMIC CHIP 820PF X7R 0603	10%	50V
U	C7339		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7384		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7456		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	S	C7557	1-120-740-11	ELECT CHIP 390MF (6X6)	20%	6.3V
U	C7341		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7386		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7457		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7557	1-120-807-11	ELECT CHIP 390MF (6X6)	20%	6.3V
U	C7342		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7388		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7459		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V	U	C7557	1-122-191-11	ELECT CHIP 390MF (6X6)	20%	6.3V
U	C7343		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7390		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7461		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7559		CERAMIC CHIP 1000PF X7R 0603	10%	50V
U	C7344		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7391		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7462		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V	U	C7561		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7345		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7392		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7464		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V	U	C7562		CERAMIC CHIP 10MF X6S 1608	20%	16V
U	C7346		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7393		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7467		CERAMIC CHIP 0.22MF X5R (0603)	10%	16V	U	C7563		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C7347		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7394		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7469		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V						
U	C7348		CERAMIC CHIP 0.1MF X5R (0603)	10%	16V	U	C7399		CERAMIC CHIP 10MF X6S 1608	20%	16V	U	C7470		CERAMIC CHIP 1.0MF X5R (0603)	20%	10V						





SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark
			< CONNECTOR >																
S	CN3001	1-006-981-11	HDMI CONNECTOR		U	D3625		DI RB751SM-40T2R		U 	F7003	1-523-472-11	FUSE (0435005.KRSC)	5A	S	IC2101	6-901-331-01	IC K4ZAF325BM-SC14	
U	CN3001	1-006-982-11	HDMI CONNECTOR		U	D3626		DI RB751SM-40T2R		U 	F7003	1-523-473-11	FUSE (ERBRD5R00X)	5A	S	IC2101	6-901-747-01	IC H56CBM24MIR-S2CR	
S	CN3501	1-008-389-11	CONNECTOR, FFC/FPC (LIF) 40P		U	D3627		DI RB751SM-40T2R		S 	F7003	1-523-478-11	FUSE (FMC10502WH)	5A	U	IC2101	6-901-331-11	IC K4ZAF325BM-SC14TSO	
U	CN3501	1-008-596-11	CONNECTOR, FFC/FPC (LIF) 40P		S	D4501	6-503-580-01	DI EDZVT2R3.6B		U 	F7501	1-523-472-11	FUSE (0435005.KRSC)	5A	S	IC2102	6-901-457-01	IC MT61K512M32KPA-14C:B	
S	CN3601	1-008-700-11	CONNECTOR, USB 3.1		S	D4502	6-503-580-01	DI EDZVT2R3.6B		U 	F7501	1-523-473-11	FUSE (ERBRD5R00X)	5A	S	IC2102	6-901-331-01	IC K4ZAF325BM-SC14	
										S 	F7501	1-523-478-11	FUSE (FMC10502WH)	5A	S	IC2102	6-901-747-01	IC H56CBM24MIR-S2CR	
U	CN3601	1-008-928-11	CONNECTOR, USB 3.1		S	D4504	6-901-344-01	DI DF2B5M4SL		U 	F7502	1-523-472-11	FUSE (0435005.KRSC)	5A	U	IC2102	6-901-331-11	IC K4ZAF325BM-SC14TSO	
S	CN3603	1-008-700-11	CONNECTOR, USB 3.1		S	D4505	6-901-344-01	DI DF2B5M4SL		U 	F7502	1-523-473-11	FUSE (ERBRD5R00X)	5A	S	IC2201	6-901-457-01	IC MT61K512M32KPA-14C:B	
U	CN3603	1-008-928-11	CONNECTOR, USB 3.1		S	D4506	6-901-344-01	DI DF2B5M4SL		S 	F7502	1-523-478-11	FUSE (FMC10502WH)	5A	S	IC2201	6-901-331-01	IC K4ZAF325BM-SC14	
S	CN4501	1-008-378-11	CONNECTOR PCIE M.2 (M)		S	D4507	6-901-344-01	DI DF2B5M4SL					< FERRITE BEAD >		S	IC2201	6-901-747-01	IC H56CBM24MIR-S2CR	
U	CN4501	1-008-379-11	CONNECTOR PCIE M.2 (M)							S	FB3001	1-481-900-21	INDUCTOR, FERRITE BEADS (1005)	0UH	U	IC2201	6-901-331-11	IC K4ZAF325BM-SC14TSO	
					S	D4508	6-901-344-01	DI DF2B5M4SL		S	FB3002	1-481-900-21	INDUCTOR, FERRITE BEADS (1005)	0UH	S	IC2202	6-901-457-01	IC MT61K512M32KPA-14C:B	
S	CN5101	1-794-509-21	PIN, CONNECTOR (PC BOARD) (3P)		S	D4509	6-901-344-01	DI DF2B5M4SL		S	FB3003	1-481-900-21	INDUCTOR, FERRITE BEADS (1005)	0UH	S	IC2202	6-901-331-01	IC K4ZAF325BM-SC14	
U	CN5102	1-843-455-11	CONNECTOR, FFC/FPC (LIF) 6P		S	D4510	6-901-344-01	DI DF2B5M4SL		S	FB3004	1-481-900-21	INDUCTOR, FERRITE BEADS (1005)	0UH	S	IC2202	6-901-747-01	IC H56CBM24MIR-S2CR	
U	CN5102	1-816-654-61	FFC/FPC CONNECTOR (LIF) 6P		S	D4511	6-901-344-01	DI DF2B5M4SL		S	FB3005	1-481-900-21	INDUCTOR, FERRITE BEADS (1005)	0UH	U	IC2202	6-901-331-11	IC K4ZAF325BM-SC14TSO	
S	CN5102	1-822-787-21	FFC/FPC CONNECTOR (LIF) 6P		S	D4512	6-901-344-01	DI DF2B5M4SL							S	IC2301	6-901-457-01	IC MT61K512M32KPA-14C:B	
U	CN5103	1-843-455-11	CONNECTOR, FFC/FPC (LIF) 6P							S	FB4001	1-008-961-11	EMI FERRITE (SMD) (1005)	0UH	S	IC2301	6-901-331-01	IC K4ZAF325BM-SC14	
					S	D4513	6-901-344-01	DI DF2B5M4SL		S	FB4002	1-400-462-21	FERRITE, EMI (SMD) (1005)	0UH	S	IC2301	6-901-747-01	IC H56CBM24MIR-S2CR	
U	CN5103	1-816-654-61	FFC/FPC CONNECTOR (LIF) 6P		S	D4514	6-901-344-01	DI DF2B5M4SL		S	FB5001	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	U	IC2301	6-901-331-11	IC K4ZAF325BM-SC14TSO	
S	CN5103	1-822-787-21	FFC/FPC CONNECTOR (LIF) 6P		S	D4515	6-901-344-01	DI DF2B5M4SL		S	FB5002	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC2302	6-901-457-01	IC MT61K512M32KPA-14C:B	
S	CN5401	1-764-250-21	PIN, CONNECTOR (PC BOARD) 4P	*	S	D4516	6-901-344-01	DI DF2B5M4SL											
S	CN5402	1-008-388-11	CONNECTOR, FFC/FPC (LIF) 25P	*	S	D4517	6-901-344-01	DI DF2B5M4SL		S	FB5003	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC2302	6-901-331-01	IC K4ZAF325BM-SC14	
U	CN5402	1-008-390-11	CONNECTOR, FFC/FPC (LIF) 25P	*						S	FB5004	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC2302	6-901-747-01	IC H56CBM24MIR-S2CR	
					S	D4518	6-901-344-01	DI DF2B5M4SL		S	FB5005	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	U	IC2302	6-901-331-11	IC K4ZAF325BM-SC14TSO	
S	CN7001	1-004-688-11	CONNECTOR, BOARD TO BOARD 2P		S	D4519	6-901-344-01	DI DF2B5M4SL		S	FB5006	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	U 	IC3001	6-901-147-01	IC MN864739	
S	J5201	1-008-027-11	COAXIAL CONNECTOR (SMT TYPE)		S	D4520	6-504-374-01	DI TPD4E05U06DQAR		S	FB5007	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC3501	6-901-395-01	IC S2MMC01X01	
U	J5201	1-008-834-11	COAXIAL CONNECTOR(SMT TYPE)		S	D5001	6-503-569-01	DI RB751SM-40T2R											
S	J5202	1-008-027-11	COAXIAL CONNECTOR (SMT TYPE)		S	D5002	6-503-569-01	DI RB751SM-40T2R		S	FB5008	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH					
U	J5202	1-008-834-11	COAXIAL CONNECTOR(SMT TYPE)							S	FB5009	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC3502	6-901-396-01	IC TUSB1044IRNQR	
								< FUSE >		S	FB5010	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC3502	6-901-481-01	IC VL181	
S	J5203	1-008-027-11	COAXIAL CONNECTOR (SMT TYPE)		U 	F3501	1-523-472-11	FUSE (0435005.KRSC)	5A	S	FB5011	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC3504	6-901-087-01	IC SIP32419DN-T1GE4-S	
U	J5203	1-008-834-11	COAXIAL CONNECTOR(SMT TYPE)		U 	F3501	1-523-473-11	FUSE (ERBRD5R00X)	5A	S	FB5012	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	U	IC3504	6-901-339-01	IC TCKE700BNL	
S	J5204	1-008-027-11	COAXIAL CONNECTOR (SMT TYPE)		S 	F3501	1-523-478-11	FUSE (FMC10502WH)	5A	S	FB5013	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH	S	IC3505	6-900-977-01	IC AOZ1351DI-01	
U	J5204	1-008-834-11	COAXIAL CONNECTOR(SMT TYPE)		U 	F5401	1-008-781-11	FUSE (043502.5KRSC)	2.5A *										
S	J5301	1-844-549-31	ETHERNET CONNECTOR		U 	F5401	1-523-380-21	FUSE (1005) 2.5A	2.5A *	S	FB5014	1-481-348-21	EMI FERRITE (SMD) (1608)	0UH					
U	J5301	1-844-550-11	ETHERNET CONNECTOR		U 	F5401	1-523-378-11	FUSE, MICRO (1005) 2.5A	2.5A *	S	IC1002	6-900-269-01	IC CXD90060GG		S	IC3602	6-722-334-01	IC BD82044FVJ-GE2	
U	J5301	1-844-551-11	ETHERNET CONNECTOR		U 	F5402	1-008-781-11	FUSE (043502.5KRSC)	2.5A *	S	IC2001	6-901-457-01	IC MT61K512M32KPA-14C:B		U	IC3602	6-721-630-11	IC TP52001DDGKR	
					U 	F5402	1-523-380-21	FUSE (1005) 2.5A	2.5A *						S	IC3603	6-722-334-01	IC BD82044FVJ-GE2	
			< DIODE >		U 	F5402	1-523-378-11	FUSE, MICRO (1005) 2.5A	2.5A *	S	IC2001	6-901-331-01	IC K4ZAF325BM-SC14		U	IC3603	6-721-630-11	IC TP52001DDGKR	
U	D3001		DIODE 1SS352-TPH3		U 	F7001	1-523-472-11	FUSE (0435005.KRSC)	5A	S	IC2001	6-901-747-01	IC H56CBM24MIR-S2CR		S	IC3604	6-722-334-01	IC BD82044FVJ-GE2	
S	D3003	6-503-646-01	DI CDZVT2R5.6B							U	IC2001	6-901-331-11	IC K4ZAF325BM-SC14TSO						
S	D3004	6-503-646-01	DI CDZVT2R5.6B		U 	F7001	1-523-473-11	FUSE (ERBRD5R00X)	5A						U	IC3604	6-721-630-11	IC TP52001DDGKR	
S	D3005	6-503-646-01	DI CDZVT2R5.6B		S 	F7001	1-523-478-11	FUSE (FMC10502WH)	5A	S	IC2002	6-901-457-01	IC MT61K512M32KPA-14C:B		S	IC4001	6-901-353-01	IC CXD90062GG	
S	D3006	6-503-646-01	DI CDZVT2R5.6B		U 	F7002	1-523-472-11	FUSE (0435005.KRSC)	5A	S	IC2002	6-901-331-01	IC K4ZAF325BM-SC14		U	IC4101	6-901-469-01	IC H5AN4G8NBJR-UHCR	
					U 	F7002	1-523-473-11	FUSE (ERBRD5R00X)	5A	S	IC2002	6-901-747-01	IC H56CBM24MIR-S2CR		S	IC4101	6-901-392-01	IC K4A4G085WF-BCTD	
S	D3603	6-503-569-01	DI RB751SM-40T2R		S 	F7002	1-523-478-11	FUSE (FMC10502WH)	5A	U	IC2002	6-901-331-11	IC K4ZAF325BM-SC14TSO		U	IC4101	6-901-470-01	IC NT5AD512M8D3-HR	
S	D3604	6-503-569-01	DI RB751SM-40T2R							S	IC2101	6-901-457-01	IC MT61K512M32KPA-14C:B						
S	D3611	6-503-569-01	DI RB751SM-40T2R												S	IC4201	6-901-424-01	IC K9BKGD8J1A-TCB0	
S	D3619	6-900-481-01	DI ESD7104MUTAG												S	IC4201	6-901-465-01	IC TH58LJT0T24BA4M	
S	D3624	6-900-481-01	DI ESD7104MUTAG												S	IC4201	6-901-839-01	IC SDQCIBMB-128G-G704	
															S	IC4202	6-901-424-01	IC K9BKGD8J1A-TCB0	
															S	IC4202	6-901-465-01	IC TH58LJT0T24BA4M	

SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark
S	IC4202	6-901-839-01	IC SDQCIBMB-128G-G704		S	IC7106	6-721-030-01	IC MM3526A33NRE		S	IC7309	6-901-449-01	IC SIC649ACD-T1-GE3-S		S	L7502	1-460-906-11	CHOKE COIL 0.47UH (2520)	
S	IC4203	6-901-424-01	IC K9BKGD8J1A-TCB0		U	IC7106	6-901-355-01	IC TLV75533PDBVR		U	IC7501	6-901-419-01	IC DA9081-A4AT2		S	L7503	1-481-992-11	INDUCTOR 1UH (2520)	
S	IC4203	6-901-465-01	IC TH58LJT0T24BA4M		U	IC7107	6-723-084-11	IC MM3736BRLE		S	IC7501	6-901-418-01	IC RT5127GQW		S	L7504	1-460-673-11	CHOKE COIL 1.0UH(ML 2520)	
S	IC4203	6-901-839-01	IC SDQCIBMB-128G-G704		S	IC7107	6-722-323-01	IC TPS53219ARGTR		U	IC7550	6-723-084-11	IC MM3736BRLE		S	L7550	1-460-572-11	CHOKE COIL 2.2UH	
S	IC4204	6-901-424-01	IC K9BKGD8J1A-TCB0		U	IC7108	6-720-969-01	IC RT8237FZQW		S	IC7550	6-722-323-01	IC TPS53219ARGTR						
																		< TRANSISTOR >	
S	IC4204	6-901-465-01	IC TH58LJT0T24BA4M		S	IC7108	6-719-042-11	IC TPS51218DSCR					< COIL >		S	Q3501	6-553-837-01	TR SI3493DDV-T1-GE3	
S	IC4204	6-901-839-01	IC SDQCIBMB-128G-G704		U	IC7109	6-720-969-01	IC RT8237FZQW		S	L3001	1-007-492-11	COMMON MODE CHOKE COIL		S	Q3502	6-552-949-01	TR DTC044EUBTL	
S	IC4205	6-901-424-01	IC K9BKGD8J1A-TCB0		S	IC7109	6-719-042-11	IC TPS51218DSCR		S	L3002	1-007-492-11	COMMON MODE CHOKE COIL		S	Q3503	6-553-482-01	TR SSM3J56MFV	
S	IC4205	6-901-465-01	IC TH58LJT0T24BA4M		U	IC7110	6-720-969-01	IC RT8237FZQW		S	L3003	1-007-492-11	COMMON MODE CHOKE COIL		S	Q3504	6-552-949-01	TR DTC044EUBTL	
S	IC4205	6-901-839-01	IC SDQCIBMB-128G-G704		S	IC7110	6-719-042-11	IC TPS51218DSCR		S	L3004	1-007-492-11	COMMON MODE CHOKE COIL		S	Q3601	6-552-948-01	TR DTC043ZUBTL	
										S	L3502	1-460-879-11	COMMON MODE CHOKE COIL						
S	IC4206	6-901-424-01	IC K9BKGD8J1A-TCB0		S	IC7111	6-720-829-01	IC MM3504A00RRE							S	Q3602	6-552-948-01	TR DTC043ZUBTL	
S	IC4206	6-901-465-01	IC TH58LJT0T24BA4M		U	IC7113	6-722-447-01	IC MP9145GQ-C647-Z		S	L3503	1-460-879-11	COMMON MODE CHOKE COIL		S	Q3603	6-552-948-01	TR DTC043ZUBTL	
S	IC4206	6-901-839-01	IC SDQCIBMB-128G-G704		S	IC7113	6-720-856-01	IC TLV62090RGTR		S	L3504	1-460-879-11	COMMON MODE CHOKE COIL		S	Q3604	6-552-934-01	TR DTA044EUBTL	
S	IC5001	6-901-409-01	IC W25Q16JVSNIM		S	IC7301	6-901-245-01	IC XDPE14286A-SY01		S	L3601	1-460-878-11	COMMON MODE CHOKE COIL		S	Q3605	6-552-949-01	TR DTC044EUBTL	
S	IC5006	6-901-337-01	IC CXD90061GG		S	IC7302	6-901-450-01	IC AOZ5612BQI		S	L3605	1-460-878-11	COMMON MODE CHOKE COIL		S	Q5101	6-552-949-01	TR DTC044EUBTL	
										S	L7001	1-460-741-11	COIL, CHOKE 1.0UH						
S	IC5101	6-901-387-01	IC SLS 52ASAC6 VQFN32		S	IC7302	6-901-115-01	IC NCP252160MNTWG							S	Q5102	6-553-482-01	TR SSM3J56MFV	
S	IC5203	1-008-770-11	WLAN/BT MODULE J20H100		U	IC7302	6-901-115-11	IC NCP252160MNTWG		S	L7005	1-481-992-11	INDUCTOR 1UH (2520)		S	Q5403	6-552-949-01	TR DTC044EUBTL	*
U	IC7001	6-723-084-11	IC MM3736BRLE		S	IC7302	6-901-449-01	IC SIC649ACD-T1-GE3-S		S	L7006	1-460-673-11	CHOKE COIL 1.0UH(ML 2520)		S	Q5404	6-553-837-01	TR SI3493DDV-T1-GE3	*
S	IC7001	6-722-323-01	IC TPS53219ARGTR		S	IC7303	6-901-450-01	IC AOZ5612BQI		S	L7007	1-460-673-11	CHOKE COIL 1.0UH(ML 2520)		S	Q7001	6-553-647-01	TR SIRA18DP-T1-GE3	
S	IC7002	6-901-085-01	IC DA9065-C3AU2		S	IC7303	6-901-115-01	IC NCP252160MNTWG		S	L7008	1-457-814-11	CHOKE COIL 1.0UH		S	Q7001	6-553-702-01	TR RS1E130GNTB	
										S	L7012	1-481-992-11	INDUCTOR 1UH (2520)						
U	IC7002	6-901-338-01	IC RT5126GQW		U	IC7303	6-901-115-11	IC NCP252160MNTWG							S	Q7001	6-553-704-11	TR AON6414A	
U	IC7003	6-722-447-01	IC MP9145GQ-C647-Z		S	IC7303	6-901-449-01	IC SIC649ACD-T1-GE3-S		S	L7013	1-481-992-11	INDUCTOR 1UH (2520)		S	Q7002	6-553-648-11	TR SIRA06DP-T1-GE3	
S	IC7003	6-720-856-01	IC TLV62090RGTR		S	IC7304	6-901-450-01	IC AOZ5612BQI		S	L7101	1-460-741-11	COIL, CHOKE 1.0UH		S	Q7002	6-553-673-01	TR RS1E280GNTB	
U	IC7006	6-722-447-01	IC MP9145GQ-C647-Z		S	IC7304	6-901-115-01	IC NCP252160MNTWG		S	L7103	1-460-673-11	CHOKE COIL 1.0UH(ML 2520)		S	Q7002	6-900-432-01	TR AON6314	
S	IC7006	6-720-856-01	IC TLV62090RGTR		U	IC7304	6-901-115-11	IC NCP252160MNTWG		S	L7104	1-460-896-11	CHOKE COIL 1.5UH		S	Q7005	6-551-622-01	TR 2SC6026MFV(TL35	
										S	L7110	1-008-615-11	COIL, CHOKE 0.22UH						
U	IC7007	6-722-447-01	IC MP9145GQ-C647-Z		S	IC7304	6-901-449-01	IC SIC649ACD-T1-GE3-S							S	Q7006	6-552-934-01	TR DTA044EUBTL	
S	IC7007	6-720-856-01	IC TLV62090RGTR		S	IC7305	6-901-450-01	IC AOZ5612BQI		S	L7111	1-008-615-11	COIL, CHOKE 0.22UH		S	Q7103	6-553-647-01	TR SIRA18DP-T1-GE3	
U	IC7008	6-901-433-01	IC MM4009ANRE		S	IC7305	6-901-115-01	IC NCP252160MNTWG		S	L7112	1-008-615-11	COIL, CHOKE 0.22UH		S	Q7103	6-553-702-01	TR RS1E130GNTB	
S	IC7008	6-723-555-01	IC TPS2553DDBVR		U	IC7305	6-901-115-11	IC NCP252160MNTWG		S	L7114	1-481-992-11	INDUCTOR 1UH (2520)		S	Q7103	6-553-704-11	TR AON6414A	
S	IC7009	6-722-334-01	IC BD82044FVJ-GE2		S	IC7305	6-901-449-01	IC SIC649ACD-T1-GE3-S		S	L7301	1-460-741-11	COIL, CHOKE 1.0UH		S	Q7104	6-553-648-11	TR SIRA06DP-T1-GE3	
										S	L7302	1-008-615-11	COIL, CHOKE 0.22UH						
U	IC7009	6-721-630-11	IC TPS2001DDGKR		S	IC7306	6-901-450-01	IC AOZ5612BQI							S	Q7104	6-553-673-01	TR RS1E280GNTB	
S	IC7010	6-720-829-01	IC MM3504A00RRE		S	IC7306	6-901-115-01	IC NCP252160MNTWG		S	L7303	1-460-677-11	COIL, CHOKE 0.18UH		S	Q7104	6-900-432-01	TR AON6314	
S	IC7011	6-719-263-01	IC MM3411A18NRE		U	IC7306	6-901-115-11	IC NCP252160MNTWG		S	L7304	1-460-677-11	COIL, CHOKE 0.18UH		S	Q7106	6-552-621-01	TR SSM3K37MFV,L3SOF	
U	IC7011	6-901-436-01	IC TLV74318PDBVR		S	IC7306	6-901-449-01	IC SIC649ACD-T1-GE3-S		S	L7305	1-008-588-11	CHOKE COIL 0.24UH		S	Q7107	6-552-621-01	TR SSM3K37MFV,L3SOF	
S	IC7012	6-719-255-01	IC MM3411A09NRE		S	IC7307	6-901-450-01	IC AOZ5612BQI		S	L7306	1-008-588-11	CHOKE COIL 0.24UH		S	Q7108	6-900-753-01	TR BSG0812ND	
										S	L7307	1-008-588-11	CHOKE COIL 0.24UH						
U	IC7012	6-901-437-01	IC TLV75509PDBVR		S	IC7307	6-901-115-01	IC NCP252160MNTWG							S	Q7109	6-900-753-01	TR BSG0812ND	
U	IC7101	6-900-562-01	IC RT5784ALGQWF		U	IC7307	6-901-115-11	IC NCP252160MNTWG		S	L7308	1-008-588-11	CHOKE COIL 0.24UH		S	Q7110	6-900-753-01	TR BSG0812ND	
S	IC7101	6-900-742-01	IC TPS62822DLCR		S	IC7307	6-901-449-01	IC SIC649ACD-T1-GE3-S		S	L7309	1-008-588-11	CHOKE COIL 0.24UH		S	Q7301	6-553-482-01	TR SSM3J56MFV	
S	IC7102	6-720-829-01	IC MM3504A00RRE		S	IC7308	6-901-450-01	IC AOZ5612BQI		S	L7310	1-008-588-11	CHOKE COIL 0.24UH		S	Q7302	6-552-949-01	TR DTC044EUBTL	
S	IC7103	6-720-829-01	IC MM3504A00RRE		S	IC7308	6-901-115-01	IC NCP252160MNTWG		S	L7313	1-008-588-11	CHOKE COIL 0.24UH		S	Q7550	6-553-638-21	TR SI2342DT-T1-GE3	
										S	L7314	1-008-588-11	CHOKE COIL 0.24UH						
S	IC7104	6-719-430-01	IC MM3411A33NRE		U	IC7308	6-901-115-11	IC NCP252160MNTWG										< RESISTOR >	
U	IC7104	6-900-382-01	IC TLV74333PDBVR		S	IC7308	6-901-449-01	IC SIC649ACD-T1-GE3-S		S	L7315	1-008-588-11	CHOKE COIL 0.24UH		U	R1023	METAL CHIP 200(1005)	1%	1/16W
S	IC7105	6-721-719-01	IC MM3526A18NRE		S	IC7309	6-901-450-01	IC AOZ5612BQI		S	L7316	1-008-588-11	CHOKE COIL 0.24UH		U	R1024	METAL CHIP 200(1006)	1%	1/16W
U	IC7105	6-721-719-11	IC MM3526A18NRH		S	IC7309	6-901-115-01	IC NCP252160MNTWG		S	L7317	1-008-588-11	CHOKE COIL 0.24UH		U	R1025	METAL CHIP 200(1007)	1%	1/16W
U	IC7105	6-900-383-01	IC TLV75518PDBVR		U	IC7309	6-901-115-11	IC NCP252160MNTWG		S	L7318	1-008-588-11	CHOKE COIL 0.24UH		U	R1026	METAL CHIP 200(1008)	1%	1/16W
										S	L7501	1-460-673-11	CHOKE COIL 1.0UH(ML 2520)		U	R1027	METAL CHIP 200(1009)	1%	1/16W

SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark	SC	Ref. No.	Part No.	Description	Remark
U	R1028		METAL CHIP 200(1010)	1% 1/16W	U	R2302		METAL CHIP 5.49K(1005)	1% 1/16W	U	R4001		METAL CHIP 22(1608)	5% 1/16W	U	R4126		METAL CHIP 49.9(1005)	1% 1/16W
U	R1029		METAL CHIP 200(1011)	1% 1/16W	U	R2303		METAL CHIP 120(1005)	1% 1/16W	U	R4002		METAL CHIP 22(1608)	5% 1/16W	U	R4127		METAL CHIP 49.9(1005)	1% 1/16W
U	R1036		METAL CHIP 200(1012)	1% 1/16W	U	R2306		METAL CHIP 120(1005)	1% 1/16W	U	R4004		METAL CHIP 6.04K(1005)	1% 1/16W	U	R4128		METAL CHIP 49.9(1005)	1% 1/16W
U	R1037		METAL CHIP 4.99K(1005)	1% 1/16W	U	R2307		METAL CHIP 2.37K(1005)	1% 1/16W	U	R4007		METAL CHIP 1.0K(1005)	1% 1/16W	U	R4129		METAL CHIP 240(1005)	1% 1/16W
U	R1038		METAL CHIP 120(1005)	1% 1/16W	U	R2308		METAL CHIP 5.49K(1005)	1% 1/16W	U	R4008		METAL CHIP 1.0K(1005)	1% 1/16W	U	R4130		METAL CHIP 49.9(1005)	1% 1/16W
U	R1039		METAL CHIP 4.99K(1005)	1% 1/16W	U	R2310		METAL CHIP 120(1005)	1% 1/16W	U	R4012		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4201		METAL CHIP 1.0K(1005)	1% 1/16W
U	R1041		METAL CHIP 4.99K(1005)	1% 1/16W	U	R2313		METAL CHIP 120(1005)	1% 1/16W	U	R4022		METAL CHIP 120(1005)	1% 1/16W	U	R4202		METAL CHIP 1.0K(1005)	1% 1/16W
U	R1043		METAL CHIP 4.99K(1005)	1% 1/16W	U	R2415		METAL CHIP 2.37K(1005)	1% 1/16W	U	R4049		METAL CHIP 1.0K (1005)	5% 1/16W	U	R4203		METAL CHIP 1.0K(1005)	1% 1/16W
U	R1044		METAL CHIP 4.99K(1005)	1% 1/16W	U	R2416		METAL CHIP 5.49K(1005)	1% 1/16W	U	R4050		METAL CHIP 1.0K (1005)	5% 1/16W	U	R4204		METAL CHIP 1.0K(1005)	1% 1/16W
U	R1045		METAL CHIP 4.99K(1005)	1% 1/16W	U	R3018		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4051		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4205		METAL CHIP 10K (1005)	5% 1/16W
U	R1048		METAL CHIP 4.99K(1005)	1% 1/16W	U	R3020		METAL CHIP 6.8K(1005)	1% 1/16W	U	R4052		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4206		METAL CHIP 10K (1005)	5% 1/16W
U	R1049		METAL CHIP 4.99K(1005)	1% 1/16W	U	R3022		METAL CHIP 27K (1005)	5% 1/16W	U	R4055		METAL CHIP 120(1005)	1% 1/16W	U	R4207		METAL CHIP 4.7K (1005)	5% 1/16W
U	R1050		METAL CHIP 120(1005)	1% 1/16W	U	R3023		METAL CHIP 1.8K (1005)	5% 1/16W	U	R4056		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4209		METAL CHIP 4.7K (1005)	5% 1/16W
U	R1053		METAL CHIP 4.7K (1005)	5% 1/16W	U	R3024		METAL CHIP 1.8K (1005)	5% 1/16W	U	R4064		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4211		METAL CHIP 4.7K (1005)	5% 1/16W
U	R1064		METAL CHIP 2.2K (1005)	5% 1/16W	U	R3028		METAL CHIP 22(1608)	5% 1/16W	U	R4065		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4213		METAL CHIP 4.7K (1005)	5% 1/16W
U	R1065		METAL CHIP 2.2K (1005)	5% 1/16W	U	R3501		METAL CHIP 10K (1005)	5% 1/16W	U	R4067		METAL CHIP 2.2K (1005)	5% 1/16W	U	R4215		METAL CHIP 300(1005)	1% 1/16W
U	R1066		METAL CHIP 4.7K (1005)	5% 1/16W	U	R3506		METAL CHIP 10K (1005)	5% 1/16W	U	R4068		METAL CHIP 2.2K (1005)	5% 1/16W	U	R4216		METAL CHIP 300(1005)	1% 1/16W
U	R1903		METAL CHIP 1.0K (1005)	5% 1/16W	U	R3508		METAL CHIP 10K (1005)	5% 1/16W	U	R4069		METAL CHIP 1.0K (1005)	5% 1/16W	U	R4217		METAL CHIP 300(1005)	1% 1/16W
U	R1904		METAL CHIP 1.0K (1005)	5% 1/16W	U	R3521		METAL CHIP 1.5K(1005)	1% 1/16W	U	R4070		METAL CHIP 1.0K (1005)	5% 1/16W	U	R4218		METAL CHIP 300(1005)	1% 1/16W
U	R1905		METAL CHIP 1.0K (1005)	5% 1/16W	U	R3523		METAL CHIP 100K (1005)	5% 1/16W	U	R4081		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4219		METAL CHIP 10K (1005)	5% 1/16W
U	R1907		METAL CHIP 1.0K (1005)	5% 1/16W	U	R3524		METAL CHIP 10K (1005)	5% 1/16W	U	R4101		METAL CHIP 49.9(1005)	1% 1/16W	U	R4220		METAL CHIP 10K (1005)	5% 1/16W
U	R1908		METAL CHIP 1.0K (1005)	5% 1/16W	U	R3529		METAL CHIP 2.0K(1005)	1% 1/16W	U	R4102		METAL CHIP 49.9(1005)	1% 1/16W	U	R4221		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2001		METAL CHIP 2.37K(1005)	1% 1/16W	U	R3537		METAL CHIP 10K (1005)	5% 1/16W	U	R4103		METAL CHIP 49.9(1005)	1% 1/16W	U	R4223		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2002		METAL CHIP 5.49K(1005)	1% 1/16W	U	R3549		METAL CHIP 20K (1005)	1% 1/16W	U	R4104		METAL CHIP 49.9(1005)	1% 1/16W	U	R4225		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2003		METAL CHIP 120(1005)	1% 1/16W	U	R3550		METAL CHIP 3.6K (1005)	1% 1/16W	U	R4105		METAL CHIP 49.9(1005)	1% 1/16W	U	R4227		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2006		METAL CHIP 120(1005)	1% 1/16W	U	R3554		METAL CHIP 82K (1005)	1% 1/16W	U	R4106		METAL CHIP 49.9(1005)	1% 1/16W	U	R4229		METAL CHIP 300(1005)	1% 1/16W
U	R2009		METAL CHIP 120(1005)	1% 1/16W	U	R3555		METAL CHIP 47K (1005)	1% 1/16W	U	R4107		METAL CHIP 49.9(1005)	1% 1/16W	U	R4230		METAL CHIP 300(1005)	1% 1/16W
U	R2012		METAL CHIP 120(1005)	1% 1/16W	U	R3556		METAL CHIP 3.3K (1005)	5% 1/16W	U	R4108		METAL CHIP 49.9(1005)	1% 1/16W	U	R4231		METAL CHIP 300(1005)	1% 1/16W
U	R2101		METAL CHIP 2.37K(1005)	1% 1/16W	U	R3561		METAL CHIP 4.7K (1005)	5% 1/16W	U	R4109		METAL CHIP 49.9(1005)	1% 1/16W	U	R4232		METAL CHIP 300(1005)	1% 1/16W
U	R2102		METAL CHIP 5.49K(1005)	1% 1/16W	U	R3562		METAL CHIP 2.2K (1005)	5% 1/16W	U	R4110		METAL CHIP 49.9(1005)	1% 1/16W	U	R4233		METAL CHIP 10K (1005)	5% 1/16W
U	R2103		METAL CHIP 120(1005)	1% 1/16W	U	R3563		METAL CHIP 2.2K (1005)	5% 1/16W	U	R4111		METAL CHIP 49.9(1005)	1% 1/16W	U	R4234		METAL CHIP 10K (1005)	5% 1/16W
U	R2106		METAL CHIP 120(1005)	1% 1/16W	U	R3566		METAL CHIP 3.3K (1005)	5% 1/16W	U	R4112		METAL CHIP 49.9(1005)	1% 1/16W	U	R4235		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2107		METAL CHIP 2.37K(1005)	1% 1/16W	U	R3567		METAL CHIP 3.3K (1005)	5% 1/16W	U	R4113		METAL CHIP 49.9(1005)	1% 1/16W	U	R4237		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2108		METAL CHIP 5.49K(1005)	1% 1/16W	U	R3617		METAL CHIP 10K (1005)	5% 1/16W	U	R4114		METAL CHIP 49.9(1005)	1% 1/16W	U	R4239		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2109		METAL CHIP 120(1005)	1% 1/16W	U	R3618		METAL CHIP 10K (1005)	5% 1/16W	U	R4115		METAL CHIP 49.9(1005)	1% 1/16W	U	R4241		METAL CHIP 4.7K (1005)	5% 1/16W
U	R2112		METAL CHIP 120(1005)	1% 1/16W	U	R3619		METAL CHIP 10K (1005)	5% 1/16W	U	R4116		METAL CHIP 49.9(1005)	1% 1/16W	U	R4243		METAL CHIP 300(1005)	1% 1/16W
U	R2201		METAL CHIP 2.37K(1005)	1% 1/16W	U	R3620		METAL CHIP 10K (1005)	5% 1/16W	U	R4117		METAL CHIP 49.9(1005)	1% 1/16W	U	R4244		METAL CHIP 300(1005)	1% 1/16W
U	R2202		METAL CHIP 5.49K(1005)	1% 1/16W	U	R3621		METAL CHIP 100K (1005)	5% 1/16W	U	R4118		METAL CHIP 49.9(1005)	1% 1/16W	U	R4245		METAL CHIP 300(1005)	1% 1/16W
U	R2203		METAL CHIP 120(1005)	1% 1/16W	U	R3622		METAL CHIP 100K (1005)	5% 1/16W	U	R4119		METAL CHIP 1.0K(1005)	1% 1/16W	U	R4246		METAL CHIP 300(1005)	1% 1/16W
U	R2206		METAL CHIP 120(1005)	1% 1/16W	U	R3623		METAL CHIP 1.0K (1005)	5% 1/16W	U	R4120		METAL CHIP 1.0K(1005)	1% 1/16W	U	R4503		METAL CHIP 100 (1005)	5% 1/16W
U	R2207		METAL CHIP 2.37K(1005)	1% 1/16W	U	R3624		METAL CHIP 1.0K (1005)	5% 1/16W	U	R4121		METAL CHIP 49.9(1005)	1% 1/16W	U	R4504		METAL CHIP 100 (1005)	5% 1/16W
U	R2208		METAL CHIP 5.49K(1005)	1% 1/16W	U	R3627		METAL CHIP 10K (1005)	5% 1/16W	U	R4122		METAL CHIP 49.9(1005)	1% 1/16W	U	R5007		METAL CHIP 1.0K (1005)	5% 1/16W
U	R2209		METAL CHIP 120(1005)	1% 1/16W	U	R3628		METAL CHIP 10K (1005)	5% 1/16W	U	R4123		METAL CHIP 49.9(1005)	1% 1/16W	U	R5022		METAL CHIP 2.2K (1005)	5% 1/16W
U	R2212		METAL CHIP 120(1005)	1% 1/16W	U	R3629		METAL CHIP 100K (1005)	5% 1/16W	U	R4124		METAL CHIP 49.9(1005)	1% 1/16W	U	R5026		METAL CHIP 2.2K (1005)	5% 1/16W
U	R2301		METAL CHIP 2.37K(1005)	1% 1/16W	U	R3630		METAL CHIP 1.0K (1005)	5% 1/16W	U	R4125		METAL CHIP 49.9(1005)	1% 1/16W	U	R5029		METAL CHIP 4.7K (1005)	5% 1/16W

SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark		SC	Ref. No.	Part No.	Description	Remark	
U	R5036		METAL CHIP 24K(1005)	1%	1/16W	U	R5303		METAL CHIP 75K (1005)	5%	1/16W	U	R7121		METAL CHIP 200K (1005)	1%	1/16W
U	R5037		METAL CHIP 560 (1005)	5%	1/16W	U	R5304		METAL CHIP 75K (1005)	5%	1/16W	U	R7122		METAL CHIP 100K (1005)	1%	1/16W
U	R5055		METAL CHIP 33 (1608)	5%	1/16W	U	R5403		METAL CHIP 100K (1005)	5%	1/16W *	U	R7123		METAL CHIP 6.8 (1608)	5%	1/10W
U	R5056		METAL CHIP 33 (1608)	5%	1/16W	U	R5404		METAL CHIP 68K (1005)	5%	1/16W *	U	R7124		METAL CHIP 240 (1005)	1%	1/16W
U	R5058		METAL CHIP 47 (1005)	5%	1/16W	U	R5406		METAL CHIP 100K (1005)	5%	1/16W *	U	R7125		METAL CHIP 360 (1005)	1%	1/16W
U	R5060		METAL CHIP 47 (1005)	5%	1/16W	U	R5407		METAL CHIP 100K (1005)	5%	1/16W *	U	R7126		METAL CHIP 3.9K (1005)	1%	1/16W
U	R5061		METAL CHIP 22 (1608)	5%	1/16W	U	R7002		METAL CHIP 220K(1005)	1%	1/16W	U	R7127		METAL CHIP 240 (1005)	1%	1/16W
U	R5063		METAL CHIP 10K (1005)	5%	1/16W	U	R7003		METAL CHIP 47K(1005)	1%	1/16W	U	R7128		METAL CHIP 360 (1005)	1%	1/16W
U	R5064		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7004		METAL CHIP 6.2K(1005)	1%	1/16W	U	R7129		METAL CHIP 3.9K (1005)	1%	1/16W
U	R5066		METAL CHIP 10K (1005)	5%	1/16W	U	R7005		METAL CHIP 75K(1005)	1%	1/16W	U	R7130		METAL CHIP 5.6 (1608)	5%	1/10W
U	R5067		METAL CHIP 47 (1005)	5%	1/16W	U	R7006		METAL CHIP 11K(1005)	1%	1/16W	U	R7132		METAL CHIP 1 (1608)	5%	1/10W
U	R5068		METAL CHIP 47 (1005)	5%	1/16W	U	R7009		METAL CHIP 33K(1005)	1%	1/16W	U	R7140		METAL CHIP 1.5K (1005)	1%	1/16W
U	R5069		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7014		METAL CHIP 100K(1005)	5%	1/16W	U	R7141		METAL CHIP 3.9K (1005)	1%	1/16W
U	R5070		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7019		METAL CHIP 10K (1005)	5%	1/16W	U	R7142		METAL CHIP 4.7K (1005)	1%	1/16W
U	R5074		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7021		METAL CHIP 6.8(1608)	5%	1/10W	U	R7143		METAL CHIP 6.8K (1005)	1%	1/16W
U	R5077		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7022		METAL CHIP 51K (1005)	5%	1/16W	U	R7144		METAL CHIP 12K (1005)	1%	1/16W
U	R5078		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7023		METAL CHIP 5.6(1608)	5%	1/10W	U	R7145		METAL CHIP 5.6K (1005)	1%	1/16W
U	R5086		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7024		METAL CHIP 150K(1005)	1%	1/16W	U	R7146		METAL CHIP 20K (1005)	1%	1/16W
U	R5092		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7025		METAL CHIP 220K(1005)	1%	1/16W	U	R7153		METAL CHIP 10K (1005)	5%	1/16W
U	R5101		METAL CHIP 1.0K (1005)	5%	1/16W	U	R7026		METAL CHIP 1.8K(1005)	1%	1/16W	U	R7156		METAL CHIP 10K (1005)	5%	1/16W
U	R5103		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7029		METAL CHIP 100K (1005)	5%	1/16W	U	R7157		METAL CHIP 330 (1005)	1%	1/16W
U	R5104		METAL CHIP 10K (1005)	5%	1/16W	U	R7031		METAL CHIP 1(1608)	5%	1/10W	U	R7158		METAL CHIP 2.7K (1005)	1%	1/16W
U	R5108		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7050		METAL CHIP 100K (1005)	5%	1/16W	U	R7159		METAL CHIP 15K (1005)	1%	1/16W
U	R5109		METAL CHIP 1.2K (1005)	5%	1/16W	U	R7051		METAL CHIP 100K (1005)	5%	1/16W	U	R7161		METAL CHIP 3.9K (1005)	1%	1/16W
U	R5110		METAL CHIP 1.2K (1005)	5%	1/16W	U	R7052		METAL CHIP 51K (1005)	5%	1/16W	U	R7162		METAL CHIP 10K (1005)	1%	1/16W
U	R5111		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7053		METAL CHIP 51K (1005)	5%	1/16W	U	R7163		METAL CHIP 15K(1005)	1%	1/16W
U	R5112		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7057		METAL CHIP 150K(1005)	1%	1/16W	U	R7170		METAL CHIP 33K(1005)	1%	1/16W
U	R5113		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7058		METAL CHIP 160K(1005)	1%	1/16W	U	R7172		METAL CHIP 33K(1005)	1%	1/16W
U	R5114		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7059		METAL CHIP 470K(1005)	1%	1/16W	U	R7174		METAL CHIP 33K(1005)	1%	1/16W
U	R5125		METAL CHIP 120 (1005)	5%	1/16W	U	R7060		METAL CHIP 200K(1005)	1%	1/16W	U	R7178		METAL CHIP 27K(1005)	1%	1/16W
U	R5126		METAL CHIP 6.8K(1005)	1%	1/16W	U	R7072		METAL CHIP 100K (1005)	5%	1/16W	U	R7179		METAL CHIP 27K(1005)	1%	1/16W
U	R5133		METAL CHIP 6.8K(1005)	1%	1/16W	U	R7075		METAL CHIP 100K (1005)	5%	1/16W	U	R7180		METAL CHIP 27K(1005)	1%	1/16W
U	R5144		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7078		METAL CHIP 100K (1005)	5%	1/16W	U	R7182		METAL CHIP 1(1608)	5%	1/10W
U	R5145		METAL CHIP 4.7K (1005)	5%	1/16W	U	R7081		METAL CHIP 100K (1005)	5%	1/16W	U	R7183		METAL CHIP 1(1608)	5%	1/10W
U	R5146		METAL CHIP 560 (1005)	5%	1/16W *	U	R7084		METAL CHIP 68K (1005)	1%	1/16W	U	R7184		METAL CHIP 1(1608)	5%	1/10W
U	R5149		METAL CHIP 100K (1005)	5%	1/16W												
U	R5151		METAL CHIP 270K (1005)	5%	1/16W	U	R7087		METAL CHIP 1.5K(1005)	1%	1/16W	U	R7186		METAL CHIP 2.2(1608)	5%	1/10W
U	R5152		METAL CHIP 20K(1005)	1%	1/16W	U	R7088		METAL CHIP 3.9K(1005)	1%	1/16W	U	R7187		METAL CHIP 2.2 (1005)	5%	1/16W
U	R5153		METAL CHIP 10K(1005)	1%	1/16W	U	R7089		METAL CHIP 18K(1005)	1%	1/16W	U	R7188		METAL CHIP 2.2(1608)	5%	1/10W
U	R5156		METAL CHIP 6.8K(1005)	1%	1/16W	U	R7101		METAL CHIP 10K (1005)	5%	1/16W	U	R7189		METAL CHIP 2.2 (1005)	5%	1/16W
						U	R7107		METAL CHIP 3.0K(1005)	1%	1/16W	U	R7190		METAL CHIP 2.2(1608)	5%	1/10W
U	R5159		METAL CHIP 100 (1005)	5%	1/16W												
U	R5161		METAL CHIP 22(1608)	5%	1/16W	U	R7108		METAL CHIP 82K(1005)	1%	1/16W	U	R7191		METAL CHIP 2.2 (1005)	5%	1/16W
U	R5162		METAL CHIP 22(1608)	5%	1/16W	U	R7109		METAL CHIP 11K(1005)	1%	1/16W	U	R7193		METAL CHIP 1(1608)	5%	1/10W
U	R5301		METAL CHIP 75K (1005)	5%	1/16W	U	R7111		METAL CHIP 20K(1005)	1%	1/16W	U	R7194		METAL CHIP 1(1608)	5%	1/10W
U	R5302		METAL CHIP 75K (1005)	5%	1/16W	U	R7112		METAL CHIP 100K (1005)	5%	1/16W	U	R7195		METAL CHIP 1(1608)	5%	1/10W
						U	R7118		METAL CHIP 100K (1005)	5%	1/16W	U	R7211		METAL CHIP 2.2K(1005)	1%	1/16W

SC	Ref. No.	Part No.	Description	Remark	
U	R7398		METAL CHIP 1(1608)	5%	1/10W
U	R7399		METAL CHIP 1(1608)	5%	1/10W
U	R7400		METAL CHIP 1(1608)	5%	1/10W
U	R7413		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7414		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7416		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7421		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7422		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7427		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7428		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7429		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7434		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7435		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7440		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7445		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7446		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7451		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7452		METAL CHIP 1.0 (1005)	5%	1/16W
U	R7453		METAL CHIP 2.2 (1005)	5%	1/16W
U	R7454		METAL CHIP 12K(1005)	1%	1/16W
U	R7471		METAL CHIP 4.7K (1005)	5%	1/16W
U	R7477		METAL CHIP 10K(1005)	1%	1/16W
U	R7478		METAL CHIP 10 (1005)	1%	1/16W
U	R7479		METAL CHIP 10 (1005)	1%	1/16W
U	R7480		METAL CHIP 13K(1005)	1%	1/16W
U	R7481		METAL CHIP 13K(1005)	1%	1/16W
U	R7482		METAL CHIP 1.0K (1005)	5%	1/16W
U	R7510		METAL CHIP 2.2(1608)	5%	1/10W
U	R7550		METAL CHIP 100K (1005)	5%	1/16W
U	R7551		METAL CHIP 2.2(1608)	5%	1/10W
U	R7552		METAL CHIP 5.6(1608)	5%	1/10W
U	R7553		METAL CHIP 1(1608)	5%	1/10W
U	R7556		METAL CHIP 3.6K(1005)	1%	1/16W
U	R7557		METAL CHIP 75K(1005)	1%	1/16W
U	R7558		METAL CHIP 18K(1005)	1%	1/16W
U	R7559		METAL CHIP 47K(1005)	1%	1/16W
U	R7560		METAL CHIP 5.6K(1005)	1%	1/16W
U	R7561		METAL CHIP 100K (1005)	5%	1/16W
			< TRANSFORMER >		
S	T5301	1-697-546-22	TRANSFORMER, PULSE		
U	T5301	1-697-547-11	TRANSFORMER, PULSE		

SC	Ref. No.	Part No.	Description	Remark	
			< THERMISTOR(POSITIVE) >		
S	 TH5101	1-804-949-12	THERMISTOR, NTC (SMD)		
S	 TH5103	1-804-949-12	THERMISTOR, NTC (SMD)		
S	 TH7301	1-811-910-11	NTC THERMISTOR (SMD)		
S	 TH7302	1-811-910-11	NTC THERMISTOR (SMD)		
			< VIBRATOR >		
S	X5001	1-814-363-11	QUARTZ CRYSTAL UNIT		
S	X5002	1-814-630-11	QUARTZ CRYSTAL UNITS		
			< EDL-010 >		
S		A-5021-714-A	EDL-010 COMPL		
			< CAPACTOR >		
U	C101	1-122-161-11	CERAMIC CHIP 0.1MF X5R (0603)	10%	16V
U	C105	1-118-031-11	CERAMIC CHIP 0.01MF X5R (0603)	10%	16V
			< CONNECTOR >		
U	CN101	1-816-654-61	FFC/FPC CONNECTOR (LIF) 6P		
U	CN101	1-822-787-21	FFC/FPC CONNECTOR (LIF) 6P		
U	CN101	1-843-455-11	CONNECTOR, FFC/FPC (LIF) 6P		
			< DIODE >		
U	D101	6-503-065-01	DI SML-D13Y8WT86S		
U	D102	6-503-065-01	DI SML-D13Y8WT86S		
U	D103	6-502-395-01	DI SL-1945-WS-SD-T		
U	D104	6-502-395-01	DI SL-1945-WS-SD-T		
U	D105	6-502-395-01	DI SL-1945-WS-SD-T		
U	D106	6-502-395-01	DI SL-1945-WS-SD-T		
U	D109	6-502-383-01	DI CL-1945-HB8-SD-T		
U	D110	6-502-383-01	DI CL-1945-HB8-SD-T		
U	D111	6-502-383-01	DI CL-1945-HB8-SD-T		
U	D112	6-502-383-01	DI CL-1945-HB8-SD-T		
			< TRANSISTOR >		
U	Q101	6-552-948-01	TR DTC043ZUBTL		
U	Q102	6-552-948-01	TR DTC043ZUBTL		
U	Q103	6-552-941-01	TR DTC023JUBTL		
			< RESISTOR >		
U	R101	1-250-608-11	METAL CHIP 470(1608)		
U	R102	1-250-608-11	METAL CHIP 470(1609)		
U	R103	1-250-608-11	METAL CHIP 470(1610)		
U	R104	1-250-608-11	METAL CHIP 470(1611)		
U	R105	1-250-608-11	METAL CHIP 470(1612)		
U	R106	1-250-608-11	METAL CHIP 470(1613)		
U	R109	1-250-598-11	METAL CHIP 180(1608)		
U	R110	1-250-598-11	METAL CHIP 180(1609)		
U	R111	1-250-598-11	METAL CHIP 180(1610)		
U	R112	1-250-598-11	METAL CHIP 180(1611)		

SC	Ref. No.	Part No.	Description	Remark	
			< THERMISTOR(POSITIVE) >		
U	TH101	1-804-949-12	THERMISTOR, NTC (SMD)		
			< EDU-010 >		
S		A-5021-717-A	EDU-010 COMPL		
			< CAPACTOR >		
U	C301		CERAMIC CHIP 220PF X7R 0603	10%	50V
U	C302		CERAMIC CHIP 220PF X7R 0603	10%	50V
			< CONNECTOR >		
U	CN301	1-008-389-11	CONNECTOR, FFC/FPC (LIF) 40P		
U	CN301	1-008-596-11	CONNECTOR, FFC/FPC (LIF) 40P		
U	CN302	1-008-699-11	CONNECTOR, USB 2.0		
U	CN302	1-008-929-11	CONNECTOR, USB 2.0		
U	CN303	1-008-593-11	USB CONNECTOR TYPE-C		
U	CN303	1-008-944-11	USB CONNECTOR TYPE-C		
			< COIL >		
U	L301		COMMON MODE CHOKE COIL		0UH
U	L302		COMMON MODE CHOKE COIL		0UH
U	L303		COMMON MODE CHOKE COIL		0UH
			< EDS-010 (E) >		
S		A-5021-711-A	EDS-010 COMPL(E)		*
S		A-5023-191-A	EDS-010 MOUNT(D)		
			< CONNECTOR >		
U	CN201	1-816-654-61	FFC/FPC CONNECTOR (LIF) 6P		
U	CN201	1-822-787-21	FFC/FPC CONNECTOR (LIF) 6P		
U	CN201	1-843-455-11	CONNECTOR, FFC/FPC (LIF) 6P		
			< SWITCH >		
U	S201	1-798-377-11	SWITCH, TACTILE		
U	S201	1-798-377-21	SWITCH, TACTILE		
U	S201	1-798-576-11	TACTILE SWITCH		
U	S202	1-798-377-11	SWITCH, TACTILE		*
U	S202	1-798-377-21	SWITCH, TACTILE		*
U	S202	1-798-576-11	TACTILE SWITCH		*